## **SIEMENS**

Data sheet 3RW5545-6HA04



SIRIUS soft starter 200-480 V 315 A, 24 V AC/DC Screw terminals

product brand name	SIRIUS		
product category	Hybrid switching devices		
product designation	Soft starter		
product type designation	3RW55		
manufacturer's article number			
<ul> <li>of high feature HMI module usable</li> </ul>	3RW5980-0HF00		
<ul> <li>of communication module PROFINET standard usable</li> </ul>	3RW5980-0CS00		
<ul> <li>of communication module PROFINET high-feature usable</li> </ul>	3RW5950-0CH00		
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00		
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00		
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00		
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00		
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10		
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10		
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10		
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10		
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA		
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA		
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE1334-2; Type of coordination 2, Iq = 65 kA		

General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 50 %
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class acc. to IEC 61557-12	5 %
certificate of suitability	

CE marking	Yes				
UL approval	Yes				
CSA approval					
product component	Yes				
	Yes				
<ul><li>HMI-High Feature</li><li>is supported HMI-High Feature</li></ul>					
	Yes				
product feature integrated bypass contact system	Yes				
number of controlled phases	3				
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2				
current unbalance limiting value [%]	10 60 %				
ground-fault monitoring limiting value [%]	10 95 %				
buffering time in the event of power failure	400				
for main current circuit     for control circuit	100 ms				
• for control circuit	100 ms				
idle time adjustable	0 255 s				
insulation voltage rated value	480 V				
degree of pollution	3, acc. to IEC 60947-4-2				
impulse voltage rated value	6 kV				
blocking voltage of the thyristor maximum	1 400 V				
service factor	1.15				
surge voltage resistance rated value	6 kV				
maximum permissible voltage for safe isolation	400.1/				
between main and auxiliary circuit	480 V; does not apply for thermistor connection				
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting				
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz				
recovery time after overload trip adjustable	60 1 800 s				
utilization category acc. to IEC 60947-4-2	AC 53a				
reference code acc. to IEC 81346-2	_ Q				
Substance Prohibitance (Date)	15.02.2018 00:00:00				
product function					
ramp-up (soft starting)	Yes				
<ul><li>ramp-down (soft stop)</li></ul>	Yes				
<ul><li>breakaway pulse</li></ul>	Yes				
<ul> <li>adjustable current limitation</li> </ul>	Yes				
<ul> <li>creep speed in both directions of rotation</li> </ul>	Yes				
<ul><li>pump ramp down</li></ul>	Yes				
DC braking	Yes				
<ul><li>motor heating</li></ul>	Yes				
<ul> <li>slave pointer function</li> </ul>	Yes				
trace function	Yes				
<ul> <li>intrinsic device protection</li> </ul>	Yes				
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.				
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick				
• inside-delta circuit	Yes				
auto-RESET	Yes				
manual RESET	Yes				
• remote reset	Yes				
communication function	Yes				
<ul> <li>operating measured value display</li> </ul>	Yes				
event list	Yes				
error logbook	Yes				
via software parameterizable	Yes				
via software configurable	Yes				
	res				
screw terminal	Yes				
<ul> <li>screw terminal</li> <li>spring-type terminal</li> <li>PROFlenergy</li> </ul>	Yes				

	Feature communication modules				
• firmware update	Yes				
removable terminal for control circuit	Yes				
voltage ramp	Yes Yes				
torque control	Yes				
combined braking	Yes				
analog output					
programmable control inputs/outputs	Yes; 4 20 mA (default) / 0 10 V Yes				
condition monitoring	Yes				
automatic parameterisation	Yes				
application wizards	Yes				
alternative run-down	Yes				
emergency operation mode	Yes Yes				
reversing operation	Yes				
soft starting at heavy starting conditions	Yes				
Power Electronics					
operational current					
at 40 °C rated value	315 A				
at 40 °C rated value minimum	63 A				
• at 50 °C rated value	279 A				
at 60 °C rated value	255 A				
operational current at inside-delta circuit					
at 40 °C rated value	546 A				
• at 50 °C rated value	483 A				
• at 60 °C rated value	442 A				
operating voltage					
rated value	200 480 V				
<ul> <li>at inside-delta circuit rated value</li> </ul>	200 480 V				
relative negative tolerance of the operating voltage	-15 %				
relative positive tolerance of the operating voltage	10 %				
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %				
	-15 % 10 %				
inside-delta circuit relative positive tolerance of the operating voltage at					
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit					
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors	10 %				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors  • at 230 V at 40 °C rated value	10 % 90 kW				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value	10 % 90 kW 160 kW				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value	10 %  90 kW 160 kW 160 kW				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value	10 %  90 kW 160 kW 160 kW 315 kW				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 %				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency  relative positive tolerance of the operating frequency	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 %				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 %				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %	90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup  power loss [W] at AC at current limitation 350 % • at 40 °C during startup	90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  95 W 84 W 77 W				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup	90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value  • at 230 V at inside-delta circuit at 40 °C rated value  • at 400 V at 40 °C rated value  • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection	90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  o at 60 °C after startup  at 60 °C during startup • at 60 °C during startup  o at 60 °C during startup  type of the motor protection  Control circuit/ Control	90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  • at 60 °C after startup  o at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage	10 %  90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  o at 60 °C after startup  o at 40 °C during startup  o at 50 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage control supply voltage at AC	90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor				
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value	90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor  AC/DC				
inside-delta circuit  relative positive tolerance of the operating voltage at inside-delta circuit  operating power for 3-phase motors  • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value  Operating frequency 1 rated value  Operating frequency 2 rated value  relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]  power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup  o at 60 °C after startup  o at 40 °C during startup  o at 50 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage control supply voltage at AC	90 kW 160 kW 160 kW 315 kW 50 Hz 60 Hz -10 % 10 % 10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor				

voltage at AC at 50 Hz					
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %				
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %				
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %				
control supply voltage frequency	50 60 Hz				
relative negative tolerance of the control supply voltage frequency	-10 %				
relative positive tolerance of the control supply voltage frequency	10 %				
control supply voltage					
at DC rated value	24 V				
relative negative tolerance of the control supply voltage at DC	-20 %				
relative positive tolerance of the control supply voltage at DC	20 %				
control supply current in standby mode rated value	440 mA				
holding current in bypass operation rated value	720 mA				
locked-rotor current at close of bypass contact maximum	6.7 A				
inrush current peak at application of control supply voltage maximum	7.5 A				
duration of inrush current peak at application of control supply voltage	20 ms				
design of the overvoltage protection	Varistor				
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply				
Inputs/ Outputs					
number of digital inputs	4				
parameterizable	4				
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick				
number of digital outputs	4				
number of digital outputs parameterizable	3				
<ul> <li>number of digital outputs not parameterizable</li> </ul>	1				
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)				
number of analog outputs	1				
switching capacity current of the relay outputs					
<ul> <li>at AC-15 at 250 V rated value</li> </ul>	3 A				
<ul> <li>at DC-13 at 24 V rated value</li> </ul>	1 A				
Installation/ mounting/ dimensions					
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)				
fastening method	screw fixing				
height	393 mm				
width	210 mm				
depth	203 mm				
required spacing with side-by-side mounting					
<ul><li>forwards</li></ul>	10 mm				
• backwards	0 mm				
• upwards	100 mm				
• downwards	75 mm				
at the side	5 mm				
weight without packaging	10.2 kg				
Connections/ Terminals					
type of electrical connection					
type of electrical connection • for main current circuit	busbar connection				
type of electrical connection	screw-type terminals				
type of electrical connection • for main current circuit					

<ul> <li>with conductor cross-section = 0.5 mm² maximum</li> </ul>	50 m			
<ul> <li>with conductor cross-section = 1.5 mm² maximum</li> </ul>	150 m			
• with conductor cross-section = 2.5 mm² maximum	250 m			
type of connectable conductor cross-sections				
<ul> <li>for DIN cable lug for main contacts stranded</li> </ul>	2x (50 240 mm²)			
for DIN cable lug for main contacts finely stranded	2x (70 240 mm²)			
type of connectable conductor cross-sections				
<ul> <li>for control circuit solid</li> </ul>	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)			
<ul> <li>for control circuit finely stranded with core end</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)			
processing				
at AWG cables for control circuit solid	1x (20 12), 2x (20 14)			
wire length				
<ul> <li>between soft starter and motor maximum</li> </ul>	800 m			
at the digital inputs at DC maximum	1 000 m			
tightening torque				
<ul> <li>for main contacts with screw-type terminals</li> </ul>	14 24 N·m			
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m			
terminals tightening torque [lbf·in]				
for main contacts with screw-type terminals	124 210 lbf·in			
•	7 10.3 lbf·in			
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	7 10.3 IDPIII			
Ambient conditions				
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog			
ambient temperature	o doo iii, bordang do di 1000 iii, doo datalog			
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or			
s daming operation	above			
<ul> <li>during storage and transport</li> </ul>	-40 +80 °C			
environmental category				
during operation acc. to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt			
	mist), 3S2 (sand must not get into the devices), 3M6			
<ul> <li>during storage acc. to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must			
1	not get inside the devices), 1M4			
• during transport acc. to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)			
EMC emitted interference	acc. to IEC 60947-4-2: Class A			
Communication/ Protocol				
Communication/ Protocol communication module is supported				
Communication/ Protocol  communication module is supported  • PROFINET standard	Yes			
Communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature	Yes			
Communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP	Yes Yes			
Communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU	Yes Yes Yes			
communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP	Yes Yes Yes Yes			
Communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP  • PROFIBUS	Yes Yes Yes			
Communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP  • PROFIBUS  UL/CSA ratings	Yes Yes Yes Yes			
Communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP  • PROFIBUS	Yes Yes Yes Yes			
Communication/ Protocol  communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus RTU PROFIBUS  UL/CSA ratings  manufacturer's article number of circuit breaker	Yes Yes Yes Yes Yes Yes			
Communication/ Protocol  communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings manufacturer's article number	Yes Yes Yes Yes			
Communication/ Protocol  communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus RTU PROFIBUS  UL/CSA ratings  manufacturer's article number of circuit breaker  usable for Standard Faults at 460/480 V	Yes Yes Yes Yes Yes Yes			
communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP  • PROFIBUS  UL/CSA ratings  manufacturer's article number  • of circuit breaker  — usable for Standard Faults at 460/480 V according to UL  — usable for High Faults at 460/480 V at	Yes Yes Yes Yes Yes Yes Yes Yes Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65			
communication/ Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP  • PROFIBUS  UL/CSA ratings  manufacturer's article number  • of circuit breaker  — usable for Standard Faults at 460/480 V according to UL  — usable for High Faults at 460/480 V according to UL	Yes Yes Yes Yes Yes Yes Yes Yes  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA			
communication / Protocol  communication module is supported  • PROFINET standard  • PROFINET high-feature  • EtherNet/IP  • Modbus RTU  • Modbus TCP  • PROFIBUS  UL/CSA ratings  manufacturer's article number  • of circuit breaker  — usable for Standard Faults at 460/480 V according to UL  — usable for High Faults at 460/480 V at inside-delta circuit according to UL  — usable for High Faults at 460/480 V at inside-delta circuit according to UL  — usable for High Faults at 460/480 V at inside-	Yes Yes Yes Yes Yes Yes Yes  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA Siemens type: 3VA54, max. 600 A; Iq = 18 kA			
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for Standard Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 450/480 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V	Yes Yes Yes Yes Yes Yes Yes Yes  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA  Siemens type: 3VA54, max. 600 A; Iq = 18 kA  Siemens type: 3VA54, max. 600 A; Iq max = 65 kA			
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number  of circuit breaker  usable for Standard Faults at 460/480 V according to UL  usable for Standard Faults at 460/480 V at inside-delta circuit according to UL  usable for High Faults at 460/480 V at inside-delta circuit according to UL  usable for High Faults at 460/480 V at inside-delta circuit according to UL  usable for Standard Faults at 575/600 V according to UL  usable for Standard Faults at 575/600 V at inside-delta circuit according to UL  usable for High Faults at 575/600 V at inside-	Yes Yes Yes Yes Yes Yes Yes Yes  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA Siemens type: 3VA54, max. 600 A; Iq = 18 kA Siemens type: 3VA54, max. 600 A; Iq max = 65 kA Siemens type: 3VA54, max. 600 A; Iq max = 65 kA Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA			
communication module is supported  PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS  UL/CSA ratings  manufacturer's article number  of circuit breaker  usable for Standard Faults at 460/480 V according to UL  usable for High Faults at 460/480 V at inside-delta circuit according to UL  usable for High Faults at 460/480 V at inside-delta circuit according to UL  usable for High Faults at 450/480 V at inside-delta circuit according to UL  usable for High Faults at 575/600 V according to UL  usable for Standard Faults at 575/600 V at inside-delta circuit according to UL  usable for High Faults at 575/600 V at inside-delta circuit according to UL  usable for Standard Faults at 575/600 V at inside-delta circuit according to UL  usable for Standard Faults at 575/600 V at	Yes Yes Yes Yes Yes Yes Yes  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 18 kA  Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA  Siemens type: 3VA54, max. 600 A; Iq = 18 kA  Siemens type: 3VA54, max. 600 A; Iq max = 65 kA  Siemens type: 3VA54, max. 600 A; Iq max = 65 kA  Siemens type: 3VA54, max. 600 A; Iq max = 65 kA			

<ul> <li>usable for Standard Faults up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1000 A; Iq = 18 kA				
<ul> <li>usable for High Faults up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1000 A; Iq = 100 kA				
<ul> <li>usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1000 A; Iq = 18 kA				
<ul> <li>usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 1000 A; Iq = 100 kA				
operating power [hp] for 3-phase motors					
<ul> <li>at 200/208 V at 50 °C rated value</li> </ul>	75 hp				
• at 220/230 V at 50 °C rated value	100 hp				
<ul> <li>at 460/480 V at 50 °C rated value</li> </ul>	200 hp				
<ul> <li>at 200/208 V at inside-delta circuit at 50 °C rated value</li> </ul>	150 hp				
<ul> <li>at 220/230 V at inside-delta circuit at 50 °C rated value</li> </ul>	200 hp				
• at 460/480 V at inside-delta circuit at 50 °C rated value	400 hp				
contact rating of auxiliary contacts according to UL	R300-B300				
Safety related data					
protection class IP on the front acc. to IEC 60529	IP00; IP20 with cover				
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front with cover				
electromagnetic compatibility	acc. to IEC 60947-4-2				
ATEX					
certificate of suitability					
• ATEX	Yes				
• IECEx	Yes				
<ul> <li>according to ATEX directive 2014/34/EU</li> </ul>	BVS 18 ATEX F 003 X				
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]				
hardware fault tolerance acc. to IEC 61508 relating to ATEX	0				
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX	0.008				
PFHD with high demand rate acc. to EN 62061 relating to ATEX	0.0000005 1/h				
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX	SIL1				
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX	3 y				
Certificates/ approvals					
General Product Approval		EMC	For use in hazard- ous locations		













For use in hazardous locations Declaration of Conformity

**Test Certificates** 

Marine / Shipping





Type Test Certificates/Test Report







Marine / Shipping

other







## **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5545-6HA04

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RW5545-6HA04}\\$ 

 ${\bf Service \& Support~(Manuals,~Certificates,~Characteristics,~FAQs,...)}$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RW5545-6HA04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5545-6HA04&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5545-6HA04/char


Characteristic: Installation altitude

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

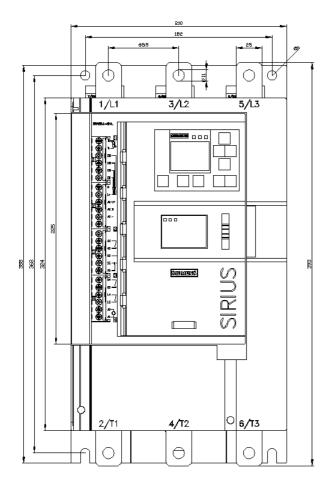

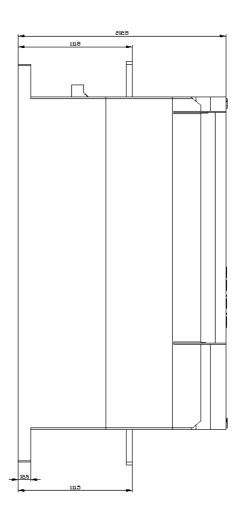

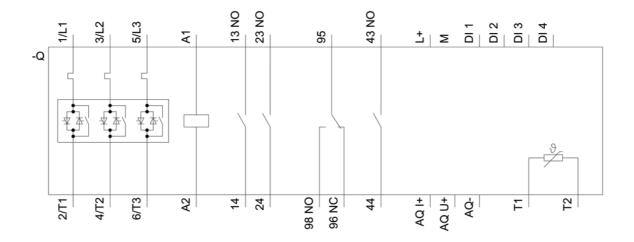

last modified: 3/9/2021 🖸