## SIEMENS

## Data sheet

## 3RU2116-1BJ0



Overload relay 1.4...2.0 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Ring cable lug Auxiliary circuit: ring cable lug Manual-Automatic-Reset

product brand name	SIRIUS			
product designation	thermal overload relay			
product type designation	3RU2			
General technical data				
size of overload relay	S00			
size of contactor can be combined company-specific	S00			
power loss [W] for rated value of the current at AC in hot operating state	5.7 W			
• per pole	1.9 W			
insulation voltage with degree of pollution 3 at AC rated value	690 V			
surge voltage resistance rated value	6 kV			
maximum permissible voltage for safe isolation in networks with grounded star point				
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V			
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V			
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V			
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V			
shock resistance acc. to IEC 60068-2-27	8g / 11 ms			
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD			
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001			
reference code acc. to IEC 81346-2	F			
Substance Prohibitance (Date)	01.10.2009 00:00:00			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
<ul> <li>during operation</li> </ul>	-40 +70 °C			
<ul> <li>during storage</li> </ul>	-55 +80 °C			
during transport	-55 +80 °C			
temperature compensation	-40 +60 °C			
relative humidity during operation	10 95 %			
Main circuit				
number of poles for main current circuit	3			
adjustable current response value current of the current-dependent overload release	1.4 2 A			
operating voltage				
<ul> <li>rated value</li> </ul>	690 V			
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V			
operating frequency rated value	50 60 Hz			

operational current rated value	2 A			
operating power at AC-3				
at 400 V rated value	0.75 kW			
at 500 V rated value	0.75 kW			
at 690 V rated value	1.1 kW			
Auxiliary circuit	1.1 KW			
design of the auxiliary switch	integrated			
number of NC contacts for auxiliary contacts	integrated 1			
-				
note     number of NO contacts for suviliary contacts	for contactor disconnection 1			
<ul> <li>number of NO contacts for auxiliary contacts</li> <li>note</li> </ul>	for message "Tripped"			
	0			
number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15	0			
• at 24 V	3 A			
• at 24 v	3 A			
• at 120 V	3 A			
• at 125 V	3 A			
• at 125 V • at 230 V	2 A			
• at 230 V • at 400 V	2 A 1 A			
• at 400 V operational current of auxiliary contacts at DC-13				
• at 24 V	2 A			
• at 24 V • at 60 V	2 A 0.3 A			
• at 50 V • at 110 V	0.3 A 0.22 A			
• at 125 V	0.22 A 0.22 A			
• at 220 V	0.22 A			
contact rating of auxiliary contacts according to UL	B600 / R300			
Protective and monitoring functions	50077000			
trip class	CLASS 10			
design of the overload release	thermal			
UL/CSA ratings	troma			
full-load current (FLA) for 3-phase AC motor				
at 480 V rated value	2 A			
at 600 V rated value	2 A			
Short-circuit protection				
design of the fuse link				
design of the fuse link				
<ul> <li>design of the fuse link</li> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gG: 6 A, quick: 10 A			
<ul> <li>for short-circuit protection of the auxiliary switch</li> </ul>	fuse gG: 6 A, quick: 10 A			
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	fuse gG: 6 A, quick: 10 A any			
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>				
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	any			
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	any Contactor mounting			
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	any Contactor mounting 76 mm			
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	any Contactor mounting 76 mm 45 mm			
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	any Contactor mounting 76 mm 45 mm			
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	any Contactor mounting 76 mm 45 mm 70 mm			
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary	any Contactor mounting 76 mm 45 mm 70 mm			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit	any Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable connection			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit arrangement of electrical connectors for main current	any Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     e for auxiliary and control circuit arrangement of electrical connectors for main current circuit	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable connection			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable connection Top and bottom			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque     for main contacts for ring cable lug	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable lug connection Top and bottom			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque     for main contacts for ring cable lug     for auxiliary contacts for ring cable lug	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable lug connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection     for main current circuit     e for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  tightening torque     for auxiliary contacts for ring cable lug     outer diameter of the usable ring cable lug maximum	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     ofor auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque     for auxiliary contacts for ring cable lug     outer diameter of the usable ring cable lug design of screwdriver shaft	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     ofor auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque     for auxiliary contacts for ring cable lug     for auxiliary contacts for ring cable lug     outer diameter of the usable ring cable lug maximum design of screwdriver shaft size of the screwdriver tip	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable lug connection 70 p and bottom 1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque     for main contacts for ring cable lug     for auxiliary contacts for ring cable lug     outer diameter of the usable ring cable lug design of screwdriver shaft size of the screwdriver tip design of the thread of the connection screw	any         Contactor mounting         76 mm         45 mm         70 mm         No         Ring cable lug connection         ring cable connection         Top and bottom         1.2 0.8 N·m         0.8 1.2 N·m         7.5 mm         Diameter 5 6 mm         Pozidriv PZ 2			
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     ofor auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque     for auxiliary contacts for ring cable lug     for auxiliary contacts for ring cable lug     outer diameter of the usable ring cable lug maximum design of screwdriver shaft size of the screwdriver tip	any Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm			

Safety related data							
failure rate [FIT] with low demand rate acc. to SN 31920			50 FIT	-			
MTTF with high demand rate		2 280	у				
T1 value for proof test interval or service life acc. to IEC 61508		20 y					
protection class IP on the front acc. to IEC 60529			IP00				
Display							
display version for switching status S			Slide s	switch			
Certificates/ approvals							
General Product Approval					For use in hazardous locations		
S.	CCC			EHC	K ATEX	IECEx	
Declaration of Conformity	Test Certificates			Marine / Shipping			
CE EG-Konf.	<u>Type Test Certific-</u> ates/Test Report	Special Test Ce ate	<u>ertific-</u>	ABS	BUREAU VERITAS	Lloyd's Register uis	
Marine / Shipping					other	Railway	
PRS	RINA	KMRS RMRS		DNV-GL DNV-GL	<u>Confirmation</u>	Vibration and Shock	
Further information Information- and Do https://www.siemens.	wnloadcenter (Catalo	ogs, Brochures,.	)				

nups://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1BJ0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1BJ0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1BJ0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-1BJ0&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1BJ0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1BJ0&objecttype=14&gridview=view1

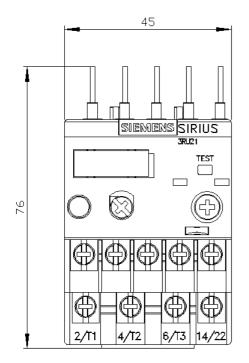

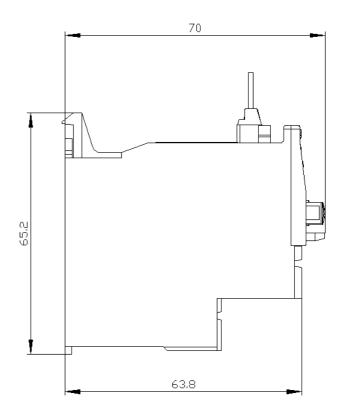

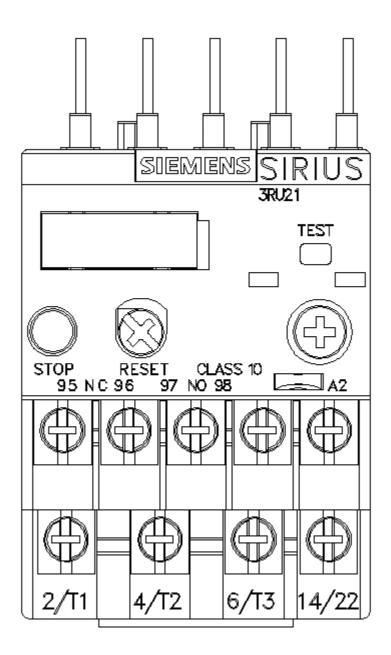

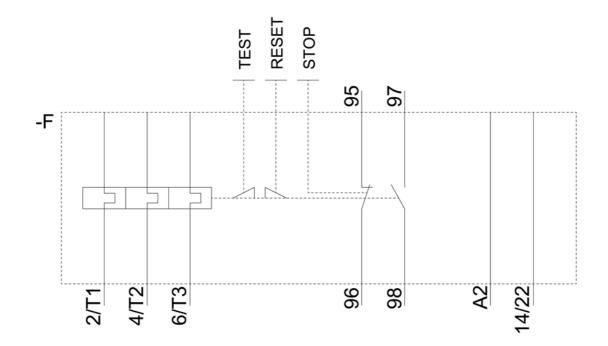

last modified:

1/18/2021 🖸