## SIEMENS

## Data sheet

## 3RU2116-1CJ0



Overload relay 1.8...2.5 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Ring cable lug Auxiliary circuit: ring cable lug Manual-Automatic-Reset

product brand name	SIRIUS		
product designation	thermal overload relay		
product type designation	3RU2		
General technical data			
size of overload relay	S00		
size of contactor can be combined company-specific	S00		
power loss [W] for rated value of the current at AC in hot operating state	5.7 W		
• per pole	1.9 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
maximum permissible voltage for safe isolation in networks with grounded star point			
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V		
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V		
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V		
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V		
shock resistance acc. to IEC 60068-2-27	8g / 11 ms		
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD		
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001		
reference code acc. to IEC 81346-2	F		
Substance Prohibitance (Date)	01.10.2009 00:00:00		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
<ul> <li>during operation</li> </ul>	-40 +70 °C		
<ul> <li>during storage</li> </ul>	-55 +80 °C		
during transport	-55 +80 °C		
temperature compensation	-40 +60 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
adjustable current response value current of the current-dependent overload release	1.8 2.5 A		
operating voltage			
<ul> <li>rated value</li> </ul>	690 V		
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V		
operating frequency rated value	50 60 Hz		

operational current rated value	2.5 A		
operating power at AC-3			
at 400 V rated value	0.75 kW		
at 500 V rated value	1.1 kW		
at 690 V rated value	1.5 kW		
Auxiliary circuit	1.5 KVV		
design of the auxiliary switch	integrated		
number of NC contacts for auxiliary contacts	integrated		
note	1 for contactor disconnection		
number of NO contacts for auxiliary contacts			
note	for message "Tripped"		
number of CO contacts for auxiliary contacts	0		
operational current of auxiliary contacts at AC-15	0		
• at 24 V	3 A		
• at 110 V	3 A		
• at 120 V	3 A		
• at 125 V	3 A		
• at 230 V	2 A		
• at 400 V	1A		
operational current of auxiliary contacts at DC-13			
• at 24 V	2 A		
• at 60 V	0.3 A		
• at 110 V	0.22 A		
• at 125 V	0.22 A		
• at 220 V	0.11 A		
contact rating of auxiliary contacts according to UL	B600 / R300		
Protective and monitoring functions			
trip class	CLASS 10		
design of the overload release	thermal		
UL/CSA ratings			
full-load current (FLA) for 3-phase AC motor			
at 480 V rated value	2.5 A		
at 600 V rated value	2.5 A		
Short-circuit protection			
design of the fuse link			
<ul> <li>for short-circuit protection of the auxiliary switch</li> </ul>	fuse gG: 6 A, quick: 10 A		
required			
•			
Installation/ mounting/ dimensions			
Installation/ mounting/ dimensions mounting position	any		
	any Contactor mounting		
mounting position			
mounting position fastening method	Contactor mounting		
mounting position fastening method height	Contactor mounting 76 mm		
mounting position fastening method height width	Contactor mounting 76 mm 45 mm		
mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary	Contactor mounting 76 mm 45 mm		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit	Contactor mounting 76 mm 45 mm 70 mm		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection	Contactor mounting 76 mm 45 mm 70 mm No		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection ring cable connection		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection ring cable connection		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection ring cable connection		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection ring cable connection Top and bottom		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug	Contactor mounting 76 mm 45 mm 70 mm No Ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug	Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for screwdriver shaft         size of the screwdriver tip	Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm		
mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for screwdriver shaft         size of the screwdriver tip         design of the thread of the connection screw	Contactor mounting 76 mm 45 mm 70 mm No No Ring cable lug connection ring cable connection Top and bottom 1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm Pozidriv PZ 2		

Safety related data						
failure rate [FIT] with low demand rate acc. to SN 31920			50 FIT			
MTTF with high demand rate		2 280 y				
T1 value for proof test interval or service life acc. to IEC 61508		20 у				
protection class IP on the front acc. to IEC 60529			IP00			
Display						
display version for switching status			Slide switch			
Certificates/ approval	ls					
General Product A	pproval	For use in ha	For use in hazardous locations			
(SP) M	CCC		EA	IECEx	K ATEX	
Declaration of Conformity	Test Certificates		Marine / St	iipping		
CE EG-Konf.	Special Test Certific- ate	<u>Type Test Cer</u> ates/Test Re	tific- port	B U REAL VERITAS	Lloyd's Register uis	
Marine / Shipping				other	Railway	
PRS	RINA	KMRS RMRS	DNV-G	Confirmati	on <u>Vibration and Shock</u>	
Further information Information- and Do https://www.siemens	ownloadcenter (Catalog .com/ic10	js, Brochures,.	)			

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1CJ0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1CJ0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1CJ0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-1CJ0&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1CJ0/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1CJ0&objecttype=14&gridview=view1

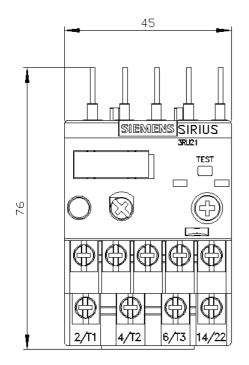

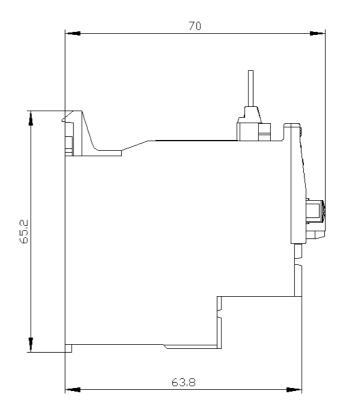

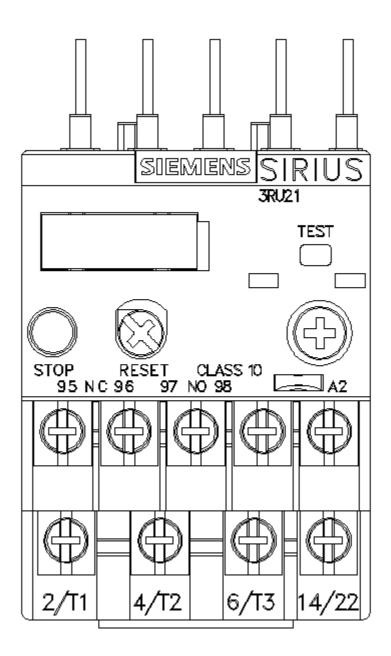

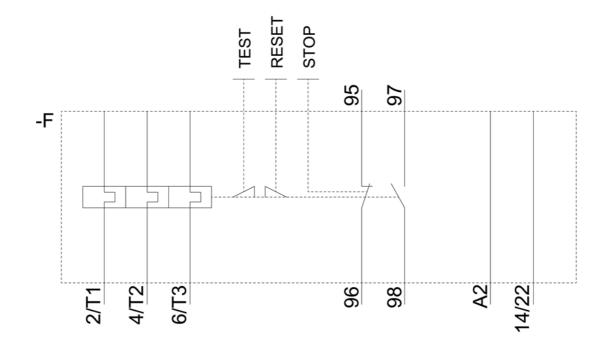

last modified:

1/18/2021 🖸