## **SIEMENS**

Data sheet 3RU2116-1JJ0



Overload relay 7.0...10 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Ring cable lug Auxiliary circuit: ring cable lug Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	6.6 W
• per pole	2.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
between main and auxiliary circuit	440 V
shock resistance acc. to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code acc. to IEC 81346-2	F
Substance Prohibitance (Date)	01.10.2009 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul><li>during operation</li></ul>	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	7 10 A
operating voltage	
rated value	690 V
at AC-3 rated value maximum	690 V
operating frequency rated value	50 60 Hz

	40.4
operational current rated value	10 A
operating power at AC-3	
<ul> <li>at 400 V rated value</li> </ul>	4 kW
<ul> <li>at 500 V rated value</li> </ul>	5.5 kW
at 690 V rated value	7.5 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
operational current of auxiliary contacts at DC-13	0.0
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	21.122.12
trip class	CLASS 10
design of the overload release	thermal
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	10 A
at 600 V rated value	10 A
Short-circuit protection	
design of the fuse link	
•	
for short-circuit protection of the auxiliary switch	fuse gG: 6 A, quick: 10 A
for short-circuit protection of the auxiliary switch required	fuse gG: 6 A, quick: 10 A
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position	any
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method	any Contactor mounting
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method height	any Contactor mounting 76 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width	any Contactor mounting 76 mm 45 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth	any Contactor mounting 76 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals	any Contactor mounting 76 mm 45 mm 70 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth	any Contactor mounting 76 mm 45 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals product component removable terminal for auxiliary	any Contactor mounting 76 mm 45 mm 70 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals product component removable terminal for auxiliary and control circuit	any Contactor mounting 76 mm 45 mm 70 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	any Contactor mounting 76 mm 45 mm 70 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection     for main current circuit	any Contactor mounting 76 mm 45 mm 70 mm  No
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit arrangement of electrical connectors for main current circuit	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit  arrangement of electrical connectors for main current circuit tightening torque	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection Top and bottom
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit  arrangement of electrical connectors for main current circuit tightening torque     for main contacts for ring cable lug	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection Top and bottom
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit  arrangement of electrical connectors for main current circuit tightening torque     for main contacts for ring cable lug     for auxiliary contacts for ring cable lug     for auxiliary contacts for ring cable lug	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection     for main current circuit     for auxiliary and control circuit  arrangement of electrical connectors for main current circuit tightening torque     for main contacts for ring cable lug     for auxiliary contacts for ring cable lug outer diameter of the usable ring cable lug maximum	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit  arrangement of electrical connectors for main current circuit tightening torque     for main contacts for ring cable lug     outer diameter of the usable ring cable lug maximum design of screwdriver shaft	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection     for main current circuit     for auxiliary and control circuit  arrangement of electrical connectors for main current circuit tightening torque     for main contacts for ring cable lug     outer diameter of the usable ring cable lug maximum design of screwdriver shaft size of the screwdriver tip design of the thread of the connection screw	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm Pozidriv PZ 2
for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring cable connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm

Safety related data		
failure rate [FIT] with low demand rate acc. to SN 31920	50 FIT	
MTTF with high demand rate	2 280 y	
T1 value for proof test interval or service life acc. to IEC 61508	20 y	
protection class IP on the front acc. to IEC 60529	IP00	
Display		
display version for switching status	Slide switch	

Certificates/ approvals

**General Product Approval** 

For use in hazardous locations













**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping



Special Test Certificate

Type Test Certificates/Test Report







Marine / Shipping

other Railway









Confirmation

Vibration and Shock

## **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1JJ0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1JJ0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1JJ0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-1JJ0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1JJ0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1JJ0&objecttype=14&gridview=view1

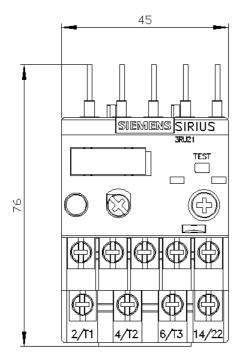

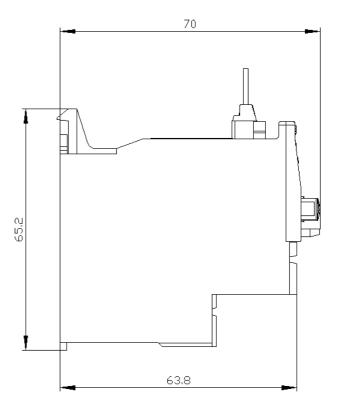

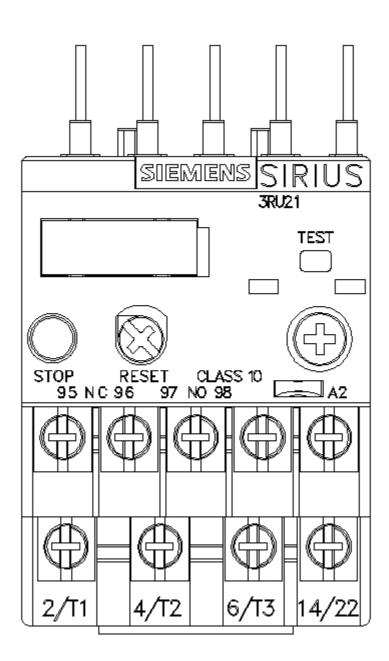

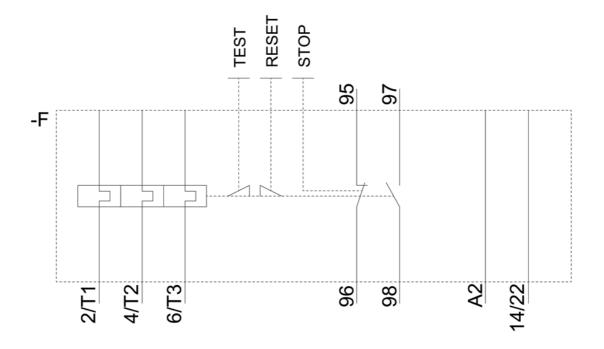

last modified: 1/18/2021 **C**