SIEMENS

Data sheet

3RU2126-1EB0




Overload relay 2.8...4.0 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset


product brand name				
product brand name	SIRIUS			
product designation	thermal overload relay 3RU2			
product type designation	JRU2			
General technical data				
size of overload relay	SO			
size of contactor can be combined company-specific	S0			
power loss [W] for rated value of the current at AC in hot operating state	5.7 W			
• per pole	1.9 W			
insulation voltage with degree of pollution 3 at AC rated value	690 V			
surge voltage resistance rated value	6 kV			
maximum permissible voltage for safe isolation in networks with grounded star point				
 between auxiliary and auxiliary circuit 	440 V			
 between auxiliary and auxiliary circuit 	440 V			
 between main and auxiliary circuit 	440 V			
 between main and auxiliary circuit 	440 V			
shock resistance acc. to IEC 60068-2-27	8g / 11 ms			
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD			
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001			
reference code acc. to IEC 81346-2	F			
Substance Prohibitance (Date)	01.10.2009 00:00:00			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
 during operation 	-40 +70 °C			
 during storage 	-55 +80 °C			
during transport	-55 +80 °C			
temperature compensation	-40 +60 °C			
relative humidity during operation	10 95 %			
Main circuit				
number of poles for main current circuit	3			
adjustable current response value current of the current-dependent overload release	2.8 4 A			
operating voltage				
 rated value 	690 V			
 at AC-3 rated value maximum 	690 V			
operating frequency rated value	50 60 Hz			


operational ourrent rated value	4 A			
operational current rated value	4 A			
operating power at AC-3	4 5 100			
• at 400 V rated value	1.5 kW			
at 500 V rated value	2.2 kW			
• at 690 V rated value	3 kW			
Auxiliary circuit				
design of the auxiliary switch	integrated			
number of NC contacts for auxiliary contacts	1			
note	for contactor disconnection			
number of NO contacts for auxiliary contacts	1			
note	for message "Tripped"			
number of CO contacts for auxiliary contacts	0			
operational current of auxiliary contacts at AC-15				
• at 24 V	3 A			
● at 110 V	3 A			
• at 120 V	3 A			
• at 125 V	3 A			
● at 230 V	2 A			
• at 400 V	1 A			
operational current of auxiliary contacts at DC-13				
• at 24 V	2 A			
• at 60 V	0.3 A			
• at 110 V	0.22 A			
• at 125 V	0.22 A			
• at 220 V	0.11 A			
contact rating of auxiliary contacts according to UL	B600 / R300			
Protective and monitoring functions				
trip class	CLASS 10			
design of the overload release	thermal			
UL/CSA ratings				
full-load current (FLA) for 3-phase AC motor				
• at 480 V rated value	4 A			
 at 600 V rated value 	4 A			
Short-circuit protection				
design of the fuse link				
for short-circuit protection of the auxiliary switch	fuse gG: 6 A, quick: 10 A			
required				
Installation/ mounting/ dimensions				
mounting position	any			
fastening method	Contactor mounting			
height	85 mm			
width	45 mm			
depth	85 mm			
Connections/ Terminals				
product component removable terminal for auxiliary	No			
and control circuit				
type of electrical connection for main current circuit 	screw-type terminals			
type of electrical connection • for main current circuit				
type of electrical connection	screw-type terminals screw-type terminals Top and bottom			
 type of electrical connection for main current circuit for auxiliary and control circuit 	screw-type terminals			
type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	screw-type terminals			
type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit	screw-type terminals			
type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	screw-type terminals			
type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	screw-type terminals Top and bottom			
type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	screw-type terminals Top and bottom 2x (1 2,5 mm²), 2x (2,5 10 mm²)			
type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing	screw-type terminals Top and bottom 2x (1 2,5 mm²), 2x (2,5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²			
type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid or stranded finely stranded with core end processing at AWG cables for main contacts 	screw-type terminals Top and bottom 2x (1 2,5 mm²), 2x (2,5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²			
type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections for main contacts solid or stranded finely stranded with core end processing at AWG cables for main contacts type of connectable conductor cross-sections	screw-type terminals Top and bottom 2x (1 2,5 mm²), 2x (2,5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²			
type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing • at AWG cables for main contacts type of connectable conductor cross-sections • for auxiliary contacts	screw-type terminals Top and bottom 2x (1 2,5 mm ²), 2x (2,5 10 mm ²) 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² 2x (16 12), 2x (14 8)			


 at AWG cables for an 	uxiliary contacts		2x (20	0 16), 2x (18 14)			
tightening torque							
 for main contacts with screw-type terminals 			2 2.5 N·m				
 for auxiliary contacts with screw-type terminals 		s	0.8 1.2 N·m				
design of screwdriver shaft			Diameter 5 6 mm				
size of the screwdriver tip			Pozidriv PZ 2				
design of the thread of th	ne connection screw						
 for main contacts 			M4				
 of the auxiliary and control contacts 			M3				
Safety related data							
failure rate [FIT] with low demand rate acc. to SN 31920			50 FIT				
MTTF with high demand rate			2 280 у				
T1 value for proof test int IEC 61508	T1 value for proof test interval or service life acc. to IEC 61508		20 у				
protection class IP on the	e front acc. to IEC 60529	•	IP20				
touch protection on the f	ront acc. to IEC 60529		finger-safe, for vertical contact from the front				
Display							
display version for switchin	ig status		Slide	switch			
Certificates/ approvals	•						
					For use in hazardo		
General Product Approv	ai				FOI USE III IIdzaluu		
(SP)	CCC	(ال س		EHC	Ex ATEX	IECEx	
Declaration of Conformity Te	st Certificates			Marine / Shipping			
EG-Konf.		<u>e Test Certi</u> s/Test Repo		ABS	BUREAU VERITAS	Lloyd's Register uis	
Marine / Shipping					other	Railway	
PRS	RINA	KARS RARS		Chrysterson Market	<u>Confirmation</u>	Vibration and Shock	
Further information	adcenter (Cataloos, Bro	ochures	.)				
https://www.siemens.com/i Industry Mall (Online ord https://mall.industry.siemen Cax online generator http://support.automation.s Service&Support (Manua https://support.industry.siel	ic10 ering system) ns.com/mall/en/en/Catalon iemens.com/WW/CAXoro Ils, Certificates, Charact	g/product? der/default. teristics, F	?mlfb=3 :.aspx?l F AQs,	lang=en&mlfb=3RU21	<u>26-1EB0</u>		
Intege database (product http://www.automation.sier Characteristic: Tripping of https://support.industry.siel Further characteristics (c	images, 2D dimension nens.com/bilddb/cax_de.c characteristics, I²t, Let.t mens.com/cs/ww/en/ps/3	drawings, aspx?mlfb= hrough cu RU2126-18	, 3D m =3RU2 urrent EB0/ch	126-1EB0⟨=en	diagrams, EPLAN ma	acros,)	

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-1EB0&objecttype=14&gridview=view1

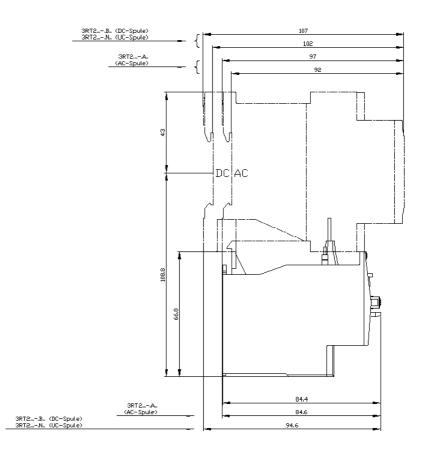



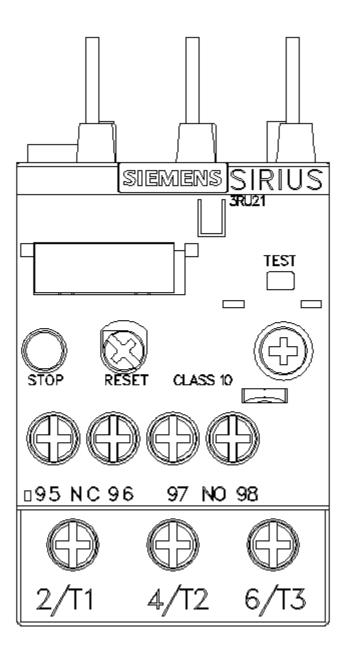

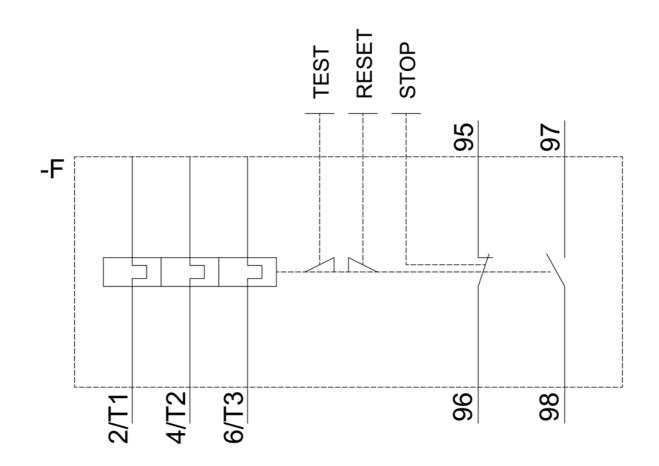

last modified:

12/15/2020 🖸