SIEMENS

Data sheet

3RU2126-1EJ0



Overload relay 2.8...4.0 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Ring cable lug Auxiliary circuit: ring cable lug Manual-Automatic-Reset

| product brand name | SIRIUS | | | |
|--|------------------------|--|--|--|
| product designation | thermal overload relay | | | |
| product type designation | 3RU2 | | | |
| General technical data | 51102 | | | |
| | S0 | | | |
| size of overload relay | SO | | | |
| size of contactor can be combined company-specific | | | | |
| power loss [W] for rated value of the current at AC in hot operating state | 5.7 W | | | |
| • per pole | 1.9 W | | | |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V | | | |
| surge voltage resistance rated value | 6 kV | | | |
| maximum permissible voltage for safe isolation in networks with grounded star point | | | | |
| between auxiliary and auxiliary circuit | 440 V | | | |
| between auxiliary and auxiliary circuit | 440 V | | | |
| between main and auxiliary circuit | 440 V | | | |
| between main and auxiliary circuit | 440 V | | | |
| shock resistance acc. to IEC 60068-2-27 | 8g / 11 ms | | | |
| type of protection according to ATEX directive 2014/34/EU | Ex II (2) GD | | | |
| certificate of suitability according to ATEX directive 2014/34/EU | DMT 98 ATEX G 001 | | | |
| reference code acc. to IEC 81346-2 | F | | | |
| Substance Prohibitance (Date) | 01.10.2009 00:00:00 | | | |
| Ambient conditions | | | | |
| installation altitude at height above sea level maximum | 2 000 m | | | |
| ambient temperature | | | | |
| during operation | -40 +70 °C | | | |
| during storage | -55 +80 °C | | | |
| during transport | -55 +80 °C | | | |
| temperature compensation | -40 +60 °C | | | |
| relative humidity during operation | 10 95 % | | | |
| Main circuit | | | | |
| number of poles for main current circuit | 3 | | | |
| adjustable current response value current of the current-dependent overload release | 2.8 4 A | | | |
| operating voltage | | | | |
| rated value | 690 V | | | |
| • at AC-3 rated value maximum | 690 V | | | |
| operating frequency rated value | 50 60 Hz | | | |

| operational current rated value | 4 A | | | |
|---|---|--|--|--|
| operating power at AC-3 | | | | |
| at 400 V rated value | 1.5 kW | | | |
| at 500 V rated value | 2.2 kW | | | |
| at 690 V rated value | 3 kW | | | |
| Auxiliary circuit | 5 KW | | | |
| design of the auxiliary switch | integrated | | | |
| number of NC contacts for auxiliary contacts | integrated | | | |
| note | for contactor disconnection | | | |
| number of NO contacts for auxiliary contacts | | | | |
| note | for message "Tripped" | | | |
| number of CO contacts for auxiliary contacts | 0 | | | |
| operational current of auxiliary contacts at AC-15 | 0 | | | |
| • at 24 V | 3 A | | | |
| • at 110 V | 3 A | | | |
| • at 120 V | 3 A | | | |
| • at 125 V | 3 A | | | |
| • at 230 V | 2 A | | | |
| • at 200 V | 1A | | | |
| operational current of auxiliary contacts at DC-13 | | | | |
| • at 24 V | 2 A | | | |
| • at 60 V | 0.3 A | | | |
| • at 110 V | 0.22 A | | | |
| • at 125 V | 0.22 A | | | |
| • at 220 V | 0.11 A | | | |
| contact rating of auxiliary contacts according to UL | B600 / R300 | | | |
| Protective and monitoring functions | 2000 / 1000 | | | |
| trip class | CLASS 10 | | | |
| design of the overload release | thermal | | | |
| UL/CSA ratings | ucina | | | |
| full-load current (FLA) for 3-phase AC motor | | | | |
| | | | | |
| | ٨Δ | | | |
| • at 480 V rated value | 4 A 4 A | | | |
| at 480 V rated valueat 600 V rated value | 4 A 4 A | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection | | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link | 4 A | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection | | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link o for short-circuit protection of the auxiliary switch required | 4 A | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link ofor short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions | 4 A | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position | 4 A fuse gG: 6 A, quick: 10 A any | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link ofor short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method | 4 A fuse gG: 6 A, quick: 10 A | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link ofor short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link ofor short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link ofor short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link ofor short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm | | | |
| at 480 V rated value | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm Ring cable lug connection | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit arrangement of electrical connectors for main current circuit | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No Ring cable lug connection ring cable connection | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring cable connection Top and bottom | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque for main contacts for ring cable lug | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque for main contacts for ring cable lug for auxiliary contacts for ring cable lug | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque for auxiliary contacts for ring cable lug outer diameter of the usable ring cable lug maximum | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m 7.5 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque for auxiliary contacts for ring cable lug outer diameter of the usable ring cable lug maximum design of screwdriver shaft | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque for auxiliary contacts for ring cable lug outer diameter of the usable ring cable lug maximum design of screwdriver shaft size of the screwdriver tip | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m 7.5 mm | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque for auxiliary contacts for ring cable lug outer diameter of the usable ring cable lug maximum design of screwdriver tip design of the thread of the connection screw | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm Pozidriv PZ 2 | | | |
| at 480 V rated value at 600 V rated value Short-circuit protection design of the fuse link for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection for main current circuit for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque for auxiliary contacts for ring cable lug outer diameter of the usable ring cable lug maximum design of screwdriver shaft size of the screwdriver tip | 4 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm | | | |

| Safety related data | | | | | | | |
|--|--|--------------------------------------|-----------------|---------------------|--------------------------------|----------------------------|--|
| failure rate [FIT] with low demand rate acc. to SN 31920 | | | 50 FIT | 50 FIT | | | |
| MTTF with high demand rate | | 2 280 y | 2 280 y | | | | |
| T1 value for proof test interval or service life acc. to IEC 61508 | | 20 y | | | | | |
| protection class IP on the front acc. to IEC 60529 | | | IP00 | | | | |
| Display | | | | | | | |
| display version for switching status | | | Slide sw | vitch | | | |
| Certificates/ approvals | | | | | | | |
| General Product Approval | | | | | For use in hazardous locations | | |
| SP SM | CCC | | | EHC | K ATEX | IECEx | |
| Declaration of Conformity | Test Certificates | | N | Marine / Shipping | | | |
| CE EG-Konf. | <u>Type Test Certific-</u> ates/Test Report | <u>Special Test Ce</u> <u>ate</u> | <u>ertific-</u> | ABS | B UREAU VERITAS | Lloyd's Register uis | |
| Marine / Shipping | | | | | other | Railway | |
| PRS | RINA | | | DNV-GL ENVILCOMM | <u>Confirmation</u> | Vibration and Shock | |
| Further information Information- and Do | wnloadcenter (Catalo | ogs, Brochures,. |) | | | | |

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-1EJ0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-1EJ0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1EJ0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2126-1EJ0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1EJ0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-1EJ0&objecttype=14&gridview=view1

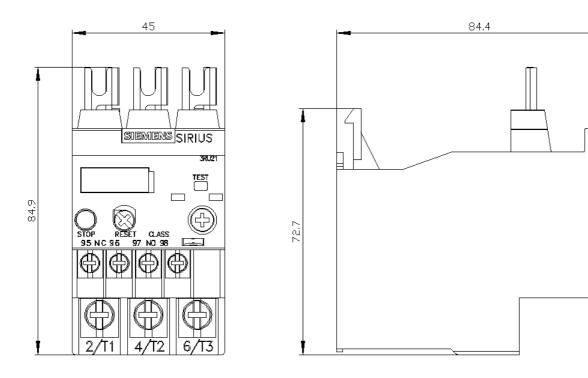

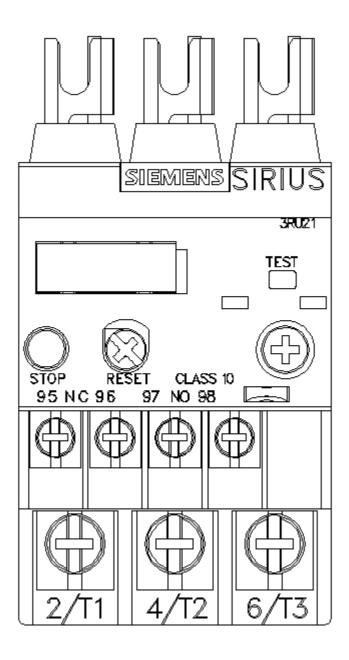

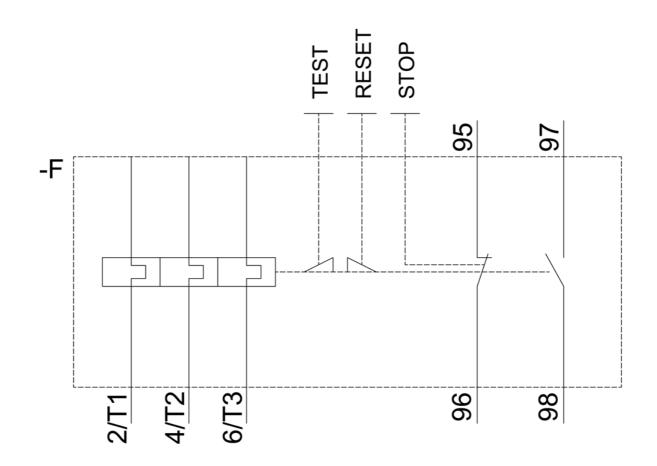

last modified:

1/18/2021 🖸