## SIEMENS

## Data sheet

## 3RU2126-1GJ0



Overload relay 4.5...6.3 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Ring cable lug Auxiliary circuit: ring cable lug Manual-Automatic-Reset

product brand name	SIRIUS			
product designation	thermal overload relay			
product type designation	3RU2			
General technical data	0102			
size of overload relay	S0			
size of contactor can be combined company-specific	SO			
power loss [W] for rated value of the current at AC in hot	6.6 W			
operating state				
• per pole	2.2 W			
insulation voltage with degree of pollution 3 at AC rated value	690 V			
surge voltage resistance rated value	6 kV			
maximum permissible voltage for safe isolation in networks with grounded star point				
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V			
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V			
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V			
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V			
shock resistance acc. to IEC 60068-2-27	8g / 11 ms			
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD			
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001			
reference code acc. to IEC 81346-2	F			
Substance Prohibitance (Date)	01.10.2009 00:00:00			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
<ul> <li>during operation</li> </ul>	-40 +70 °C			
<ul> <li>during storage</li> </ul>	-55 +80 °C			
during transport	-55 +80 °C			
temperature compensation	-40 +60 °C			
relative humidity during operation	10 95 %			
Main circuit				
number of poles for main current circuit	3			
adjustable current response value current of the current-dependent overload release	4.5 6.3 A			
operating voltage				
<ul> <li>rated value</li> </ul>	690 V			
• at AC-3 rated value maximum	690 V			
operating frequency rated value	50 60 Hz			

operational current rated value	6.3 A
operating power at AC-3	0.0 A
at 400 V rated value	2.2 kW
at 500 V rated value	3 kW
at 690 V rated value	4 kW
Auxiliary circuit	4 KVV
	integrated
design of the auxiliary switch number of NC contacts for auxiliary contacts	integrated 1
-	
note	for contactor disconnection 1
number of NO contacts for auxiliary contacts <ul> <li>note</li> </ul>	
	for message "Tripped" 0
number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15	0
• at 24 V	3 A
• at 24 v	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 200 V	2 A 1 A
operational current of auxiliary contacts at DC-13 • at 24 V	2 A
• at 24 v • at 60 V	2 A 0.3 A
• at 110 V	0.3 A 0.22 A
• at 125 V	0.22 A
• at 220 V	0.22 A 0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
	B000 / K300
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	6.3 A
• at 400 v Tateu value	0.5 A
	C 2 A
• at 600 V rated value	6.3 A
Short-circuit protection	6.3 A
Short-circuit protection design of the fuse link	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch	6.3 A fuse gG: 6 A, quick: 10 A
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	fuse gG: 6 A, quick: 10 A
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	fuse gG: 6 A, quick: 10 A any
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method	fuse gG: 6 A, quick: 10 A
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	fuse gG: 6 A, quick: 10 A any Contactor mounting
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No Ring cable lug connection
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring cable connection
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No Ring cable lug connection ring cable connection Top and bottom
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug	fuse gG: 6 A, quick: 10 A         any         Contactor mounting         85 mm         45 mm         85 mm         No         Ring cable lug connection         ring cable connection         Top and bottom         2.5 2 N·m         0.8 1.2 N·m
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m 7.5 mm
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug	fuse gG: 6 A, quick: 10 A         any         Contactor mounting         85 mm         45 mm         85 mm         85 mm         No         No         Ring cable lug connection         ring cable connection         Top and bottom         2.5 2 N·m         0.8 1.2 N·m         7.5 mm         Diameter 5 6 mm
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for screwdriver shaft         size of the screwdriver tip	fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm 85 mm No No Ring cable lug connection ring cable connection Top and bottom 2.5 2 N·m 0.8 1.2 N·m 7.5 mm
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for screwdriver shaft         size of the screwdriver tip         design of the thread of the connection screw	fuse gG: 6 A, quick: 10 A         any         Contactor mounting         85 mm         45 mm         85 mm         No         Ring cable lug connection         ring cable connection         Top and bottom         2.5 2 N·m         0.8 1.2 N·m         7.5 mm         Diameter 5 6 mm         Pozidriv PZ 2
Short-circuit protection         design of the fuse link         • for short-circuit protection of the auxiliary switch required         Installation/ mounting/ dimensions         mounting position         fastening method         height         width         depth         Connections/ Terminals         product component removable terminal for auxiliary and control circuit         type of electrical connection         • for main current circuit         • for auxiliary and control circuit         arrangement of electrical connectors for main current circuit         tightening torque         • for main contacts for ring cable lug         • for auxiliary contacts for ring cable lug         • for screwdriver shaft         size of the screwdriver tip	fuse gG: 6 A, quick: 10 A         any         Contactor mounting         85 mm         45 mm         85 mm         85 mm         No         No         Ring cable lug connection         ring cable connection         Top and bottom         2.5 2 N·m         0.8 1.2 N·m         7.5 mm         Diameter 5 6 mm

Safety related data								
failure rate [FIT] with low demand rate acc. to SN 31920			50 FI	Т				
MTTF with high demand rate		2 280	) у					
T1 value for proof test interval or service life acc. to IEC 61508		20 y						
protection class IP on the front acc. to IEC 60529			IP00					
Display								
display version for switching status			Slide	switch				
Certificates/ approvals								
General Product Approval					For use in hazardous locations			
	CCC	UL ut		EHC	K ATEX	IECEx		
Declaration of Conformity	Test Certificates			Marine / Shipping				
CE EG-Konf.	<u>Type Test Certific-</u> ates/Test Report	<u>Special Test Ce</u> ate	<u>ertific-</u>	ABS	B U R E A U VERITAS	Lloyd's Register Uis		
Marine / Shipping					other	Railway		
PRS	RINA	KMRS		DNV-GL	<u>Confirmation</u>	Vibration and Shock		
Further information Information- and Do https://www.siemens.	wnloadcenter (Catalc com/ic10	ogs, Brochures,.	)					

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-1GJ0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-1GJ0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1GJ0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2126-1GJ0&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-1GJ0/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-1GJ0&objecttype=14&gridview=view1

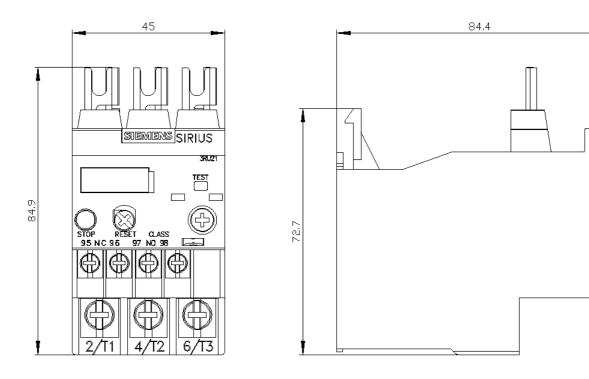

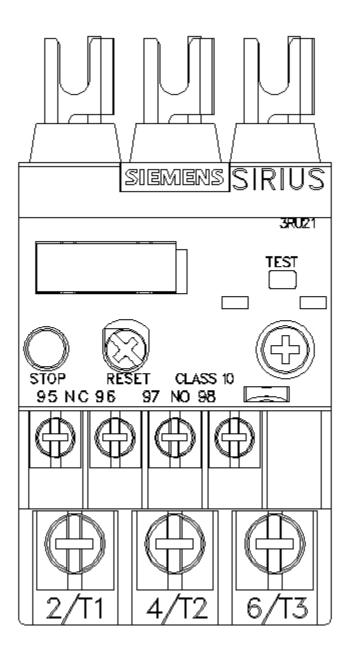

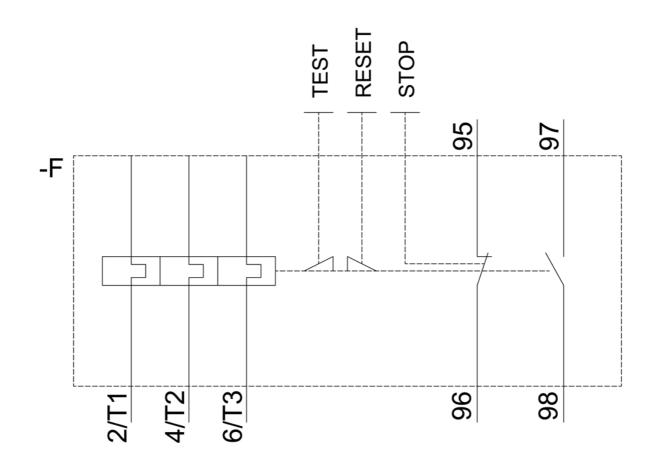

last modified:

1/18/2021 🖸