## **SIEMENS**

Data sheet 3RF3410-1BD24



Solid-state contactor 3-phase 3RF3 AC 53 / 7.4 A / 40  $^{\circ}\text{C}$  48-480 V / 110-230 V AC Reversing circuit Instantaneous switching screw terminal

product brand name	SIRIUS
product designation	solid-state reversing contactor
design of the product	two-phase controlled
product type designation	3RF34
manufacturer's article number	
<ul> <li>_1 of the accessories that can be ordered</li> </ul>	3RA2921-1BA00
<ul><li>_2 of the accessories that can be ordered</li></ul>	3RF3900-0QA88
product designation	
<ul><li>_1 of the accessories that can be ordered</li></ul>	Link module
<ul> <li>_2 of the accessories that can be ordered</li> </ul>	Connection adapter
General technical data	
product function	instantaneous switching
power loss [W] for rated value of the current at AC in hot operating state	13 W
• per pole	4.33 W
power loss [W] for rated value of the current without load current share typical	3.5 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	AC
surge voltage resistance of main circuit rated value	6 kV
shock resistance acc. to IEC 60068-2-27	15g / 11 ms
vibration resistance acc. to IEC 60068-2-6	2g
certificate of suitability	CE / UL / CSA / CCC / C-Tick (RCM)
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	28.05.2009 00:00:00
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	2
number of NC contacts for main contacts	0
operating voltage at AC	
• at 50 Hz rated value	48 480 V
at 60 Hz rated value	48 480 V
operating frequency rated value	50 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
● at 50 Hz	40 506 V
● at 60 Hz	40 506 V
operational current	
• at AC-3 at 400 V rated value	7.4 A

	7.4
<ul> <li>at AC-53a at 400 V at ambient temperature 40 °C rated value</li> </ul>	7.4 A
operational current minimum	500 mA
operating power	
at AC-3 at 400 V rated value	3 kW
rate of voltage rise at the thyristor for main contacts	1 000 V/µs
maximum permissible	
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I2t value maximum	1 800 A <sup>2</sup> ·s
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
● at 50 Hz	110 230 V
● at 60 Hz	110 230 V
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
relative symmetrical tolerance of the control supply	10 %
voltage frequency	
control supply voltage at AC	
<ul> <li>at 50 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	40 V
at 60 Hz full-scale value for signal<0> recognition	40 V
control supply voltage	
at AC initial value for signal <1> detection	90 V
symmetrical line frequency tolerance	5 Hz
operating range factor control supply voltage rated value at AC at 50 Hz	
initial value	0.82
full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
initial value	0.82
full-scale value	1.1
control current at minimum control supply voltage	
• at AC	2 mA
control current at AC rated value	15 mA
ON-delay time	20 ms
OFF-delay time	10 ms; additionally max. one half-wave
switchover delay of reversing contactor	50 100 ms
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
mounting position	vertical
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
side-by-side mounting	Yes
height	95 mm
width	90 mm
depth	113.8 mm
required spacing with side-by-side mounting	
• upwards	70 mm
<ul><li>downwards</li></ul>	50 mm
Connections/ Terminals	
product component removable terminal for auxiliary and	Yes
control circuit	
type of electrical connection	

• for auxiliary and control circuit      type of connectable conductor cross-sections         • for main contacts             — solid             — finely stranded with core end processing             • at AWG cables for main contacts             • solid or stranded             • finely stranded with core end processing             • solid or stranded             • finely stranded with core end processing             • for auxiliary and control contacts              — solid             — finely stranded with core end processing             • for auxiliary and control contacts              — solid             — finely stranded with core end processing             — finely stranded with core end processing             — finely stranded without core end processing             — at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]  • for main contacts with screw-type terminals  18 22 lbf-in
• for main contacts
- solid - finely stranded with core end processing • at AWG cables for main contacts  • solid or stranded • finely stranded with core end processing • for auxiliary and control contacts  • at AWG cables for main contacts  • solid or stranded • finely stranded with core end processing • for auxiliary and control contacts  - solid - finely stranded with core end processing • at AWG cables for auxiliary and control contacts  • at AWG cables for auxiliary and control contacts  - solid - finely stranded with core end processing - finely stranded without core end processing - at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]
<ul> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> <li>connectable conductor cross-section for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>for auxiliary and control contacts</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> <li>finely stranded without core end processing</li> <li>at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross section for main contacts</li> <li>tightening torque</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>tightening torque [lbf-in]</li> </ul>
<ul> <li>at AWG cables for main contacts</li> <li>connectable conductor cross-section for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>for auxiliary and control contacts</li> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded with core end processing</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> <li>— finely stranded without core end processing</li> <li>— at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross section for main contacts</li> <li>tightening torque</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>tightening torque [lbf-in]</li> </ul>
<ul> <li>at AWG cables for main contacts</li> <li>connectable conductor cross-section for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>for auxiliary and control contacts</li> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded with core end processing</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> <li>— finely stranded without core end processing</li> <li>— at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross section for main contacts</li> <li>tightening torque</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>tightening torque [lbf-in]</li> </ul>
connectable conductor cross-section for main contacts  • solid or stranded • finely stranded with core end processing  • for auxiliary and control contacts  — solid — finely stranded with core end processing — finely stranded with core end processing — finely stranded with core end processing — finely stranded without core end processing — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for auxiliary and control contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals
• finely stranded with core end processing  type of connectable conductor cross-sections  • for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]  1 10 mm²  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  1x (AWG 20 12)  14 10  2 2.5 N⋅m  0.5 0.6 N⋅m
type of connectable conductor cross-sections  • for auxiliary and control contacts  — solid  — finely stranded with core end processing — finely stranded without core end processing  • at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for auxiliary and control contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf-in]  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)  1x (0.5 2.5 mm²),
<ul> <li>for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  — finely stranded without core end processing  — at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  for auxiliary and control contacts with screw-type terminals  for auxiliary and control contacts with screw-type terminals  fightening torque [lbf·in]  for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]</li> </ul>
<ul> <li>for auxiliary and control contacts  — solid  — finely stranded with core end processing  — finely stranded without core end processing  — finely stranded without core end processing  — at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque  for auxiliary and control contacts with screw-type terminals  for auxiliary and control contacts with screw-type terminals  fightening torque [lbf·in]  for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]</li> </ul>
- solid - finely stranded with core end processing - finely stranded without core end processing - finely stranded without core end processing - at AWG cables for auxiliary and control contacts  AWG number as coded connectable conductor cross section for main contacts  tightening torque - for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]  1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5
<ul> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> <li>— at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross section for main contacts</li> <li>itightening torque</li> <li>● for main contacts with screw-type terminals</li> <li>■ for auxiliary and control contacts with screw-type terminals</li> <li>Itightening torque [lbf·in]</li> <li>1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)</li> <li>1x (AWG 20 12)</li> <li>14 10</li> <li>2 2.5 N·m</li> <li>0.5 0.6 N·m</li> </ul>
<ul> <li>— finely stranded without core end processing <ul> <li>at AWG cables for auxiliary and control contacts</li> <li>AWG number as coded connectable conductor cross section for main contacts</li> <li>tightening torque <ul> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>tightening torque [lbf·in]</li> </ul> </li> <li>1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) <ul> <li>1x (AWG 20 12)</li> </ul> </li> <li>14 10</li> </ul> </li> <li>2 2.5 N⋅m <ul> <li>0.5 0.6 N⋅m</li> </ul> </li> <li>tightening torque [lbf·in]</li> </ul>
<ul> <li>at AWG cables for auxiliary and control contacts         AWG number as coded connectable conductor cross section for main contacts         tightening torque         of or main contacts with screw-type terminals         of or auxiliary and control contacts with screw-type terminals         tightening torque [lbf·in]</li> <li>1x (AWG 20 12)         14 10         </li> <li>2 2.5 N·m         0.5 0.6 N·m         10 N·m</li></ul>
AWG number as coded connectable conductor cross section for main contacts  tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]
tightening torque  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]  tightening torque [lbf·in]
<ul> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>10.5 0.6 N⋅m</li> <li>10.5 0.6 N⋅m</li> </ul>
• for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]
terminals tightening torque [lbf-in]
• for main contacts with screw-type terminals     18 22 lbf⋅in
<ul> <li>• for auxiliary and control contacts with screw-type terminals</li> <li>7.5 5.3 lbf⋅in</li> </ul>
design of the thread of the connection screw
• for main contacts M4
• of the auxiliary and control contacts  M3
stripped length of the cable
• for main contacts 10 mm
• for auxiliary and control contacts 7 mm
UL/CSA ratings
full-load current (FLA) for 3-phase AC motor
• at 480 V rated value 4.8 A
yielded mechanical performance [hp] for 3-phase AC motor
• at 200/208 V rated value 1.5 hp
• at 220/230 V rated value 2 hp
• at 460/480 V rated value 3 hp
Safety related data
proportion of dangerous failures with high demand rate acc. to SN 31920
MTTF with high demand rate 39 y  T1 value for proof test interval or service life acc. to 6 y
IEC 61508
protection class IP on the front acc. to IEC 60529 IP20
touch protection on the front acc. to IEC 60529 finger-safe, for vertical contact from the front
Ambient conditions
installation altitude at height above sea level maximum 1 000 m
ambient temperature
• during operation -25 +60 °C
• during storage -55 +80 °C
Electromagnetic compatibility
conducted interference
<ul> <li>due to burst acc. to IEC 61000-4-4</li> <li>2 kV / 5 kHz behavior criterion 2</li> </ul>
• due to conductor-earth surge acc. to IEC 61000-4-5 2 kV behavior criterion 2
<ul> <li>due to conductor-conductor surge acc. to IEC</li> <li>61000-4-5</li> <li>1 kV behavior criterion 2</li> </ul>
• due to high-frequency radiation acc. to IEC 61000- 4-6

electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions acc. to CISPR11	Class A for industrial environment
field-bound HF interference emission acc. to CISPR11	Class A for industrial environment
Short-circuit protection, design of the fuse link	
manufacturer's article number	
<ul> <li>of full range R fuse link for semiconductor protection at NH design usable</li> </ul>	<u>3NE1802-0</u>
<ul> <li>of full range R fuse link for semiconductor protection at cylindrical design usable</li> </ul>	<u>5SE1335</u>
<ul> <li>of back-up R fuse link for semiconductor protection at NH design usable</li> </ul>	<u>3NE8020-1</u>
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable</li> </ul>	3NC1032
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li> </ul>	<u>3NC1450</u>
<ul> <li>of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li> </ul>	3NC2263
manufacturer's article number of the gG fuse	
at NH design usable	3NA3805-6
manufacturer's article number	
<ul> <li>of DIAZED fuse usable</li> </ul>	<u>5SB311</u>
Certificates/ approvals	

Certificates/ approvals

## **General Product Approval**

**EMC** 

**Declaration of Conformity** 













**Test Certificates** 

other

Type Test Certificates/Test Report

Confirmation

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF3410-1BD24


Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RF3410-1BD24}$ 


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RF3410-1BD24


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RF3410-1BD24&lang=en







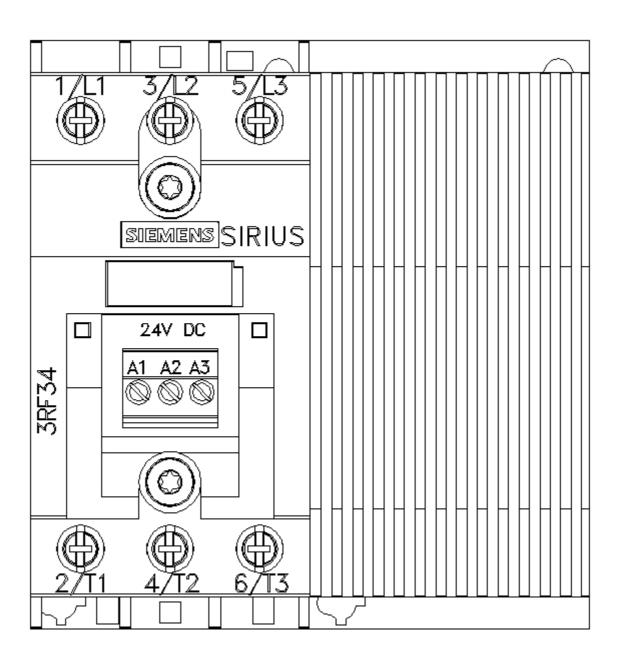

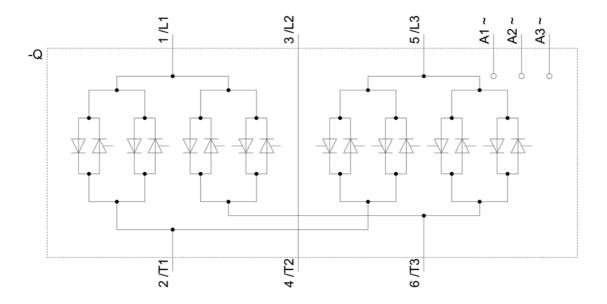

last modified: 3/11/2021 🖸