SIEMENS

Data sheet

3RW4037-1BB04



SIRIUS soft starter S2 63 A, 30 kW/400 V, 40 $^\circ\text{C}$ 200-480 V AC, 24 V AC/DC Screw terminals

General technical data		
product brand name		SIRIUS
product feature		
 integrated bypass contact system 		Yes
thyristors		Yes
product function		
 intrinsic device protection 		Yes
 motor overload protection 		Yes
 evaluation of thermistor motor protection 		No
external reset		Yes
 adjustable current limitation 		Yes
inside-delta circuit		No
product component motor brake output		No
insulation voltage rated value	V	600
degree of pollution		3, acc. to IEC 60947-4-2
reference code acc. to DIN EN 61346-2		Q
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G
Power Electronics		
product designation		Soft starter
operational current		
• at 40 °C rated value	А	63
• at 50 °C rated value	А	58
• at 60 °C rated value	А	53
yielded mechanical performance for 3-phase motors		
• at 230 V		
— at standard circuit at 40 °C rated value	W	18 500
• at 400 V		
— at standard circuit at 40 °C rated value	W	30 000
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	15
operating frequency rated value	Hz	50 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	200 480
relative negative tolerance of the operating voltage at standard circuit	%	-15
relative positive tolerance of the operating voltage at standard circuit	%	10
minimum load [%]	%	20

adjustable motor current for motor overload protection minimum rated value	A	26
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during operation typical	VV	12
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply voltage frequency	%	-10
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC		
 at 50 Hz rated value 	V	24
 at 60 Hz rated value 	V	24
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	20
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-20
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	20
control supply voltage 1 at DC rated value	V	24
relative negative tolerance of the control supply voltage at DC	%	-20
relative positive tolerance of the control supply voltage at DC	%	20
display version for fault signal		red
Mechanical data		
size of engine control device	_	S2
width	mm	55
height	mm	160
depth	mm	170
fastening method	_	screw and snap-on mounting
mounting position		With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
required spacing with side-by-side mounting		
• upwards	mm	60
• at the side	mm	30
downwards	mm	40
wire length maximum	m	300
number of poles for main current circuit		3
Connections/ Terminals		
type of electrical connection		
for main current circuit		screw-type terminals
 for auxiliary and control circuit 		screw-type terminals
number of NC contacts for auxiliary contacts		0
number of NO contacts for auxiliary contacts		2
number of CO contacts for auxiliary contacts		1
type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point • solid • finely stranded with core end processing		2x (1.5 16 mm²) 0.75 25 mm²
stranded		0.75 35 mm ²
type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point • solid		2x (1.5 16 mm ²)
- Juliu		

 finely stranded 	d with core end processing	g		1.5 25 mm ²	2	
 stranded 				1.5 35 mm ²	2	
	e conductor cross-secti box terminal using both					
• solid				2x (1.5 16 i	mm²)	
	d with core end processing	a		2x (1.5 16)	,	
 stranded 		9		2x (1.5 25)		
type of connectable	e conductor cross-secti ntacts for box terminal	ons at AWG		28 (1.0 201	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
 using the back 	< clamping point			16 2		
 using the front 	t clamping point			18 2		
 using both cla 				2x (16 2)		
type of connectabl auxiliary contacts	e conductor cross-secti	ons for				
 solid 				2x (0.5 2.5	mm²)	
 finely stranded 	d with core end processing	g		2x (0.5 1.5	mm²)	
cables	e conductor cross-secti	ons at AWG				
 for auxiliary co 	ontacts			2x (20 14)		
processing	ontacts finely stranded wit	h core end		2x (20 16)		
Ambient conditions						
	e at height above sea lev	/el	m	5 000		
environmental cate	egory					
	ort acc. to IEC 60721				1, 2M2 (max. fall heigh	,
 during storage 	e acc. to IEC 60721				asional condensation)	
• during operation	on acc. to IEC 60721			3K6 (no forma	ust not get inside the d ation of ice, no conden and must not get into th	sation), 3C3 (no salt
ambient temperatu	re				-	
 during operation 			°C	-25 +60		
 during storage 			°C	-40 +80		
derating temperatu			°C	40		
	on the front acc. to IEC	60529		IP20		
	n the front acc. to IEC 6			finger-safe, fo	r vertical contact from	the front
Certificates/ approva				<u> </u>		
			_			
General Product A	pproval				EMC	For use in hazard- ous locations
S.		(h)		EHC	RCM	K ATEX
Declaration of Conformity	Test Certificates		Mari	ne / Shipping		
CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific</u> ates/Test Report		Lloyd's Register uis	PRS	DNV-GL DNV-GL
other	Railway					
outor	Kanway					
<u>Confirmation</u>	Vibration and Shock	Confirmation				

hp	20
hp	40
	B300 / R300

Further information

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4037-1BB04


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4037-1BB04


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW4037-1BB04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4037-1BB04&lang=en

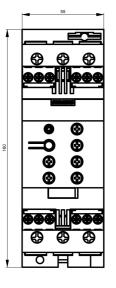

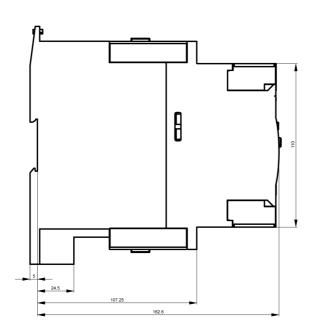

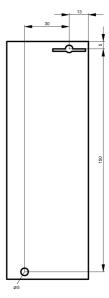

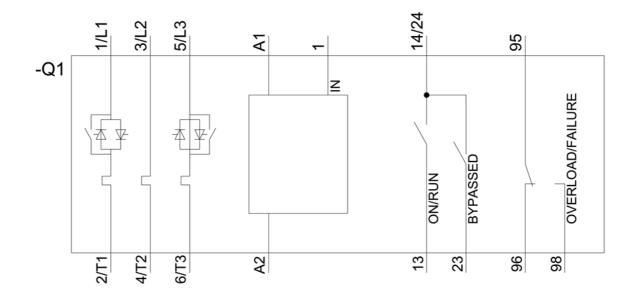

last modified:

12/15/2020 🖸