



Figure similar

MLFB-Ordering data

6SL3210-5BE21-5UV0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data

Input

Number of phases	3 AC
Line voltage	380 ... 480 V -15 % +10 %
Line frequency	47 ... 63 Hz

Output

Number of phases	3 AC
Rated voltage	400 V
Rated power (HO)	1.50 kW / 2.00 hp
Rated power (LO)	1.50 kW / 2.00 hp
Rated current (HO)	4.10 A
Rated current (LO)	4.10 A
Rated current (HO) at 480V	4.10 A
Rated current (LO) at 480V	4.10 A
Pulse frequency	4.00 kHz
Output frequency	0 ... 550 Hz

General tech. specifications

Power factor λ	0.72
Offset factor $\cos \varphi$	0.95
Efficiency η	0.98
Filter class (integrated)	Unfiltered

Ambient conditions

Cooling	External fan
Installation altitude	1000 m (3281 ft)
Ambient temperature	
Operation	-10 ... 60 °C (14 ... 140 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

Relative humidity

Max. operation	95 %
----------------	------

Communication

Communication	USS, Modbus RTU
---------------	-----------------

Standards

Compliance with standards	CE, cULus, C-Tick (RCM), KC
CE marking	EN 61800-5-1 / EN 60204-1 and EN 61800-3

Overload capability

Low Overload (LO)

110 % rated output current for 60 s, cycle time 300 s

High Overload (HO)

150 % rated output current for 60 s, cycle time 300 s



Figure similar

Mechanical data

Mounting position	Wall mounting / side-by-side mounting
Degree of protection	IP20 / UL open type
Size	FSA
Net weight	1.00 kg (2.20 lb)
Width	90.0 mm (3.54 in)
Height	166.0 mm (6.54 in)
Depth	145.5 mm (5.73 in)

Inputs / outputs

Standard digital inputs

Number	4
--------	---

Digital outputs

Number as relay changeover contact	1
Number as transistor	1

Analog inputs

Number	2 (Can be used as additional digital input)
--------	---

Analog outputs

Number	1
--------	---


Connections

Max. motor cable length

Shielded	10 m (33 ft)
Unshielded	50 m (164 ft)

Converter losses to IEC61800-9-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	28.40 %

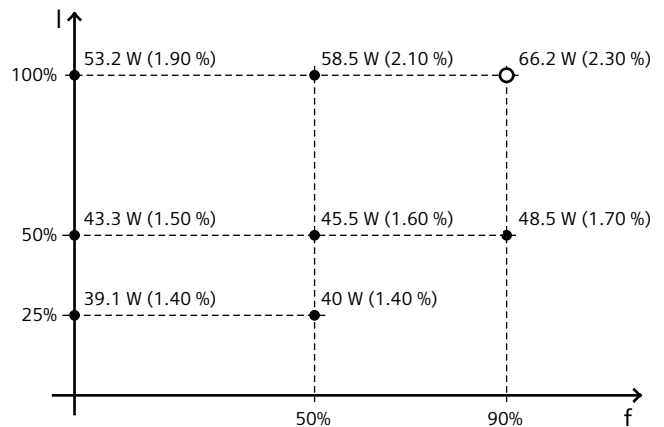

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values