SIEMENS

Data sheet 3RV2011-1DA20



Circuit breaker size S00 for motor protection, CLASS 10 A-release 2.2...3.2 A N release 42 A Spring-type terminal Standard switching capacity




product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For motor protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
at AC in hot operating state per pole	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
of auxiliary contacts typical	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Lead - 7439-92-1
Weight	0.367 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	74.698 kg
global warming potential [CO2 eq] during manufacturing	1.98 kg
global warming potential [CO2 eq] during sales	0.134 kg
global warming potential [CO2 eq] during operation	72.7 kg
global warming potential [CO2 eq] after end of life	-0.116 kg
Siemens Eco Profile (SEP)	Siemens EcoTech

Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	2.2 3.2 A
type of voltage for main current circuit	AC/DC
operating voltage	
• rated value	20 690 V
• at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	3.2 A
operational current	
at AC-3 at 400 V rated value	3.2 A
at AC-3e at 400 V rated value	3.2 A
operating power	
• at AC-3	
— at 230 V rated value	0.6 kW
— at 400 V rated value	1.1 kW
— at 500 V rated value	1.5 kW
— at 690 V rated value	2.2 kW
• at AC-3e	
— at 230 V rated value	0.6 kW
— at 400 V rated value	1.1 kW
— at 500 V rated value	1.5 kW
— at 690 V rated value	2.2 kW
operating frequency	E.E. (())
at AC-3 maximum	15 1/h
at AC-3 maximum at AC-3e maximum	15 1/h
Auxiliary circuit	13 1/11
	ACIDO
type of voltage for auxiliary and control circuit	AC/DC
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	N.
ground fault detection	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	
at AC at 240 V rated value	100 kA
at AC at 400 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 690 V rated value	10 kA
operating short-circuit current breaking capacity (lcs) at AC	
at 240 V rated value	100 kA
• at 400 V rated value	100 kA
at 500 V rated value	100 kA
at 690 V rated value	10 kA
response value current of instantaneous short-circuit trip unit	42 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
	3.2 A
• at 480 V rated value	
at 480 V rated valueat 600 V rated value	3.2 A
	3.2 A
• at 600 V rated value	3.2 A
at 600 V rated value yielded mechanical performance [hp]	3.2 A 0.1 hp
at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor	
at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor — at 110/120 V rated value	0.1 hp
at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor — at 110/120 V rated value — at 230 V rated value	0.1 hp

at 4504460 V rated value 2 pp Short-circuit protection design of the short-circuit trip design of the short-circuit trip at 400 V at 500 V at 500 V at 500 V at 600 V backling mounting dimensions mounting position fastening method screw and snap-on mounting onto 35 mm DIN rail according the legith width depth required spacing with side-by-side mounting at the side of orgounded parts at 400 V downwards upwards at the side of file word at 500 V downwards upwards at the side of orgounded parts at 500 V downwards upwards at the side of orgounded parts at 500 V downwards upwards at the side of orgounded parts at 500 V downwards upwards upwar	
Short-circuit protection product function short circuit protection design of the fuse link for IT network for short-circuit rotection of the main circuit • at 400 V • at 300 V • at 300 V • at 660 V g.UgG 25 A Installation mounting dimensions mounting position fastening method height width • 45 mm depth • or grounded parts at 400 V — downwards — at the side — or for live parts at 400 V — downwards — at the side • of or grounded parts at 500 V — downwards — at the side • of or live parts at 500 V — downwards — at the side • of or live parts at 400 V — downwards — at the side • of or grounded parts at 400 V — downwards — at the side • of or grounded parts at 500 V — downwards — at the side • of or live parts at 500 V — downwards — at the side • of or grounded parts at 500 V — downwards — at the side • of or grounded parts at 690 V — downwards — at the side • of or live parts at 500 V — downwards — at the side • of or live parts at 500 V — downwards — at the side • of or grounded parts at 690 V — downwards — at the side • of or grounded parts at 690 V — downwards — at the side • of or grounded parts at 690 V — downwards — at the side • for grounded parts at 690 V — downwards — at the side • for grounded parts at 690 V — downwards — boxdwards — on the side — forwards — on the side — forwards • of mm — orwards • of mm • for main current circuit propertical connections for main current circuit arrangement of electrical connectors for main current circuit arrangement of electrical connectors for main current circuit arrangement of all contactors • for main contacts • for main contacts • for main contacts • for main contacts • for main cortects for main contacts • for formal contacts • for formal cortects for main contacts	
product function short circuit protection design of the fuse link for IT network for short-circuit protection of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 50	
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	
design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V gl.yG 25 A gl.	
protection of the main circuit	
e at 400 V e 1 500 V s 1 500 V gL/gG 25 A graph and gL/gG 25 A gL	
• at 500 V	
e at 690 V gL/gG 25 A maturitation/ mounting/ dimensions mounting position fastening method height depth required spacing e with side-by-side mounting at the side for grounded parts at 400 V - downwards - upwards - at the side for grounded parts at 500 V - downwards - upwards - at the side for grounded parts at 500 V - downwards - upwards - at the side for grounded parts at 500 V - downwards - at the side for grounded parts at 500 V - downwards - upwards - at the side for grounded parts at 500 V - downwards - at the side for live parts at 500 V - downwards - at the side for live parts at 500 V - downwards - at the side for live parts at 500 V - downwards - at the side for for grounded parts at 690 V - downwards - at the side for for jounded parts at 500 V - downwards - at the side for for jounded parts at 500 V - downwards - backwards - upwards - backwards - upwards - backwards - backwards - backwards - onm - the side - for wards - backwards - onm - pwards - backwards - onm - upwards - backwards - onm -	
mounting position mounting position fastening method height width dopth 97 mm required spacing • with side-by-side mounting at the side of or grounded parts at 400 V — downwards — upwards — at the side of or grounded parts at 500 V — downwards — at the side of or grounded parts at 500 V — downwards — at the side of or grounded parts at 500 V — downwards — at the side of or grounded parts at 500 V — downwards — at the side of or grounded parts at 500 V — downwards — at the side of or grounded parts at 500 V — downwards — at the side of or grounded parts at 500 V — downwards — at the side of or live parts at 500 V — downwards — at the side of or live parts at 500 V — downwards — at the side of or grounded parts at 600 V — downwards — at the side of or grounded parts at 600 V — downwards — at the side of or grounded parts at 600 V — downwards — at the side of or grounded parts at 600 V — downwards — backwards — upwards — backwards — backwards — the side — for man — the side — for man — the side — for man — ownwards of or live parts at 600 V — downwards of or live parts at 600 V — downwards — backwards — on mm of or man — the side — for man — sping-loaded terminals type of electrical connection of or main current circuit rarrangement of electrical connectors for main current circuit type of connectable conductor cross-sections of or main current circuit rarrangement of electrical connectors for main current circuit type of connectable conductor cross-sections of or main current circuit rarrangement of electrical connectors for main current electrical connectable sor main current of main current circuit rarrangement of electrical connectors for main current of main current circuit rarrangement of electrical connectors for main current of main current circuit rarrangement of electrical connectors for main current of main current circuit rarrangement of electrical connectors for main current of main current circuit rarrangement of electrical connectors for main current of main current circuit of main cu	
mounting position fastering method screw and snap-on mounting onto 35 mm DIN rail according height 106 mm width 45 mm depth 97 mm required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards 30 mm — at the side 9 mm • for grounded parts at 400 V — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V — downwards 30 mm — at the side 9 mm • for live parts at 500 V — downwards 30 mm — at the side 9 mm • for inve parts at 500 V — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V — downwards 50 mm — backwards 0 mm • for live parts at 500 V — downwards 50 mm — backwards 0 mm — backwards 0 mm — the side 30 mm — forwards 0 mm — backwards 0 m	
Asstening method	
height 106 mm	ding to DIN EN 60715
width 45 mm depth 97 mm required spacing • with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — upwards — at the side • for grounded parts at 690 V — downwards — upwards — at the side • for live parts at 690 V — downwards — upwards — backwards — upwards — backwards — upwards — forwards • for live parts at 690 V — downwards — towards — upwards — forwards • for main carent circuit — towards — upwards — forwards — one main commonity — at the side — upwards — for one main current — represented to the conductor cross-sections • for main current circuit — forwards — solid or stranded — finely stranded with core end processing — finely stranded without core end processing — finely stranded without core end processing — for AWG cables for ma	aling to Dily Ely 607 15
Trequired spacing e with side-by-side mounting at the side 0 mm e for grounded parts at 400 V	
required spacing	
• with side-by-side mounting at the side • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 690 V — downwards — at the side • for grounded parts at 690 V — downwards — the side — forwards — the side — forwards • for live parts at 690 V — downwards — at the side — forwards • for live parts at 690 V — downwards — the side — forwards • for live parts at 690 V — downwards — the side — forwards • for man orman orman orman orman • for live parts at 690 V — downwards — the side — forwards — upwards — backwards — upwards — the side — forwards — o mm • for man orman orman orman orman • for man orman or	
• for grounded parts at 400 V — downwards — upwards — at the side 9 mm • for live parts at 400 V — downwards 30 mm — upwards — upwards — upwards — at the side 9 mm • for grounded parts at 500 V — downwards 30 mm — at the side 9 mm • for live parts at 500 V — downwards — at the side 9 mm • for live parts at 500 V — downwards 30 mm — at the side 9 mm • for live parts at 500 V — downwards — upwards — at the side 9 mm • for grounded parts at 690 V — downwards — backwards — upwards — at the side 9 mm • for live parts at 690 V — downwards — at the side — forwards • for live parts at 690 V — downwards — at the side — forwards • for live parts at 690 V — downwards — the side — forwards 0 mm • for live parts at 690 V — downwards 50 mm • for live parts at 690 V — downwards — upwards — upwards • for live parts at 690 V — downwards — o mm • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main cortacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing - for AWG cables for main contacts 2x (25 2.5 mm²) • for AWG cables for main contacts 2x (20 12)	
- downwards 30 mm 30 mm 40 mm	
- upwards - at the side • for live parts at 400 V - downwards - upwards - at the side • for grounded parts at 500 V - downwards - upwards - upwards - upwards - at the side • for live parts at 500 V - downwards - at the side • for live parts at 500 V - downwards - upwards - at the side • for live parts at 500 V - downwards - upwards - at the side • for grounded parts at 690 V - downwards - at the side • for grounded parts at 690 V - downwards - at the side • for grounded parts at 690 V - downwards - at the side - backwards - at the side - forwards • for live parts at 690 V - downwards • for live parts at 690 V - downwards - at the side - forwards • for live parts at 690 V - downwards - forwards • for live parts at 690 V - downwards - forwards • for live parts at 690 V - downwards - backwards - upwards - backwards - upwards - backwards - onm - the side - forwards - the side - formar contacts - solid or stranded - for main current circuit arrangement of electrical connections • for main current circuit arrangement of electrical connectors for main current circuit arrangement of slectrical connectors for main current circuit arrangement of slect	
■ at the side ■ for live parts at 400 V ■ downwards	
• for live parts at 400 V	
downwards upwards at the side for grounded parts at 500 V downwards upwards at the side or for live parts at 500 V downwards at the side for live parts at 500 V downwards upwards at the side for grounded parts at 500 V downwards upwards at the side for grounded parts at 690 V downwards upwards upwards backwards upwards at the side forwards at the side forwards for live parts at 690 V downwards backwards upwards for live parts at 690 V downwards for live parts at 690 V downwards for live parts at 690 V downwards backwards upwards backwards upwards for main current circuit forwards formands forwards formands forwards for at the side forwards forwards formands forwards forwards formands forwards formands forwards formands formands forwards formands forwards for main current circuit solid or stranded for at year forwarde with core end processing finely stranded with core end processing finely stranded without core end processing for AWG cables for main contacts x (20 12)	
- upwards - at the side 9 mm • for grounded parts at 500 V - downwards 30 mm - upwards 30 mm - upwards 30 mm - at the side 9 mm • for live parts at 500 V - downwards 30 mm - upwards 9 mm • for grounded parts at 500 V - downwards 9 mm • for grounded parts at 690 V - downwards 50 mm - upwards 9 mm • for grounded parts at 690 V - downwards 0 mm - backwards 0 mm - at the side 9 mm • for live parts at 690 V - downwards 50 mm - forwards • for live parts at 690 V - downwards • for live parts at 690 V - downwards • for live parts at 690 V - downwards • for live parts at 690 V - downwards 0 mm • for live parts at 690 V - downwards 0 mm - backwards - at the side - forwards	
- at the side 9 mm • for grounded parts at 500 V - downwards 30 mm - upwards 30 mm - at the side 9 mm • for live parts at 500 V - downwards 30 mm - upwards 30 mm - upwards 30 mm - upwards 9 mm • for grounded parts at 690 V - downwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - backwards 0 mm - at the side 30 mm • for live parts at 690 V - downwards 50 mm • for live parts at 690 V - downwards 50 mm • for wards 0 mm • for live parts at 690 V - downwards 50 mm - upwards 0 mm • for live parts at 690 V - downwards 50 mm - upwards 50 mm - upwards 0 mm - backwards 0 mm - backwards 0 mm - backwards 0 mm - tat the side 30 mm - backwards 0 mm - to main current circuit spring-loaded terminals type of electrical connection • for main current circuit spring-loaded terminals type of connectable conductor cross-sections • for main contacts - solid or stranded 2x (0,5 4 mm²) - finely stranded with core end processing 2x (0,5 2.5 mm²) - finely stranded without core end processing 2x (0,5 2.5 mm²) • for AWG cables for main contacts 2x (20 12)	
• for grounded parts at 500 V - downwards - upwards - at the side 9 mm • for live parts at 500 V - downwards 30 mm - upwards 9 mm • for live parts at 500 V - downwards 30 mm - upwards - upwards 9 mm • for grounded parts at 690 V - downwards - upwards - upwards - upwards - upwards - backwards - upwards - backwards 0 mm • for live parts at 690 V - downwards - at the side - forwards • for live parts at 690 V - downwards - at the side - forwards 0 mm • for live parts at 690 V - downwards - upwards - onm - forwards 0 mm - backwards - at the side - 30 mm - onm - forwards 0 mm - forwards - at the side - on mm - forwards - at the side - on mm - forwards - at the side - on mm - forwards - at the side - on mm - forwards - at the side - on mm - forwards - at the side - on mm - forwards - at the side - on mm - forwards - at the side - on mm - forwards - at the side - so mm - forwards - at the side - so mm - forwards - formain cornaction - for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing - for AWG cables for main contacts - for AWG cables for main contacts - solid or stranded - finely stranded without core end processing - for AWG cables for main contacts - 2x (0.5 2.5 mm²) - for AWG cables for main contacts	
downwards	
- upwards - at the side 9 mm • for live parts at 500 V - downwards 30 mm - upwards 9 mm • for grounded parts at 690 V - downwards 50 mm • backwards 0 mm - backwards 0 mm - forwards 0 mm • for live parts at 690 V - downwards 50 mm - backwards 0 mm - backwards 0 mm - forwards 0 mm • for live parts at 690 V - downwards 50 mm • for live parts at 690 V - downwards 0 mm • for live parts at 690 V - downwards 0 mm - backwards - at the side - forwards 0 mm - backwards - at the side - forwards 0 mm - sold mm - forwards 0 mm - the side - forwards 0 mm - sold or stranded - for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing - for AWG cables for main contacts 2x (20 12)	
- at the side 9 mm • for live parts at 500 V - downwards 30 mm - upwards 30 mm - at the side 9 mm • for grounded parts at 690 V - downwards 50 mm • for grounded parts at 690 V - downwards 50 mm - backwards 0 mm - at the side 30 mm - forwards 0 mm • for live parts at 690 V - downwards 50 mm • for live parts at 690 V - downwards 50 mm • for live parts at 690 V - downwards 50 mm - upwards 50 mm - upwards 50 mm - backwards 0 mm - backwards 0 mm - backwards 0 mm - browards 0 mm - at the side 30 mm - forwards 0 mm - at the side 30 mm - forwards Terminals type of electrical connection • for main current circuit spring-loaded terminals arrangement of electrical connectors for main current circuit spring-loaded terminals - solid or stranded 2x (0,5 4 mm²) - finely stranded with core end processing 2x (0,5 2.5 mm²) - finely stranded without core end processing 2x (0,5 2.5 mm²) • for AWG cables for main contacts 2x (20 12)	
• for live parts at 500 V - downwards - upwards - at the side • for grounded parts at 690 V - downwards - upwards - upwards - upwards - backwards - backwards - at the side - forwards - at the side - forwards - onm • for live parts at 690 V - downwards - upwards • for live parts at 690 V - downwards - upwards - upwards - backwards - upwards - backwards - upwards - backwards - onm - onm - at the side - onm - onm - onm - onm Connections/ Terminals type of electrical connectors • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing - for AWG cables for main contacts - sold or stranded without core end processing - finely stranded without core end processing - for AWG cables for main contacts - sold or STAMG cables for main contacts	
- downwards - upwards - at the side 9 mm ● for grounded parts at 690 V - downwards - upwards - upwards - upwards - upwards - backwards - the side - forwards - o mm - at the side - forwards - for live parts at 690 V - downwards - upwards - the side - forwards - upwards - upwards - upwards - upwards - backwards - upmards - backwards - o mm Connections/ Terminals type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing - for AWG cables for main contacts - 2x (0.5 2.5 mm²) - finely stranded without core end processing - for AWG cables for main contacts - 2x (0.5 2.5 mm²) - finely stranded without core end processing - for AWG cables for main contacts - 2x (0.5 2.5 mm²)	
- upwards - at the side 9 mm ● for grounded parts at 690 V - downwards 50 mm - upwards 50 mm - backwards 0 mm - at the side 30 mm ● for live parts at 690 V - downwards ● for live parts at 690 V - downwards 50 mm ● for live parts at 690 V - downwards 50 mm - upwards 50 mm - upwards 0 mm - at the side 30 mm - backwards 0 mm - backwards 0 mm - backwards 0 mm - backwards 0 mm - forwards - at the side 9 mm - forwards To pand bottom **Connections/Terminals** **Top and bottom **Top and bott	
- at the side • for grounded parts at 690 V - downwards - upwards - backwards - at the side - forwards • for live parts at 690 V - downwards • for live parts at 690 V - downwards • for live parts at 690 V - downwards - upwards - upwards - backwards - upwards - backwards - at the side - forwards - at the side - forwards - o mm - at the side - forwards - o mm - at the side - forwards - o mm Connections/ Terminals type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing - finely stranded without core end processing • for AWG cables for main contacts 2x (20 12)	
for grounded parts at 690 V — downwards — upwards — backwards — at the side — forwards — of main current circuit arrangement of electrical connectors — for main contacts — solid or stranded — for main contacts — for main contacts — for main contacts — forwards — forwards — of mm — solid or stranded — forwards	
- downwards 50 mm - upwards 50 mm - backwards 0 mm - at the side 30 mm - forwards 0 mm • for live parts at 690 V - downwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - upwards 50 mm - backwards 0 mm - backwards 0 mm - backwards 0 mm - forwards 0 mm - forwards 0 mm Connections/ Terminals type of electrical connection • for main current circuit spring-loaded terminals arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded 2x (0,5 4 mm²) - finely stranded with core end processing 2x (0.5 2.5 mm²) - finely stranded without core end processing 2x (0.5 2.5 mm²) • for AWG cables for main contacts 2x (20 12)	
— upwards 50 mm — backwards 0 mm — at the side 30 mm — forwards 0 mm • for live parts at 690 V — downwards 50 mm — upwards 50 mm — upwards 50 mm — backwards 0 mm — at the side 30 mm — at the side 30 mm — orwards 0 mm Connections/ Terminals type of electrical connection • for main current circuit spring-loaded terminals arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded 2x (0,5 4 mm²) — finely stranded with core end processing 2x (0.5 2.5 mm²) • for AWG cables for main contacts 2x (20 12)	
— backwards — at the side — forwards • for live parts at 690 V — downwards — upwards — backwards — backwards — backwards — of main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded without core end processing — for AWG cables for main contacts 0 mm 30 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0	
- at the side - forwards • for live parts at 690 V - downwards 50 mm • upwards 50 mm - backwards 0 mm - at the side 30 mm - at the side 7 forwards 0 mm - at the side 7 forwards 0 mm - forwards Terminals type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing - for AWG cables for main contacts • for AWG cables for main contacts 2 x (0.5 2.5 mm²) - for AWG cables for main contacts 2 x (20 12)	
- forwards • for live parts at 690 V - downwards - upwards - backwards - at the side - forwards 0 mm - forwards 0 mm - forwards 0 mm Connections/ Terminals type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing • for AWG cables for main contacts 2 x (0.5 2.5 mm²) - finely stranded without core end processing • for AWG cables for main contacts 2 x (20 12)	
 for live parts at 690 V — downwards — upwards — upwards — backwards — at the side — forwards — forwards — o mm — forwards — o mm — forwards — o mm — forwards — formains type of electrical connection — for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections — for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing — finely stranded without core end processing — for AWG cables for main contacts — solid or main contacts — finely stranded without core end processing — x (0.5 2.5 mm²) — finely stranded without core end processing — x (2x (0.5 2.5 mm²) — x (0.5 2.5 mm²) — x (0.5 2.5 mm²) — x (0.5 2.5 mm²)	
- downwards - upwards - backwards - backwards - at the side - forwards Connections/ Terminals type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing - for AWG cables for main contacts • for AWG cables for main contacts 2 to mm 50 mm 50 mm 50 mm 50 mm 70 pm 6 pm 70 pand bottom	
- upwards - backwards 0 mm - at the side 30 mm - forwards 0 mm Connections/ Terminals type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing • for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) - for AWG cables for main contacts 2x (20 12)	
- backwards - at the side - forwards Connections/ Terminals type of electrical connection	
- at the side - forwards 0 mm Connections/ Terminals type of electrical connection ● for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections ● for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing ● for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)	
— forwards Connections/ Terminals type of electrical connection • for main current circuit spring-loaded terminals arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)	
type of electrical connection • for main current circuit spring-loaded terminals Top and bottom type of connectable conductor cross-sections • for main contacts - solid or stranded - finely stranded with core end processing - finely stranded without core end processing - for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)	
type of electrical connection • for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts 2x (0.5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)	
 ◆ for main current circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections ◆ for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing — for AWG cables for main contacts 2x (0.5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 	
arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	
type of connectable conductor cross-sections • for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing of or AWG cables for main contacts type of connectable conductor cross-sections 2x (0,5 4 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²)	
 for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing — for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 	
 for main contacts — solid or stranded — finely stranded with core end processing — finely stranded without core end processing — for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 	
 — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 	
 — finely stranded with core end processing — finely stranded without core end processing • for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (0.5 2.5 mm²) 2x (20 12) 	
 — finely stranded without core end processing • for AWG cables for main contacts 2x (0.5 2.5 mm²) 2x (20 12) 	
• for AWG cables for main contacts 2x (20 12)	
design of screwdriver shaft Diameter 3 mm	
size of the screwdriver tip 3,0 x 0,5 mm	
Safety related data	
product function suitable for safety function Yes	

suitability for use	
safety-related switching on	No
safety-related switching OFF	Yes
service life maximum	10 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	50 %
B10 value with high demand rate according to SN 31920	5 000
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
T1 value	
 for proof test interval or service life according to IEC 61508 	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Handle
Approvals Certificates	











<u>KC</u>



General Product Approval

For use in hazardous locations

Test Certificates

Marine / Shipping

BIS CRS





Type Test Certificates/Test Report

Special Test Certificate



Marine / Shipping











Miscellaneous

other

other Railway

Confirmation



Confirmation

Special Test Certificate



Environment

Siemens EcoTech



Environment

Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1DA20

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-1DA20

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2011-1DA20&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1DA20/char


Further characteristics (e.g. electrical endurance, switching frequency)

earch&mlfb=3RV2011-1DA20&objecttype=14&gridview=view1

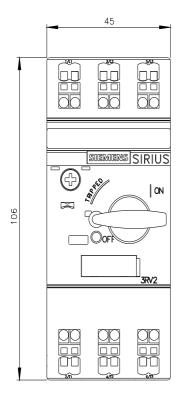

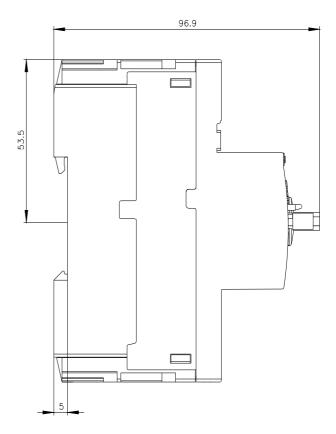

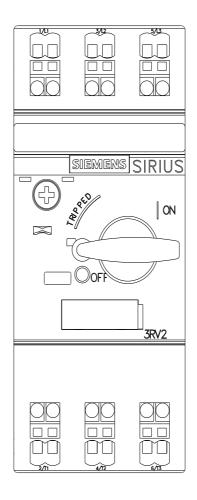

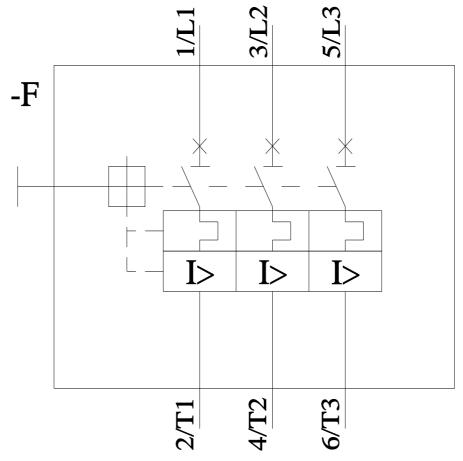

last modified: 5/2/2025 🖸