## SIEMENS

## Data sheet



SIRIUS soft starter Values at 400 V, 40 °C standard: 250 A, 132 kW Inside-delta: 433 A, 250 kW 200-460 V AC, 230 V AC Screw terminals !!! Phased-out product !!! Successor is SIRIUS 3RW5, Preferred successor type is >>3RW5544-6HA14<<

3RW4444-6BC44

General technical data		
product brand name		SIRIUS
product feature		
<ul> <li>integrated bypass contact system</li> </ul>		Yes
thyristors		Yes
product function		
<ul> <li>intrinsic device protection</li> </ul>		Yes
<ul> <li>motor overload protection</li> </ul>		Yes
<ul> <li>evaluation of thermistor motor protection</li> </ul>		Yes
external reset		Yes
<ul> <li>adjustable current limitation</li> </ul>		Yes
inside-delta circuit		Yes
product component motor brake output		Yes
insulation voltage rated value	V	690
degree of pollution		3, acc. to IEC 60947-4-2
reference code acc. to DIN EN 61346-2		Q
reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G
Power Electronics		
product designation		Soft starter
operational current		
<ul> <li>at 40 °C rated value</li> </ul>	А	250
<ul> <li>at 50 °C rated value</li> </ul>	А	215
<ul> <li>at 60 °C rated value</li> </ul>	А	185
operational current for 3-phase motors at inside-delta circuit		
<ul> <li>at 40 °C rated value</li> </ul>	А	433
• at 50 °C rated value	А	372
• at 60 °C rated value	А	320
yielded mechanical performance for 3-phase motors		
• at 230 V		
— at standard circuit at 40 °C rated value	W	75 000
— at inside-delta circuit at 40 °C rated value	W	132 000
• at 400 V		
— at standard circuit at 40 °C rated value	W	132 000
- at inside-delta circuit at 40 °C rated value	W	250 000
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	60
operating frequency rated value	Hz	50 60

	-	
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	200 460
relative negative tolerance of the operating voltage at standard circuit	%	-15
relative positive tolerance of the operating voltage at standard circuit	%	10
operating voltage at inside-delta circuit rated value	V	200 460
relative negative tolerance of the operating voltage at inside-delta circuit	%	-15
relative positive tolerance of the operating voltage at inside-delta circuit	%	10
minimum load [%]	%	8
adjustable motor current for motor overload protection minimum rated value	A	50
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during operation typical	W	110
Control circuit/ Control		
type of voltage of the control supply voltage		AC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply voltage frequency	%	-10
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC		
<ul> <li>at 50 Hz rated value</li> </ul>	V	230
<ul> <li>at 60 Hz rated value</li> </ul>	V	230
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-15
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	10
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-15
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
display version for fault signal		Display
Mechanical data		
width	mm	210
height	mm	230
depth	mm	298
fastening method	-	screw fixing
mounting position		with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
required spacing with side-by-side mounting		
• upwards	mm	100
• at the side	mm	5
downwards	mm	75
wire length maximum	m	500
number of poles for main current circuit		3
Connections/ Terminals		
type of electrical connection		
for main current circuit		busbar connection
<ul> <li>for auxiliary and control circuit</li> </ul>		screw-type terminals
number of NC contacts for auxiliary contacts		0
number of NO contacts for auxiliary contacts		3
number of CO contacts for auxiliary contacts		1
type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point		
<ul> <li>finely stranded with core end processing</li> </ul>		70 240 mm²

	70 240 mm <sup>2</sup>
	95 300 mm²
	120 185 mm²
	120 185 mm²
	120 240 mm²
	min. 2x 50 mm², max. 2x 185 mm²
	min. 2x 50 mm², max. 2x 185 mm²
	max. 2x 70 mm <sup>2</sup> , max. 2x 240 mm <sup>2</sup>
	250 500 kcmil
	3/0 600 kcmil
	min. 2x 2/0, max. 2x 500 kcmil
	50 240 mm <sup>2</sup>
	70 240 mm²
	2x (0.5 2.5 mm²)
	2x (0.5 1.5 mm²)
	2/0 500 kcmil
	2x (20 14)
	2x (20 16)
m	5 000
	01/0, 001, 001, 0M0 (may, fall baisht 0,0 m)
	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 3K6 (no formation of ice, no condensation), 3C3 (no salt
	mist), 3S2 (sand must not get into the devices), 3M6
°C	60
	-25 +80
	40
U	IP00; IP20 with box terminal/cover
	finger-safe, for vertical contact from the front with box terminal/cover
	m °C °C °C °C

Type Test Certific-	Special Te
ates/Test Report	<u>a</u>

<u>pecial Test Certific-</u> ate









Marine / Shipping



**Confirmation** 

other

violded mechanical performance [hp] for 2 phase AC		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 200/208 V		
— at inside-delta circuit at 50 °C rated value	hp	125
• at 220/230 V		
— at standard circuit at 50 °C rated value	hp	75
— at inside-delta circuit at 50 °C rated value	hp	150
• at 460/480 V		
— at standard circuit at 50 °C rated value	hp	150
— at inside-delta circuit at 50 °C rated value	hp	300
contact rating of auxiliary contacts according to UL		B300 / R300

Further information

Simulation Tool for Soft Starters (STS) https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4444-6BC44


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4444-6BC44


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW4444-6BC44

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW4444-6BC44&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW4444-6BC44&lang=en</a>







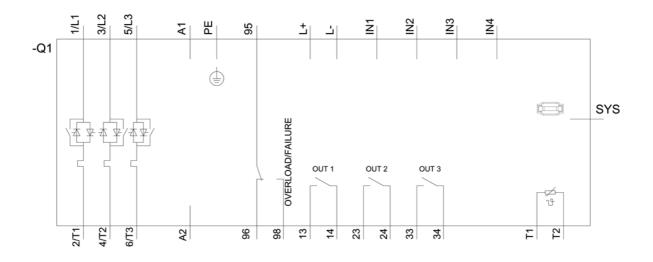

last modified:

12/15/2020 🖸