SIEMENS

Data sheet

3RT2024-1AP00



power contactor, AC-3 12 A, 5.5 kW / 400 V 1 NO + 1 NC, 230 V AC, 50 Hz 3-pole, Size S0 screw terminal

| SIRIUS |
|----------------------------|
| Power contactor |
| 3RT2 |
| |
| SO |
| |
| No |
| Yes |
| 1.5 W |
| 0.5 W |
| 7.6 W |
| |
| 6 kV |
| 6 kV |
| 400 V |
| |
| 7,5g / 5 ms, 4,7g / 10 ms |
| |
| 11,8g / 5 ms, 7,4g / 10 ms |
| |
| 10 000 000 |
| 5 000 000 |
| 10 000 000 |
| Q |
| 01.10.2009 00:00:00 |
| |
| 2 000 m |
| |
| -25 +60 °C |
| -55 +80 °C |
| |
| 3 |
| 3 |
| 690 V |
| |

| operational current | - |
|---|--------------------|
| • at AC-1 at 400 V at ambient temperature 40 °C | 40 A |
| rated value | |
| • at AC-1 | 40.4 |
| — up to 690 V at ambient temperature 40 °C rated value | 40 A |
| — up to 690 V at ambient temperature 60 °C rated value | 35 A |
| • at AC-3 | |
| — at 400 V rated value | 12 A |
| — at 500 V rated value | 12 A |
| — at 690 V rated value | 9 A |
| at AC-4 at 400 V rated value | 12.5 A |
| • at AC-5a up to 690 V rated value | 35.2 A |
| ● at AC-5b up to 400 V rated value | 9.9 A |
| • at AC-6a | |
| up to 230 V for current peak value n=20 rated value | 11.4 A |
| up to 400 V for current peak value n=20 rated value | 11.4 A |
| up to 500 V for current peak value n=20 rated value | 11.3 A |
| up to 690 V for current peak value n=20 rated value at AC-6a | 9 A |
| up to 230 V for current peak value n=30 rated value | 7.6 A |
| — up to 400 V for current peak value n=30 rated value | 7.6 A |
| — up to 500 V for current peak value n=30 rated value | 7.6 A |
| — up to 690 V for current peak value n=30 rated value | 7.6 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 10 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| at 400 V rated value | 5.5 A |
| • at 690 V rated value | 5.5 A |
| operational current | |
| • at 1 current path at DC-1 | |
| — at 24 V rated value | 35 A |
| — at 110 V rated value | 4.5 A |
| — at 220 V rated value | 1 A |
| — at 440 V rated value | 0.4 A |
| — at 600 V rated value | 0.25 A |
| with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 35 A |
| — at 110 V rated value | 35 A |
| — at 220 V rated value | 5 A |
| — at 440 V rated value | 1 A |
| — at 600 V rated value | 0.8 A |
| with 3 current paths in series at DC-1 | |
| — at 24 V rated value | 35 A |
| — at 110 V rated value | 35 A |
| — at 220 V rated value | 35 A |
| | 2.9 A |
| — at 440 V rated value | |
| — at 440 V rated value — at 600 V rated value | 1.4 A |
| | |
| — at 600 V rated value | |

| — at 110 V rated value | 2.5 A |
|---|---|
| — at 220 V rated value | 1 A |
| — at 440 V rated value | 0.09 A |
| — at 600 V rated value | 0.06 A |
| with 2 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 35 A |
| — at 110 V rated value | 15 A |
| — at 220 V rated value | 3 A |
| — at 440 V rated value | 0.27 A |
| — at 600 V rated value | 0.16 A |
| with 3 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 35 A |
| — at 110 V rated value | 35 A |
| — at 220 V rated value | 10 A |
| — at 440 V rated value | 0.6 A |
| — at 600 V rated value | 0.6 A |
| operating power | |
| • at AC-3 | |
| — at 230 V rated value | 3 kW |
| — at 400 V rated value | 5.5 kW |
| — at 500 V rated value | 5.5 kW |
| — at 690 V rated value | 7.5 kW |
| operating power for approx. 200000 operating cycles | |
| at AC-4 | |
| at 400 V rated value | 2.6 kW |
| at 690 V rated value | 4.6 kW |
| operating apparent power at AC-6a | |
| • up to 230 V for current peak value n=20 rated value | 4.5 kV·A |
| • up to 400 V for current peak value n=20 rated value | 7.8 kV·A |
| • up to 500 V for current peak value n=20 rated value | 9.8 kV·A |
| • up to 690 V for current peak value n=20 rated value | 10.7 kV·A |
| operating apparent power at AC-6a | 212/4 |
| • up to 230 V for current peak value n=30 rated value | 3 kV·A |
| • up to 400 V for current peak value n=30 rated value | 5.2 kV·A |
| • up to 500 V for current peak value n=30 rated value | 6.5 kV·A |
| • up to 690 V for current peak value n=30 rated value | 9 kV·A |
| short-time withstand current in cold operating state up to 40 °C | |
| limited to 1 s switching at zero current maximum | 210 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 5 s switching at zero current maximum | 210 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 10 s switching at zero current maximum | 162 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 30 s switching at zero current maximum | 103 A; Use minimum cross-section acc. to AC-1 rated value |
| limited to 60 s switching at zero current maximum | 88 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | |
| • at AC | 5 000 1/h |
| operating frequency | |
| • at AC-1 maximum | 1 000 1/h |
| • at AC-2 maximum | 1 000 1/h |
| • at AC-3 maximum | 1 000 1/h |
| • at AC-4 maximum | 300 1/h |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 230 V |
| operating range factor control supply voltage rated | |
| value of magnet coil at AC | |
| • at 50 Hz | 0.8 1.1 |
| apparent pick-up power of magnet coil at AC | |
| • at 50 Hz | 65 V·A |

| apparent holding power of magnet coil at AC | |
|--|---|
| ● at 50 Hz | 7.6 V·A |
| inductive power factor with the holding power of the coil | |
| • at 50 Hz | 0.25 |
| closing delay | |
| • at AC | 8 40 ms |
| opening delay | |
| • at AC | 4 16 ms |
| arcing time | 10 10 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts instantaneous contact | 1 |
| number of NO contacts for auxiliary contacts instantaneous contact | 1 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| • at 230 V rated value | 10 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| at 690 V rated value | 1 A |
| operational current at DC-12 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 6 A |
| at 60 V rated value | 6 A |
| at 110 V rated value | 3 A |
| at 125 V rated value at 220 V rated value | 2 A 1 A |
| at 220 V rated value at 600 V rated value | 0.15 A |
| operational current at DC-13 | 0.15 A |
| at 24 V rated value | 10 A |
| at 48 V rated value | 2 A |
| • at 60 V rated value | 2 A |
| | 1 A |
| | |
| at 110 V rated value at 125 V rated value | |
| at 110 V rated value at 125 V rated value at 220 V rated value | 0.9 A 0.3 A |
| • at 125 V rated value | 0.9 A |
| at 125 V rated valueat 220 V rated value | 0.9 A 0.3 A |
| at 125 V rated value at 220 V rated value at 600 V rated value | 0.9 A 0.3 A 0.1 A |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts | 0.9 A 0.3 A 0.1 A |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings | 0.9 A 0.3 A 0.1 A |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value at 230 V rated value for 3-phase AC motor | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value for single-phase AC motor at 110/120 V rated value for 3-phase AC motor at 230 V rated value for 3-phase AC motor at 200/208 V rated value | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp 3 hp |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value for single-phase AC motor at 110/120 V rated value for 3-phase AC motor at 230 V rated value for 3-phase AC motor at 200/208 V rated value at 220/230 V rated value | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp 3 hp 3 hp |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value for 3-phase AC motor at 230 V rated value for 3-phase AC motor at 200/208 V rated value at 220/230 V rated value at 460/480 V rated value | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp 3 hp 3 hp 7.5 hp |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value for 3-phase AC motor at 230 V rated value for 3-phase AC motor at 200/208 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp 3 hp 3 hp 7.5 hp 10 hp |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value for single-phase AC motor at 110/120 V rated value for 3-phase AC motor at 230 V rated value for 3-phase AC motor at 200/208 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp 3 hp 3 hp 7.5 hp |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value at 230 V rated value for 3-phase AC motor at 200/208 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value Contact rating of auxiliary contacts according to UL | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp 3 hp 3 hp 7.5 hp 10 hp |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value for 3-phase AC motor at 230 V rated value for 3-phase AC motor at 200/208 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value Contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp 3 hp 3 hp 7.5 hp 10 hp |
| at 125 V rated value at 220 V rated value at 600 V rated value contact reliability of auxiliary contacts UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value at 230 V rated value for 3-phase AC motor at 200/208 V rated value at 220/230 V rated value at 460/480 V rated value at 575/600 V rated value Contact rating of auxiliary contacts according to UL | 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA) 11 A 11 A 1 hp 2 hp 3 hp 3 hp 7.5 hp 10 hp |


- with type of assignment 2 required


 \bullet for short-circuit protection of the auxiliary switch required


gG: 25A (690V,100kA), aM: 20A (690V,100kA), BS88: 25A (415V,80kA) gG: 10 A (500 V, 1 kA)


| Installation/ mounting/ dimensions | |
|--|--|
| mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted |
| fastening method | forward and backward by +/- 22.5° on vertical mounting surface screw and snap-on mounting onto 35 mm standard mounting rail |
| | according to DIN EN 60715 |
| side-by-side mounting | Yes |
| height | 85 mm |
| width | 45 mm |
| depth | 97 mm |
| required spacing | |
| with side-by-side mounting | 10 |
| — forwards | 10 mm |
| — upwards | 10 mm |
| — downwards | 10 mm |
| — at the side | 0 mm |
| for grounded parts | 10 |
| — forwards | 10 mm |
| — upwards | 10 mm |
| — at the side | 6 mm |
| — downwards | 10 mm |
| for live parts for used | 10 mm |
| — forwards | 10 mm |
| — upwards | 10 mm |
| - downwards | 10 mm |
| — at the side | 6 mm |
| Connections/ Terminals | |
| type of electrical connection | |
| for main current circuit | screw-type terminals |
| for auxiliary and control circuit | screw-type terminals |
| at contactor for auxiliary contacts | Screw-type terminals |
| of magnet coil | Screw-type terminals |
| type of connectable conductor cross-sections | |
| • for main contacts | |
| — solid | 2x (1 2.5 mm ²), 2x (2.5 10 mm ²) |
| — solid or stranded | 2x (1 2,5 mm ²), 2x (2,5 10 mm ²) |
| — finely stranded with core end processing | 2x (1 2.5 mm ²), 2x (2.5 6 mm ²), 1x 10 mm ² |
| at AWG cables for main contacts | 2x (16 12), 2x (14 8) |
| connectable conductor cross-section for main contacts | |
| • solid | 1 10 mm² |
| stranded | 1 10 mm ² |
| finely stranded with core end processing | 1 10 mm ² |
| connectable conductor cross-section for auxiliary | |
| contacts | |
| solid or stranded | 0.5 2.5 mm² |
| finely stranded with core end processing | 0.5 2.5 mm² |
| type of connectable conductor cross-sections | |
| for auxiliary contacts | |
| — solid or stranded | 2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²) |
| finely stranded with core end processing | 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) |
| at AWG cables for auxiliary contacts | 2x (20 16), 2x (18 14) |
| AWG number as coded connectable conductor cross section | |
| for main contacts | 16 8 |
| for auxiliary contacts | 20 14 |
| Safety related data | |


| product function mi | irror contact acc. to IE | C 60947-4-1 Y | íes 🛛 | | |
|---|---|---|---|--|-----------------------|
| B10 value with high c | lemand rate acc. to SN | 31920 4 | 450 000 | | |
| proportion of dange | | | | | |
| | nd rate acc. to SN 3192 | 0 4 | 40 % | | |
| | and rate acc. to SN 3192 | | 73 % | | |
| failure rate [FIT] with low demand rate acc. to SN 31920 | | | | | |
| T1 value for proof test interval or service life acc. to | | | 100 FIT | | |
| IEC 61508 | | life acc. to 2 | 20 у | | |
| protection class IP on the front acc. to IEC 60529 | | | ² 20 | | |
| touch protection on the front acc. to IEC 60529 | | | finger-safe, for vertical contact from the front | | |
| • | | | riger bale, for vertical conta | | |
| suitability for use safety-related switching OFF | | | ′es | | |
| Certificates/ approval | 0 | | c3 | | |
| | | | | | |
| General Product Ap | pproval | | | | EMC |
| (Sfr | | | KC | EAC | RCM |
| Functional Safety/Safety of Machinery | Declaration of Cont | formity | Test Certificates | | Marine / Shipping |
| <u>Type Examination</u> <u>Certificate</u> | CE EG-Konf. | <u>UK Declaration c</u> Conformity | of <u>Special Test Certific-</u> <u>ate</u> | <u>Type Test Certific-</u> ates/Test Report | ABS |
| | | | | | |
| Marine / Shipping | | | | | other |
| Marine / Shipping | Lloyds Register uis | RINA | KARS | DNV-GL DNU-COM | other Confirmation |
| Marine / Shipping | Lloyds Register urs | RINA | KMRS RMRS | DNV-GL | |
| BUREAU VERITAS | Lloyds Register urs | RINA | KMRS | DIV-GL | |
| EVENING Other Other Evening Further information Information- and Do https://www.siemens. Industry Mall (Onlin https://mall.industry.s Cax online generato http://support.automa Service&Support (M http://support.industr Image database (pro http://www.automatio Characteristic: Trip | Confirmation Co | /Catalog/product?m /CAXorder/default.ar Characteristics, FA en/ps/3RT2024-1AF ension drawings, 3 cax_de.aspx?mlfb=3 2t, Let-through curr | spx?lang=en&mlfb=3RT202 Qs,) 200 D models, device circuit (8RT2024-1AP00⟨=en rent | 24-1AP00 | Confirmation |
| EVENING other other Evening Further information Information- and Do https://www.siemens. Industry Mall (Onlin https://mall.industry.s Cax online generation http://support.automa Service&Support (M http://support.indust Image database (pro http://www.automatio Characteristic: Trip https://support.indust | Confirmation <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> <u>Confirmation</u> | /Catalog/product?m /CAXorder/default.a: Characteristics, FA en/ps/3RT2024-1AF ension drawings, 3 cax_de.aspx?mlfb=3 2t, Let-through curr en/ps/3RT2024-1AF | spx?lang=en&mlfb=3RT202 Qs,) D models, device circuit (RT2024-1AP00⟨=en rent 200/char | 24-1AP00 | Confirmation |







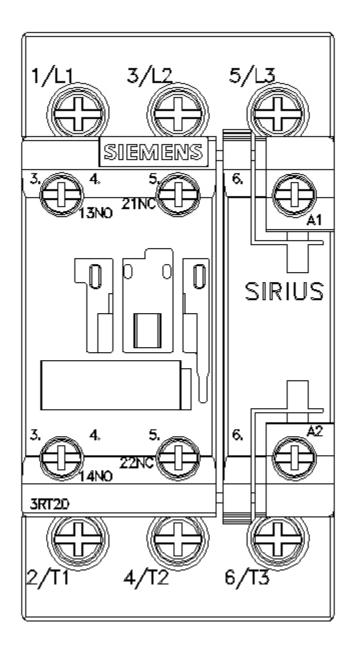

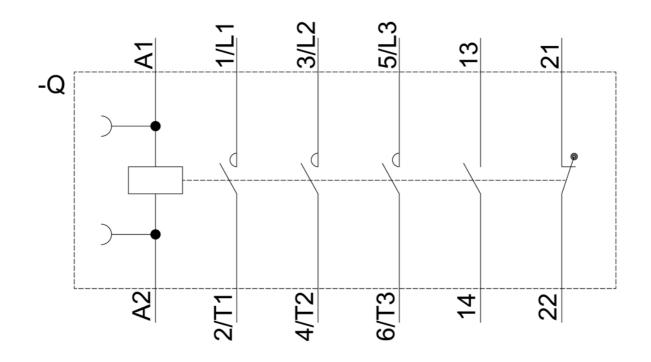

last modified:

7/2/2021 🖸