



Auxiliary current switch 1 CO for cylindrical fuse base Sz. 22 x 58 mm for monitoring of blown-fuse status of striker-fuses

Model							
product brand name	SETRON						
product designation	auxiliary switches						
design of the product	striker fuses						
design of the product / factory mounted	No						
Supply voltage							
operating voltage	250 V						
• rated value							
Switching capacity							
switching capacity current / rated value	5 A						
Control current							
type of voltage / of control voltage	AC						
Product details							
number of fault signal contacts	0						
number of NC contacts	0						
number of NO contacts	0						
number of CO contacts	1						
product extension / can be mounted	others						
product extension	Auxiliary current switch						
Mechanical Design							
height	90 mm						
width	8 mm						
depth	49.8 mm						
number of modular width units	1						
net weight	53 g						
General Product Approval		Declaration of Conformity		Test Certificates		other	

[Confirmation](#)



[Miscellaneous](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3NW7902>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NW7902>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW7902

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

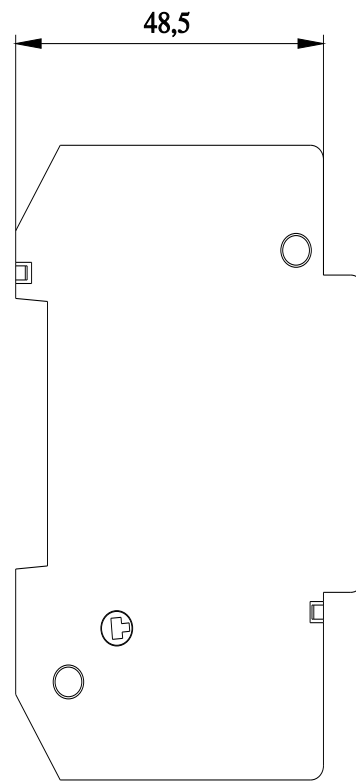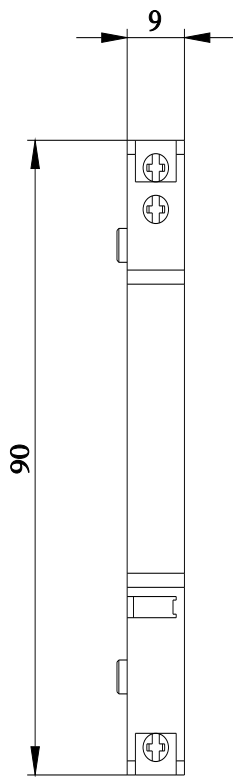

22 14

13/21



