

Busbar, with punchings, Module width 27 mm for NEOZED fuse base D02
CU blank, 36 mm², 1000mm



Model		
product brand name	SENTRON	
product designation	Busbar	
design of the product	D02, CU 36mm ²	
busbar design	flat	
General technical data		
surface processing / tin-plated	No	
Main circuit		
operational current / rated value	168 A	
Product details		
product feature / flexible	Yes	
Mechanical Design		
width	3 mm	
length	1 000 mm	
thickness / of busbar	12 mm	
net weight	260 g	
material / of the busbar	SF-Cu F 24	
General Product Approval	Declaration of Conformity	other

[Confirmation](#)



[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SH5322>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SH5322>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SH5322

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

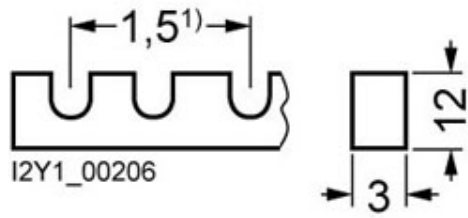

1) Fork spacings in MW (Modular widths, 1 MW = 18 mm).



