



second lateral Auxiliary switch, 1 NO, 1 NC, screw terminal, for contactors 3RT1

| General technical data | |
|---|---|
| product brand name | SIRIUS |
| suitability for use | Contactor relay and power contactor |
| protection class IP on the front | IP20 |
| ambient temperature | |
| • during storage | -55 ... +80 °C |
| • during operation | -25 ... +60 °C |
| mechanical service life (switching cycles) typical | 10 000 000 |
| electrical endurance (switching cycles) at AC-15 at 230 V typical | 200 000 |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| insulation voltage with degree of pollution 3 at AC rated value | 500 V |
| surge voltage resistance rated value | 6 kV |
| Auxiliary circuit | |
| number of NC contacts for auxiliary contacts | |
| • instantaneous contact | 1 |
| number of NO contacts for auxiliary contacts | |
| • instantaneous contact | 1 |
| operational current of auxiliary contacts at AC-12 | |
| • at 24 V | 10 A |
| • at 230 V | 10 A |
| • maximum | 10 A |
| operational current | |
| • of auxiliary contacts | |
| — at AC-14 | |
| — at 125 V | 6 A |
| — at 250 V | 6 A |
| — at AC-15 | |
| — at 24 V | 6 A |
| — at 230 V | 6 A |
| — at 400 V | 3 A |
| operational current | |
| • of auxiliary contacts at DC-12 | |
| — at 24 V | 10 A |
| — at 110 V | 3 A |
| — at 220 V | 1 A |
| • with 2 current paths in series at DC-12 | |

| | |
|---|-------|
| — at 24 V rated value | 10 A |
| — at 60 V rated value | 10 A |
| — at 110 V rated value | 4 A |
| — at 220 V rated value | 2 A |
| — at 440 V rated value | 1.3 A |
| ● with 3 current paths in series at DC-12 | |
| — at 24 V rated value | 10 A |
| — at 60 V rated value | 10 A |
| — at 110 V rated value | 10 A |
| — at 220 V rated value | 3.6 A |
| — at 440 V rated value | 2.5 A |

| | |
|---|-------|
| operational current | |
| ● of auxiliary contacts at DC-13 | |
| — at 24 V | 6 A |
| — at 60 V | 2 A |
| — at 110 V | 1 A |
| — at 220 V | 0.3 A |
| ● with 2 current paths in series at DC-13 | |
| — at 24 V rated value | 10 A |
| — at 60 V rated value | 3.5 A |
| — at 110 V rated value | 1.3 A |
| — at 220 V rated value | 0.9 A |
| — at 440 V rated value | 0.2 A |
| ● with 3 current paths in series at DC-13 | |
| — at 24 V rated value | 10 A |
| — at 60 V rated value | 4.7 A |
| — at 110 V rated value | 3 A |
| — at 220 V rated value | 1.2 A |
| — at 440 V rated value | 0.5 A |

| | |
|---|------------------|
| Installation/ mounting/ dimensions | |
| fastening method | snap-on mounting |
| width | 10 mm |
| height | 80 mm |
| depth | 71 mm |

| | |
|--|---|
| Connections/ Terminals | |
| type of electrical connection for auxiliary and control circuit | screw-type terminals |
| type of connectable conductor cross-sections | |
| ● for auxiliary contacts | |
| — finely stranded | |
| — with core end processing | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| ● at AWG cables for auxiliary contacts | 2x (20 ... 16), 2x (18 ... 14) |

| | |
|---|-----------|
| Safety related data | |
| product function mirror contact acc. to IEC 60947-4-1 | Yes |
| ● note | with 3RT1 |
| product function positively driven operation acc. to IEC 60947-5-1 | No |

| | | |
|---------------------------------|--|----------------------------------|
| Certificates/ approvals | | |
| General Product Approval | Functional Safety/Safety of Machinery | Declaration of Conformity |



[KC](#)



[Type Examination Certificate](#)

[Miscellaneous](#)

| | | | | |
|-----------------------|--------------------------|--------------------------|--------------|----------------|
| Declaration of | Test Certificates | Shipping Approval | other | Railway |
|-----------------------|--------------------------|--------------------------|--------------|----------------|



[Special Test Certificate](#)



[Confirmation](#)

[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH1921-1JA11>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH1921-1JA11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RH1921-1JA11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH1921-1JA11&lang=en

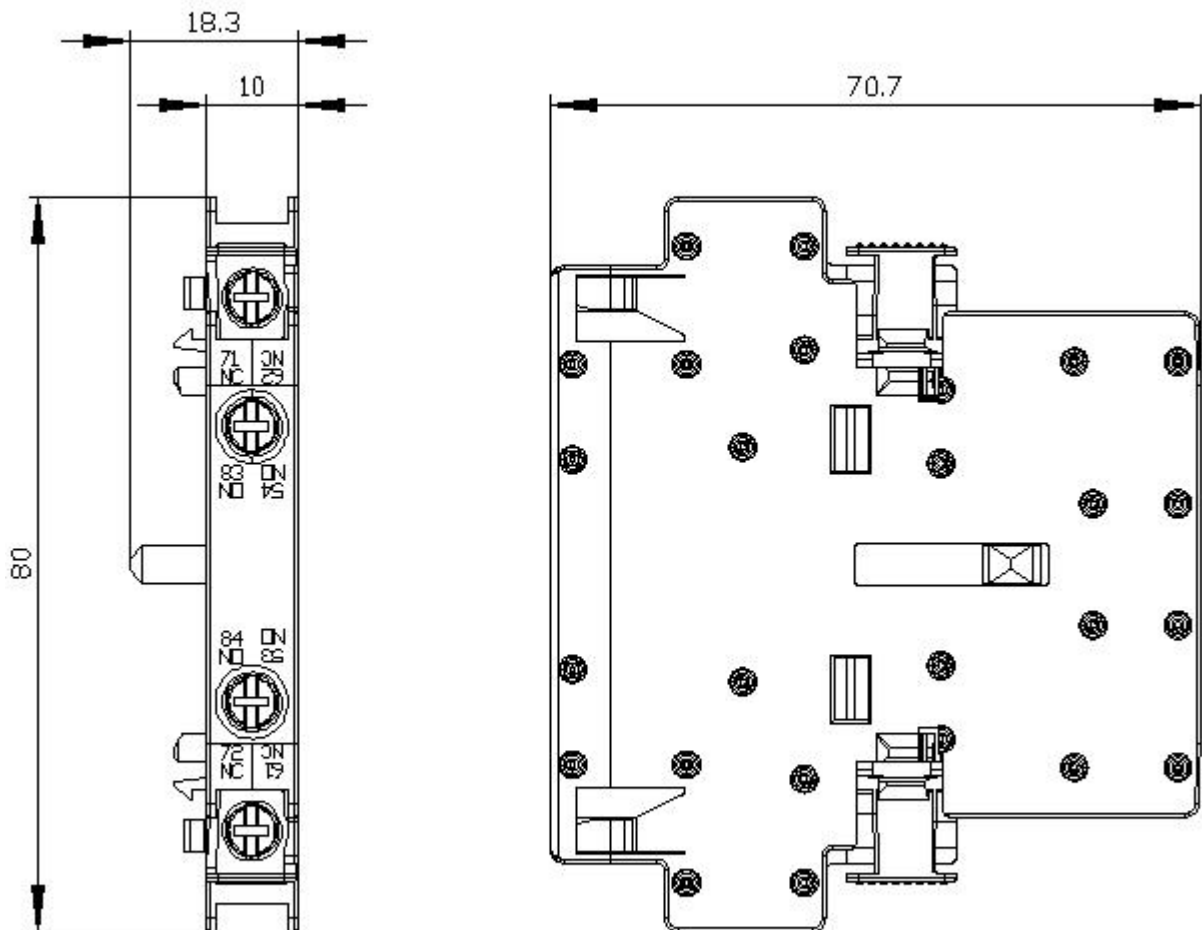

Links / left

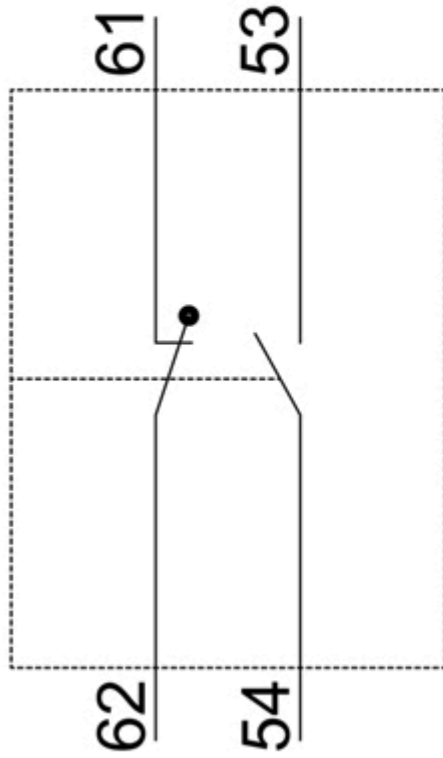

Rechts / right

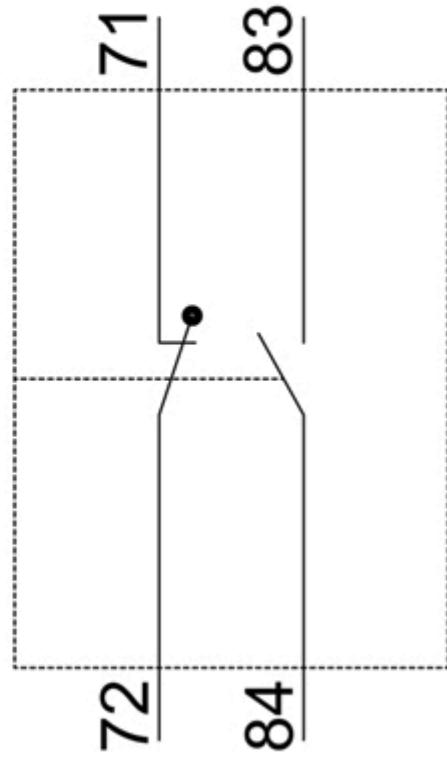

last modified:

1/18/2021 