



Figure similar

Temperature monitoring relay Thermocouple type K, overshoot 1 threshold value, Width 22.5 mm 0 °C to 600 °C 110-120/220-240 V AC 1 NO + 1 NC, quiescent current principle screw terminal

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Temperature monitoring relay
<b>design of the product</b>	Overshoot, 1 threshold value
<b>product type designation</b>	3RS11
<b>General technical data</b>	
<b>reference code acc. to IEC 81346-2</b>	K
<b>measurable temperature</b>	
• initial value	0 °C
• full-scale value	600 °C
<b>Substance Prohibition (Date)</b>	01.05.2012 00:00:00
<b>product function</b>	
• error memory	No
• external reset	No
<b>design of the sensor connectable</b>	type K (thermocouple)
<b>Control circuit/ Control</b>	
<b>type of voltage</b>	AC
<b>control supply voltage 1 at AC</b>	
• at 50 Hz rated value	110 V
• at 60 Hz rated value	110 V
<b>control supply voltage 2 at AC</b>	
• at 50 Hz rated value	230 V
• at 60 Hz rated value	230 V
supply voltage frequency for auxiliary and control circuit	50 ... 60 Hz
<b>number of measuring circuits</b>	1
<b>Auxiliary circuit</b>	
<b>number of NC contacts for auxiliary contacts</b>	1
<b>number of NO contacts for auxiliary contacts</b>	1
number of CO contacts for auxiliary contacts	0
<b>Connections/ Terminals</b>	
type of electrical connection for auxiliary and control circuit	screw-type terminals
<b>type of electrical connection plug-in socket</b>	Yes
<b>Installation/ mounting/ dimensions</b>	
<b>fastening method</b>	screw and snap-on mounting onto 35 mm standard mounting rail
<b>height</b>	102 mm
<b>width</b>	22.5 mm
<b>depth</b>	91 mm
<b>Ambient conditions</b>	
ambient temperature during operation	-25 ... +60 °C

## Certificates/ approvals

General Product Approval	Declaration of Conformity	Test Certificates	other		
 CCC	 UL		 EG-Konf.	<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Confirmation</a>

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RS1101-1CK30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RS1101-1CK30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RS1101-1CK30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RS1101-1CK30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RS1101-1CK30&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RS1101-1CK30/manual>

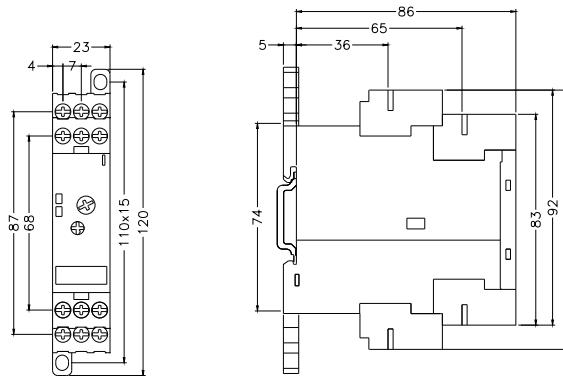

last modified:

2/4/2021 