



Basic unit SIMOCODE pro S, PROFIBUS DP interface 1.5 Mbit/s, 4I/2O freely parameterizable, Us: 24 V DC, input for thermistor connection Monostable relay outputs, expandable by a multifunctional module

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Motor management system
<b>design of the product</b>	Basic device 0
<b>product type designation</b>	SIMOCODE pro S
<b>General technical data</b>	
<b>product function</b>	
• bus communication	Yes
• data acquisition function	Yes
• diagnostics function	Yes
• password protection	Yes
• test function	Yes
• maintenance function	Yes
<b>product component</b>	
• input for thermistor connection	Yes
• digital input	Yes
• input for analog temperature sensors	No
• input for ground fault detection	No
• relay output	Yes
<b>product extension</b>	
• temperature monitoring module	Yes
• current measuring module	Yes
• current/voltage measuring module	No
• fail-safe digital I/O module	No
• ground-fault monitoring module	Yes
• control unit with display	No
• control unit	Yes
• analog I/O module	No
<b>consumed active power</b>	2.1 W
insulation voltage with degree of pollution 3 at AC rated value	300 V
<b>surge voltage resistance rated value</b>	4 000 V
<b>protection class IP</b>	IP20
<b>shock resistance</b>	
• when mounted on current measuring module acc. to IEC 60068-2-27	10 g / 11 ms
• acc. to IEC 60068-2-27	15g / 11 ms
• <b>vibration resistance</b>	
• vibration resistance when mounted on current measuring module acc. to IEC 60068-2-6	1-6 Hz / 15 mm; 6-500 Hz / 2 g 1 ... 4 Hz / 15 mm, 4 ... 500 Hz / 1g
<b>switching capacity current of the NO contacts of the</b>	

<b>relay outputs at AC-15</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 120 V</li> <li>• at 230 V</li> </ul>	<p>6 A</p> <p>6 A</p> <p>3 A</p>
<b>switching capacity current of the NO contacts of the relay outputs at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 60 V</li> <li>• at 125 V</li> </ul>	<p>2 A</p> <p>0.55 A</p> <p>0.25 A</p>
mechanical service life (switching cycles) typical	10 000 000
electrical endurance (switching cycles) typical	100 000
<b>buffering time in the event of power failure</b>	0.02 s
<b>reference code acc. to IEC 81346-2</b>	F
continuous current of the NO contacts of the relay outputs	
<ul style="list-style-type: none"> <li>• at 50 °C</li> <li>• at 60 °C</li> </ul>	<p>6 A</p> <p>5 A</p>
<b>type of input characteristic</b>	Type 1 in accordance with EN 61131-2
<b>Substance Prohibitance (Date)</b>	01.05.2012 00:00:00
<b>certificate of suitability</b>	
<ul style="list-style-type: none"> <li>• according to ATEX directive 2014/34/EU</li> </ul>	BVS 06 ATEX F001
explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2)
<b>Electromagnetic compatibility</b>	
EMC emitted interference acc. to IEC 60947-1	class A
EMC immunity acc. to IEC 60947-1	corresponds to degree of severity 3
<b>conducted interference</b>	
<ul style="list-style-type: none"> <li>• due to burst acc. to IEC 61000-4-4</li> <li>• due to conductor-earth surge acc. to IEC 61000-4-5</li> <li>• due to conductor-conductor surge acc. to IEC 61000-4-5</li> <li>• due to high-frequency radiation acc. to IEC 61000-4-6</li> </ul>	<p>2 kV (power ports) / 1 kV (signal ports)</p> <p>2 kV</p> <p>1 kV</p> <p>10 V</p>
<b>field-based interference acc. to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>conducted HF interference emissions acc. to CISPR11</b>	corresponds to degree of severity A
<b>field-bound HF interference emission acc. to CISPR11</b>	corresponds to degree of severity A
<b>Inputs/ Outputs</b>	
<b>product function</b>	
<ul style="list-style-type: none"> <li>• parameterizable inputs</li> <li>• parameterizable outputs</li> </ul>	<p>Yes</p> <p>Yes</p>
<b>number of inputs</b>	4
<ul style="list-style-type: none"> <li>• for thermistor connection</li> </ul>	1
number of digital inputs with a common reference potential	4
digital input version type 1 acc. to IEC 61131	Yes
input voltage at digital input at DC rated value	24 V
<b>number of outputs</b>	2
<b>number of semiconductor outputs</b>	0
<b>number of outputs as contact-affected switching element</b>	2
<b>switching behavior</b>	monostable
<b>type of relay outputs</b>	Monostable
<b>wire length for digital signals maximum</b>	300 m
<b>wire length for thermistor connection</b>	
<ul style="list-style-type: none"> <li>• with conductor cross-section = 0.5 mm<sup>2</sup> maximum</li> <li>• with conductor cross-section = 1.5 mm<sup>2</sup> maximum</li> <li>• with conductor cross-section = 2.5 mm<sup>2</sup> maximum</li> </ul>	<p>50 m</p> <p>150 m</p> <p>250 m</p>
<b>Protective and monitoring functions</b>	
<b>product function</b>	
<ul style="list-style-type: none"> <li>• asymmetry detection</li> <li>• blocking current evaluation</li> <li>• power factor monitoring</li> </ul>	<p>Yes</p> <p>Yes</p> <p>No</p>

• ground fault detection	Yes
• phase failure detection	Yes
• phase sequence recognition	No
• voltage detection	No
• monitoring of number of start operations	Yes
• overvoltage detection	No
• overcurrent detection 1 phase	Yes
• undervoltage detection	No
• undercurrent detection 1 phase	Yes
• active power monitoring	No
<b>product function</b>	
• current detection	Yes
• overload protection	Yes
• evaluation of thermistor motor protection	Yes
<b>total cold resistance number of sensors in series maximum</b>	1.5 k $\Omega$
<b>response value of thermoresistor</b>	3 400 ... 3 800 $\Omega$
• of the short-circuit control	9 $\Omega$
<b>release value of thermoresistor</b>	1 500 ... 1 650 $\Omega$
<b>Motor control functions</b>	
<b>product function</b>	
• parameterizable overload relay	Yes
• circuit breaker control	Yes
• direct start	Yes
• reverse starting	Yes
• star-delta circuit	Yes
• star-delta reversing circuit	No
• Dahlander circuit	No
• Dahlander reversing circuit	No
• pole-changing switch circuit	No
• pole-changing switch reversing circuit	No
• slide control	No
• valve control	No
<b>Communication/ Protocol</b>	
• protocol is supported PROFIBUS DP protocol	Yes
• protocol is supported PROFINET IO protocol	No
• protocol is supported PROFI-safe protocol	No
• protocol is supported Modbus RTU	No
• protocol is supported EtherNet/IP	No
• protocol is supported OPC UA Server	No
• protocol is supported LLDP	No
• protocol is supported Address Resolution Protocol (ARP)	No
• protocol is supported SNMP	No
• protocol is supported HTTPS	No
• protocol is supported NTP	No
• protocol is supported Media Redundancy Protocol (MRP)	No
• product function is supported Device Level Ring (DLR)	No
<b>number of interfaces</b>	
• acc. to PROFINET	0
• acc. to PROFIBUS	1
• according to Ethernet/IP	0
<b>product function</b>	
• web server	No
• shared device	No
• at the Ethernet interface Autocrossover	No
• at the Ethernet interface Autonegotiation	No
• at the Ethernet interface Autosensing	No
• is supported PROFINET system redundancy	No

<ul style="list-style-type: none"> <li>• supports PROFINergy measured values</li> <li>• supports PROFINergy shutdown</li> </ul>	No
<b>transfer rate maximum</b>	1.5 Mbit/s
<b>identification &amp; maintenance function</b>	
<ul style="list-style-type: none"> <li>• I&amp;M0 - device-specific information</li> <li>• I&amp;M1 – higher level designation/location designation</li> <li>• I&amp;M2 - installation date</li> <li>• I&amp;M3 - comment</li> </ul>	Yes
	Yes
	Yes
	Yes
type of electrical connection of the communication interface	Screw-type terminal (1.5 Mbit)
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	screw and snap-on mounting
<b>height</b>	100 mm
<b>width</b>	22.5 mm
<b>depth</b>	124.5 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>• top</li> <li>• bottom</li> <li>• left</li> <li>• right</li> </ul>	40 mm
	40 mm
	0 mm
	0 mm
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• at AWG cables solid</li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x ( 0.5 ... 1.5 mm <sup>2</sup> )
	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1 mm <sup>2</sup> )
	1x (20 ... 14), 2x (20 ... 16)
tightening torque with screw-type terminals	0.6 ... 0.8 N·m
tightening torque [lbf·in] with screw-type terminals	5.2 ... 7 lbf·in
<b>type of connectable conductor cross-sections for PROFIBUS wire</b>	2x 0.34 mm <sup>2</sup> , AWG 22
<b>Ambient conditions</b>	
<b>installation altitude at height above sea level</b>	
<ul style="list-style-type: none"> <li>• 1 maximum</li> <li>• 2 maximum</li> <li>• 3 maximum</li> </ul>	2 000 m
	3 000 m; max. +50 °C (no protective separation)
	4 000 m; max. +40 °C (no protective separation)
<b>ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-25 ... +60 °C
	-40 ... +80 °C
	-40 ... +80 °C
<b>environmental category</b>	
<ul style="list-style-type: none"> <li>• during operation acc. to IEC 60721</li> <li>• during storage acc. to IEC 60721</li> <li>• during transport acc. to IEC 60721</li> </ul>	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
	1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4
	2K2, 2C1, 2S1, 2M2
<b>relative humidity</b>	
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	10 ... 95 %
<b>contact rating of auxiliary contacts according to UL</b>	B300 / R300
<b>Short-circuit protection</b>	
design of short-circuit protection per output	Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I <sub>K</sub> < 500 A)
<b>Safety related data</b>	
<b>touch protection against electrical shock</b>	finger-safe
<b>Galvanic isolation</b>	
<b>(electrically) protective separation acc. to IEC 60947-1</b>	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)
<b>Control circuit/ Control</b>	
<b>product function soft starter control</b>	Yes

type of voltage of the control supply voltage	DC
control supply voltage at DC	
• rated value	24 V
control supply voltage 1 at DC rated value	24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.2

**Certificates/ approvals**

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping
--------------------------------	---------------------------	-------------------	-------------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

[PROFINET-Certification](#)



**Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7020-1AB01-0>

Cax online generator

<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mlfb=3UF7020-1AB01-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UF7020-1AB01-0>



Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UF7020-1AB01-0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7020-1AB01-0&lang=en)

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

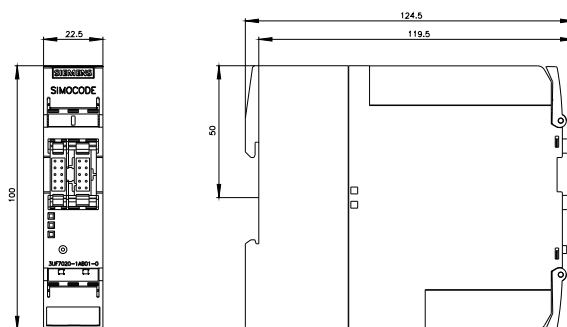

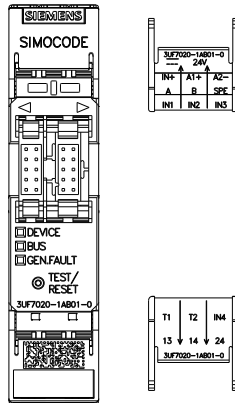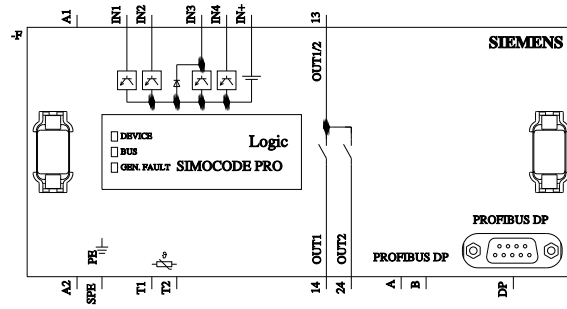

last modified:

1/18/2021