


Pin busbar, 16 mm<sup>2</sup> connection: 2x (3x (1x Phase+HS/FS)) touch-safe



Model					
product brand name	SENTRON				
product designation	Pin busbar				
design of the product	16 mm <sup>2</sup> , 2x(3x(1PH+AS/FC))				
General technical data					
cross-section	16 mm <sup>2</sup>				
Main circuit					
operational current / rated value	80 A				
Product details					
product feature / insulated	Yes				
Connections					
type of electrical connection	Pin				
Mechanical Design					
width	11 mm				
length	156 mm				
net weight	64.89 g				
General Product Approval					
<table border="1"> <thead> <tr> <th>Declaration of Conformity</th> <th>other</th> </tr> </thead> <tbody> <tr> <td> <a href="#">Confirmation</a> </td> <td> <a href="#">Miscellaneous</a> </td> </tr> </tbody> </table>		Declaration of Conformity	other	<a href="#">Confirmation</a>	<a href="#">Miscellaneous</a>
Declaration of Conformity	other				
<a href="#">Confirmation</a>	<a href="#">Miscellaneous</a>				

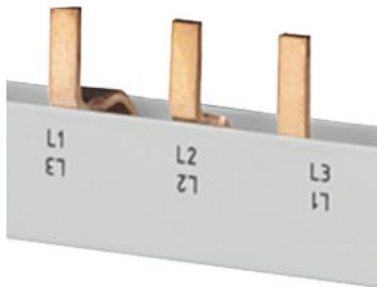

[UK Declaration of Conformity](#)



[Miscellaneous](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3648>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3648>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3648](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3648)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

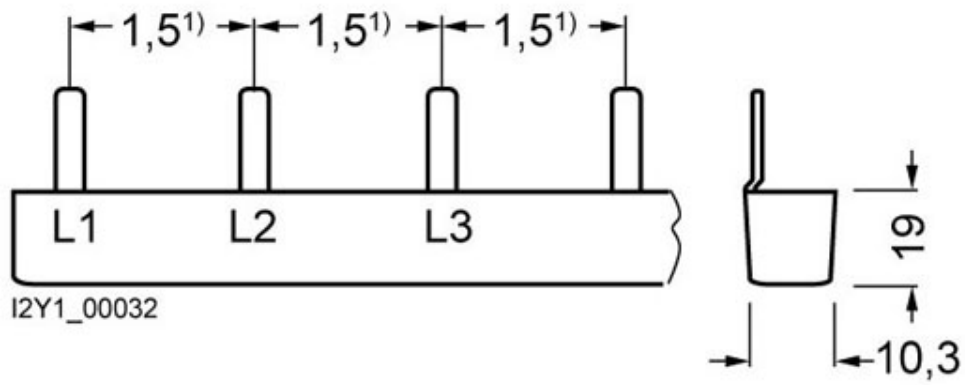

1) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

