

Pin busbar touch-safe, 16 mm² 1-phase, 214 mm long can be cut, with end caps



Model					
product brand name	SENTRON				
product designation	Pin busbar				
design of the product	16 mm ² , 1PH L214mm				
General technical data					
phase number	1				
cross-section	16 mm ²				
Main circuit					
operational current / rated value	80 A				
Product details					
product feature / insulated	Yes				
Connections					
type of electrical connection	Pin				
Mechanical Design					
width	15.5 mm				
length	214 mm				
net weight	43.21 g				
General Product Approval					
<table border="1"> <thead> <tr> <th>Declaration of Conformity</th> <th>other</th> </tr> </thead> <tbody> <tr> <td> Confirmation </td> <td> Miscellaneous </td> </tr> </tbody> </table>		Declaration of Conformity	other	Confirmation	Miscellaneous
Declaration of Conformity	other				
Confirmation	Miscellaneous				



[UK Declaration of Conformity](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3700>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3700>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3700

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

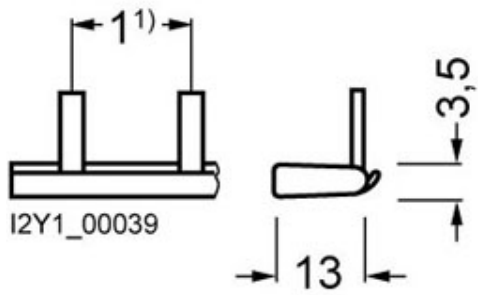

1) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

