


Pin busbar touch-safe, 16 mm² 3-phase+AUX, 214 mm long can be cut, with end caps



| Model | |
|-----------------------------------|------------------------------------|
| product brand name | SENTRON |
| product designation | Pin busbar |
| design of the product | 16 mm ² , 3PH+AS L214mm |
| General technical data | |
| phase number | 3 |
| cross-section | 16 mm ² |
| Main circuit | |
| operational current / rated value | 80 A |
| Product details | |
| product feature / insulated | Yes |
| Connections | |
| type of electrical connection | Pin |
| Mechanical Design | |
| width | 18 mm |
| length | 214 mm |
| net weight | 99 g |
| General Product Approval | |
| Declaration of Conformity | |
| other | |

[Confirmation](#)

[Miscellaneous](#)



[UK Declaration of Conformity](#)



[Miscellaneous](#)

EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3711>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3711>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3711

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

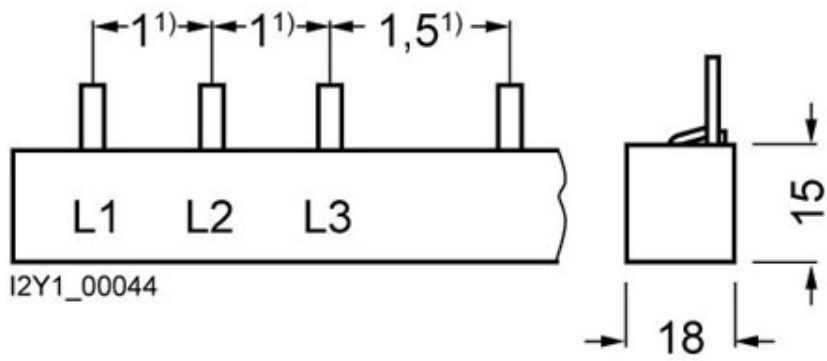

I2Y1_00044

1) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

