

motor operator 24-60V DC accessory for: 3VA1 400/630 3VA2 400/630



| Model  |                                    |
|--|------------------------------------|
| product brand name   | SETRON                             |
| product designation  | Accessories                        |
| Product version  | Motorized operating mechanism (MO) |
| Voltage  |                                    |
| Type de tension pour la commande   | DC                                 |
| Rated operational power  | 250 V·A                            |
| Mechanical Design  |                                    |
| Rated control supply voltage Us with DC  | 60 V                               |
| Height   | 92 mm                              |
| Width  | 138 mm                             |
| depth  | 149 mm                             |
| net weight   | 1 310 g                            |
| connectable conductor cross-section / solid  |                                    |
| • minimum  | 1.5 mm <sup>2</sup>                |
| • maximum  | 2.5 mm <sup>2</sup>                |
| connectable conductor cross-section / finely stranded / with core end processing   |                                    |
| • minimum  | 1.5 mm <sup>2</sup>                |
| • maximum  | 2.5 mm <sup>2</sup>                |
| connectable conductor cross-section / stranded   |                                    |
| • minimum  | 1.5 mm <sup>2</sup>                |
| • maximum  | 2.5 mm <sup>2</sup>                |
| ambient temperature / during operation   |                                    |
| • minimum  | -25 °C                             |
| • maximum  | 70 °C                              |
| ambient temperature / during storage   |                                    |
| • minimum  | -40 ... +80                        |
| • maximum  |                                    |
| tightening torque  |                                    |
| • minimum  | 0.36 N·m                           |
| • maximum  | 0.44 N·m                           |
| Connections according IEC  |                                    |
| stripped length  | 7 mm                               |
| Further information  |                                    |
| <b>Information- and Downloadcenter (Catalogs, Brochures,...)</b><br><a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a><br><b>Industry Mall (Online ordering system)</b> |                                    |

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9467-0HA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9467-0HA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9467-0HA10](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9467-0HA10)


CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

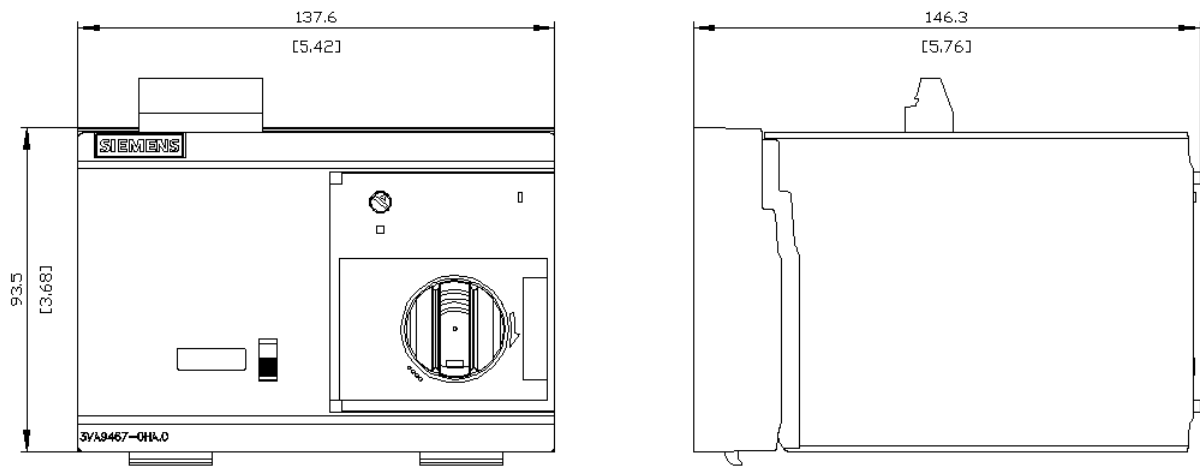

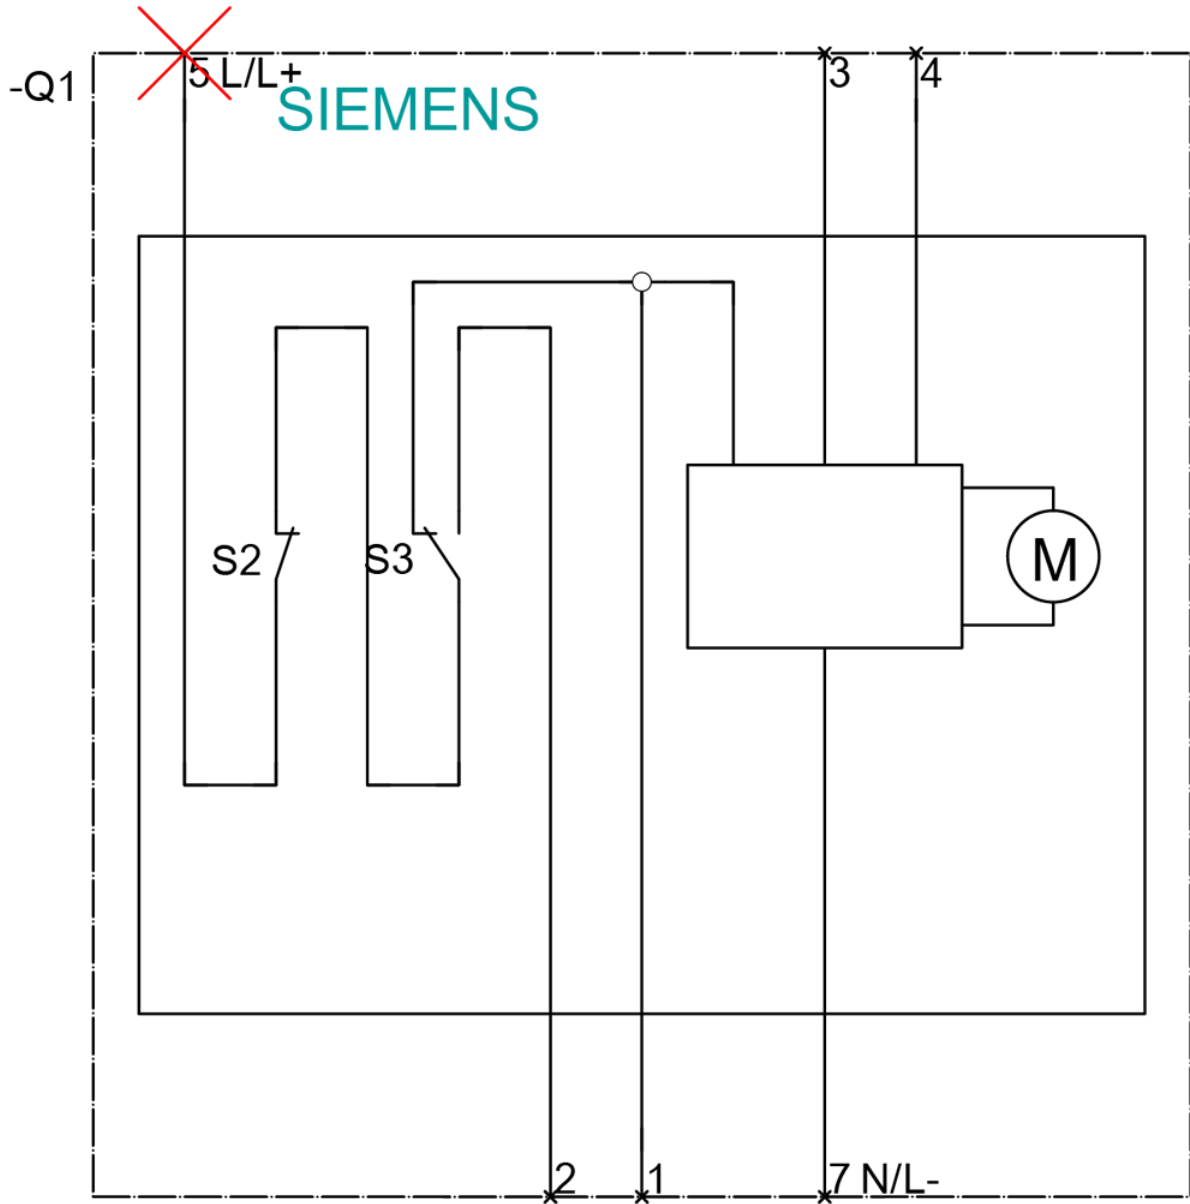

last modified:

4/29/2021 