SIEMENS

Data sheet

3VA9467-0HA20



motor operator 110-230V AC/110-250V DC accessory for: 3VA1 400/630 3VA2 400/630

Model	
product brand name	SENTRON
product designation	Accessories
Product version	Motorized operating mechanism (MO)
Voltage	
Type de tension pour la commande	AC/DC
 Rated control supply voltage Us at AC 50 Hz 	110 V
Rated control supply voltage Us at AC 50 Hz	230 V
 Rated control supply voltage Us at AC 60 Hz 	110 V
Rated control supply voltage Us at AC 60 Hz	230 V
Rated operational power	250 V·A
Mechanical Design	
Rated control supply voltage Us with DC	250 V
Height	92 mm
Width	138 mm
depth	149 mm
net weight	1 310 g
connectable conductor cross-section / solid	
• minimum	1.5 mm ²
• maximum	2.5 mm ²
connectable conductor cross-section / finely stranded / with core end processing	
• minimum	1.5 mm ²
• maximum	2.5 mm ²
connectable conductor cross-section / stranded	
• minimum	1.5 mm ²
• maximum	2.5 mm ²
ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-40 +80
• maximum	
tightening torque	
• minimum	0.36 N·m
• maximum	0.44 N·m
Connections according IEC	

stripped I	ength
------------	-------

7 mm


Further information


Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9467-0HA20 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3VA9467-0HA20 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9467-0HA20 CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

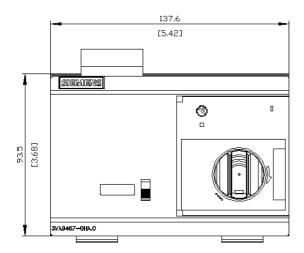

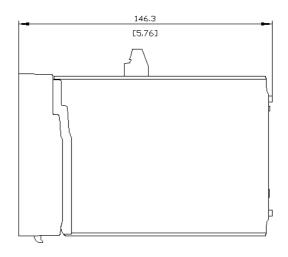

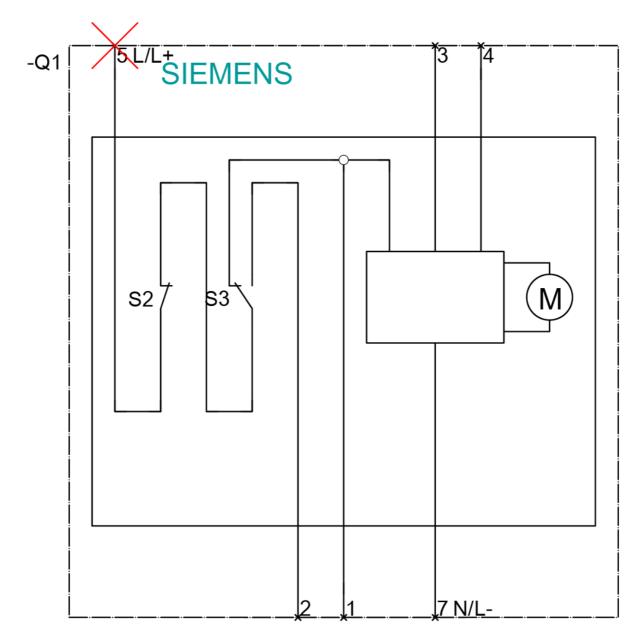

last modified:

4/29/2021 🖸