



synchronizable motor operator 110-230V AC/110-250V DC incl. COM accessory for: 3VA2 100/160/250

Model	
product brand name	SENTRON
product designation	Accessories
Product version	Motorized operating mechanism with stored energy mechanism (SEO)
Voltage	
Type de tension pour la commande	AC/DC
<ul style="list-style-type: none"> <li>Rated control supply voltage <math>U_s</math> at AC 50 Hz</li> <li>Rated control supply voltage <math>U_s</math> at AC 50 Hz</li> </ul>	110 V 240 V
<ul style="list-style-type: none"> <li>Rated control supply voltage <math>U_s</math> at AC 60 Hz</li> <li>Rated control supply voltage <math>U_s</math> at AC 60 Hz</li> </ul>	110 V 240 V
Rated operational power	300 V·A
Mechanical Design	
Rated control supply voltage $U_s$ with DC	250 V
Height	118.7 mm
Width	105 mm
depth	162.8 mm
net weight	1 877 g
connectable conductor cross-section / solid	
<ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>	1.5 mm <sup>2</sup> 2.5 mm <sup>2</sup>
connectable conductor cross-section / finely stranded / with core end processing	
<ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>	1.5 mm <sup>2</sup> 2.5 mm <sup>2</sup>
connectable conductor cross-section / stranded	
<ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>	1.5 mm <sup>2</sup> 2.5 mm <sup>2</sup>
ambient temperature / during operation	
<ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>	-25 °C 70 °C
ambient temperature / during storage	
<ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>	-40 ... +80
tightening torque	
<ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>	0.36 N·m 0.44 N·m
Connections according IEC	

stripped length

7 mm

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9267-0HC35>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9267-0HC35>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9267-0HC35](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9267-0HC35)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

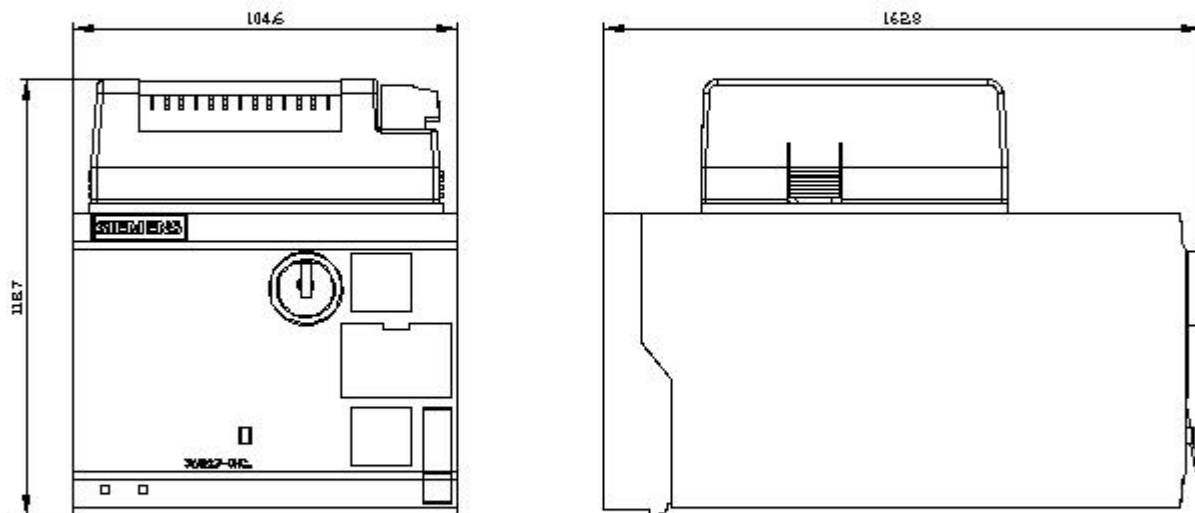

last modified:

4/29/2021 