



Power contactor, AC-3 225 A, 110 kW / 400 V AC (50-60 Hz) / DC operation 23-26 V UC Auxiliary contacts 2 NO + 2 NC 3-pole, Size S10 Busbar connections Drive: conventional screw terminal








|  |                            |
|--|----------------------------|
| <b>product brand name</b>  | SIRIUS                     |
| <b>product designation</b>   | Power contactor            |
| <b>product type designation</b>  | 3RT1                       |
| <b>General technical data</b>  |                            |
| <b>size of contactor</b>   | S10                        |
| <b>product extension</b>   |                            |
| • function module for communication  | No                         |
| • auxiliary switch   | Yes                        |
| <b>power loss [W] for rated value of the current at AC in hot operating state</b>                | 51 W                       |
| • per pole   | 17 W                       |
| <b>power loss [W] for rated value of the current without load current share typical</b>          | 7.4 W                      |
| <b>surge voltage resistance</b>  |                            |
| • of main circuit rated value  | 8 kV                       |
| • of auxiliary circuit rated value   | 6 kV                       |
| maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1 | 690 V                      |
| <b>shock resistance at rectangular impulse</b>   |                            |
| • at AC  | 8,5g / 5 ms, 4,2g / 10 ms  |
| • at DC  | 8,5g / 5 ms, 4,2g / 10 ms  |
| <b>shock resistance with sine pulse</b>  |                            |
| • at AC  | 13,4g / 5 ms, 6,5g / 10 ms |
| • at DC  | 13,4g / 5 ms, 6,5g / 10 ms |
| <b>mechanical service life (switching cycles)</b>  |                            |
| • of contactor typical   | 10 000 000                 |
| • of the contactor with added electronically optimized auxiliary switch block typical            | 5 000 000                  |
| • of the contactor with added auxiliary switch block typical                                     | 10 000 000                 |
| <b>reference code acc. to IEC 81346-2</b>  | Q                          |
| Substance Prohibition (Date)   | 01.05.2012 00:00:00        |
| <b>Ambient conditions</b>  |                            |
| installation altitude at height above sea level maximum  | 2 000 m                    |
| <b>ambient temperature</b>   |                            |
| • during operation   | -25 ... +60 °C             |
| • during storage   | -55 ... +80 °C             |
| <b>relative humidity minimum</b>   | 10 %                       |
| <b>relative humidity at 55 °C acc. to IEC 60068-2-30</b>   | 95 %                       |

|   |   |
|---|---|
| <b>maximum</b>  |   |
| <b>Main circuit</b>   |   |
| <b>number of poles for main current circuit</b>   | 3   |
| <b>number of NO contacts for main contacts</b>  | 3   |
| operating voltage at AC-3 rated value maximum   | 1 000 V   |
| <b>operational current</b>  |   |
| <ul style="list-style-type: none"> <li>● at AC-1 at 400 V at ambient temperature 40 °C rated value</li> </ul>   | 275 A   |
| <ul style="list-style-type: none"> <li>● at AC-1 <ul style="list-style-type: none"> <li>— up to 690 V at ambient temperature 40 °C rated value</li> <li>— up to 690 V at ambient temperature 60 °C rated value</li> <li>— up to 1000 V at ambient temperature 40 °C rated value</li> <li>— up to 1000 V at ambient temperature 60 °C rated value</li> </ul> </li> </ul>   | 275 A<br>250 A<br>100 A<br>100 A                  |
| <ul style="list-style-type: none"> <li>● at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> <li>— at 1000 V rated value</li> </ul> </li> </ul>  | 225 A<br>225 A<br>225 A<br>68 A                   |
| ● at AC-4 at 400 V rated value  | 195 A   |
| ● at AC-5a up to 690 V rated value  | 242 A   |
| ● at AC-5b up to 400 V rated value  | 186 A   |
| ● at AC-6a <ul style="list-style-type: none"> <li>— up to 230 V for current peak value n=20 rated value</li> <li>— up to 400 V for current peak value n=20 rated value</li> <li>— up to 500 V for current peak value n=20 rated value</li> <li>— up to 690 V for current peak value n=20 rated value</li> <li>— up to 1000 V for current peak value n=20 rated value</li> </ul>                                   | 225 A<br>225 A<br>225 A<br>225 A<br>68 A          |
| ● at AC-6a <ul style="list-style-type: none"> <li>— up to 230 V for current peak value n=30 rated value</li> <li>— up to 400 V for current peak value n=30 rated value</li> <li>— up to 500 V for current peak value n=30 rated value</li> <li>— up to 690 V for current peak value n=30 rated value</li> <li>— up to 1000 V for current peak value n=30 rated value</li> </ul>                                   | 172 A<br>172 A<br>172 A<br>172 A<br>68 A          |
| minimum cross-section in main circuit at maximum AC-1 rated value   | 150 mm <sup>2</sup>                               |
| <b>operational current for approx. 200000 operating cycles at AC-4</b>  |   |
| <ul style="list-style-type: none"> <li>● at 400 V rated value</li> <li>● at 690 V rated value</li> </ul>  | 96 A<br>85 A                                      |
| <b>operational current</b>  |   |
| <ul style="list-style-type: none"> <li>● at 1 current path at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>● with 2 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> </ul> </li> </ul> | 200 A<br>18 A<br>3.4 A<br>0.8 A<br>0.5 A<br>200 A |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> <li>● with 3 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul>   | 200 A<br>20 A<br>3.2 A<br>1.6 A<br>200 A<br>200 A<br>200 A<br>11 A<br>4 A   |
| <b>operational current</b> <ul style="list-style-type: none"> <li>● at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>● with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> <li>● with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> <li>— at 220 V rated value</li> <li>— at 440 V rated value</li> <li>— at 600 V rated value</li> </ul> </li> </ul> | 200 A<br>2.5 A<br>0.6 A<br>0.17 A<br>0.12 A<br>200 A<br>200 A<br>2.5 A<br>0.65 A<br>0.37 A<br>200 A<br>200 A<br>200 A<br>1.4 A<br>0.75 A  |
| <b>operating power</b> <ul style="list-style-type: none"> <li>● at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> <li>— at 1000 V rated value</li> </ul> </li> </ul>   | 55 kW<br>110 kW<br>160 kW<br>200 kW<br>90 kW  |
| <b>operating power for approx. 200000 operating cycles at AC-4</b> <ul style="list-style-type: none"> <li>● at 400 V rated value</li> <li>● at 690 V rated value</li> </ul>   | 54 kW<br>82 kW  |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=20 rated value</li> <li>● up to 400 V for current peak value n=20 rated value</li> <li>● up to 500 V for current peak value n=20 rated value</li> <li>● up to 690 V for current peak value n=20 rated value</li> <li>● up to 1000 V for current peak value n=20 rated value</li> </ul>   | 90 000 kV·A<br>150 000 V·A<br>190 000 V·A<br>260 000 V·A<br>110 000 V·A   |
| <b>operating apparent power at AC-6a</b> <ul style="list-style-type: none"> <li>● up to 230 V for current peak value n=30 rated value</li> <li>● up to 400 V for current peak value n=30 rated value</li> <li>● up to 500 V for current peak value n=30 rated value</li> <li>● up to 690 V for current peak value n=30 rated value</li> <li>● up to 1000 V for current peak value n=30 rated value</li> </ul>   | 60 000 V·A<br>110 000 V·A<br>140 000 V·A<br>200 000 V·A<br>110 000 V·A  |
| <b>short-time withstand current in cold operating state up to 40 °C</b> <ul style="list-style-type: none"> <li>● limited to 1 s switching at zero current maximum</li> <li>● limited to 5 s switching at zero current maximum</li> <li>● limited to 10 s switching at zero current maximum</li> </ul>   | 4 000 A; Use minimum cross-section acc. to AC-1 rated value<br>2 807 A; Use minimum cross-section acc. to AC-1 rated value<br>2 082 A; Use minimum cross-section acc. to AC-1 rated value |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• limited to 30 s switching at zero current maximum</li> <li>• limited to 60 s switching at zero current maximum</li> </ul> | 1 397 A; Use minimum cross-section acc. to AC-1 rated value<br>1 144 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b>   |  |
| <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>   | 2 000 1/h<br>2 000 1/h   |
| <b>operating frequency</b>   |  |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> <li>• at AC-2 maximum</li> <li>• at AC-3 maximum</li> <li>• at AC-4 maximum</li> </ul>               | 750 1/h<br>250 1/h<br>500 1/h<br>130 1/h   |
| <b>Control circuit/ Control</b>  |  |
| <b>type of voltage of the control supply voltage</b>   | AC/DC  |
| <b>control supply voltage at AC</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> <li>• at 60 Hz rated value</li> </ul>   | 23 ... 26 V<br>23 ... 26 V   |
| <b>control supply voltage at DC</b>  |  |
| <ul style="list-style-type: none"> <li>• rated value</li> </ul>  | 23 ... 26 V  |
| <b>operating range factor control supply voltage rated value of magnet coil at DC</b>  |  |
| <ul style="list-style-type: none"> <li>• initial value</li> <li>• full-scale value</li> </ul>  | 0.8<br>1.1   |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 0.8 ... 1.1<br>0.8 ... 1.1   |
| <b>design of the surge suppressor</b>  | with varistor  |
| <b>apparent pick-up power of magnet coil at AC</b>   |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 590 V·A<br>590 V·A   |
| <b>inductive power factor with closing power of the coil</b>   |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 0.9<br>0.9   |
| <b>apparent holding power of magnet coil at AC</b>   |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 6.7 V·A<br>6.7 V·A   |
| <b>inductive power factor with the holding power of the coil</b>   |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>   | 0.9<br>0.9   |
| <b>closing power of magnet coil at DC</b>  | 650 W  |
| <b>holding power of magnet coil at DC</b>  | 7.4 W  |
| <b>closing delay</b>   |  |
| <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>   | 30 ... 95 ms<br>30 ... 95 ms   |
| <b>opening delay</b>   |  |
| <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>   | 40 ... 80 ms<br>40 ... 80 ms   |
| <b>arcing time</b>   | 10 ... 15 ms   |
| <b>control version of the switch operating mechanism</b>   | Standard A1 - A2   |
| <b>Auxiliary circuit</b>   |  |
| number of NC contacts for auxiliary contacts<br>instantaneous contact  | 2  |
| number of NO contacts for auxiliary contacts<br>instantaneous contact  | 2  |
| operational current at AC-12 maximum   | 10 A   |
| <b>operational current at AC-15</b>  |  |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> </ul>                           | 6 A<br>3 A<br>2 A  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>  | 1 A  |
| <b>operational current at DC-12</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 10 A<br>6 A<br>6 A<br>3 A<br>2 A<br>1 A<br>0.15 A  |
| <b>operational current at DC-13</b> <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 10 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.1 A   |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)  |
| <b>UL/CSA ratings</b>   |  |
| <b>full-load current (FLA) for 3-phase AC motor</b> <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 180 A<br>192 A   |
| <b>yielded mechanical performance [hp]</b> <ul style="list-style-type: none"> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>   | 60 hp<br>75 hp<br>150 hp<br>200 hp   |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / Q600  |
| <b>Short-circuit protection</b>   |  |
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>  | gG: 500 A (690 V, 100 kA)<br>gG: 400 A (690 V, 100 kA), aM: 315 A (690 V, 50 kA), BS88: 400 A (415 V, 50 kA)<br>gG: 10 A (500 V, 1 kA) |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back               |
| <b>fastening method</b> <ul style="list-style-type: none"> <li>• side-by-side mounting</li> </ul>   | screw fixing<br>Yes  |
| <b>height</b>   | 210 mm   |
| <b>width</b>  | 145 mm   |
| <b>depth</b>  | 202 mm   |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> </ul> </li> </ul> | 20 mm<br>10 mm<br>10 mm<br>0 mm<br>20 mm<br>10 mm<br>10 mm<br>10 mm<br>20 mm<br>10 mm  |

|  |  |   |
|--|--|---|
| — downwards  | 10 mm  |   |
| — at the side  | 10 mm  |   |
| <b>Connections/ Terminals</b>  |  |   |
| <b>width of connection bar</b>   | 25 mm  |   |
| <b>thickness of connection bar</b>   | 6 mm   |   |
| <b>diameter of holes</b>   | 11 mm  |   |
| <b>number of holes</b>   | 1  |   |
| <b>type of electrical connection</b>   | Connection bar<br>screw-type terminals<br>Screw-type terminals<br>Screw-type terminals                       |   |
| • for main current circuit   |  |   |
| • for auxiliary and control circuit  |  |   |
| • at contactor for auxiliary contacts  |  |   |
| • of magnet coil   |  |   |
| <b>type of connectable conductor cross-sections</b>  |  |   |
| • at AWG cables for main contacts  | 2/0 ... 500 kcmil  |   |
| <b>connectable conductor cross-section for main contacts</b>   |  |   |
| • stranded   | 70 ... 240 mm <sup>2</sup>   |   |
| <b>connectable conductor cross-section for auxiliary contacts</b>  |  |   |
| • solid or stranded  | 0.5 ... 4 mm <sup>2</sup>  |   |
| • finely stranded with core end processing   | 0.5 ... 2.5 mm <sup>2</sup>  |   |
| <b>type of connectable conductor cross-sections</b>  |  |   |
| • for auxiliary contacts   |  |   |
| — solid  | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ), max. 2x (0.75 ... 4 mm <sup>2</sup> ) |   |
| — solid or stranded  | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> ), max. 2x (0,75 ... 4 mm <sup>2</sup> ) |   |
| — finely stranded with core end processing   | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )  |   |
| • at AWG cables for auxiliary contacts   | 2x (20 ... 16), 2x (18 ... 14), 1x 12  |   |
| <b>AWG number as coded connectable conductor cross section</b>   |  |   |
| • for auxiliary contacts   | 18 ... 14  |   |
| <b>Safety related data</b>   |  |   |
| <b>product function mirror contact acc. to IEC 60947-4-1</b>   | Yes  |   |
| B10 value with high demand rate acc. to SN 31920   | 1 000 000  |   |
| product function positively driven operation acc. to IEC 60947-5-1   | No   |   |
| <b>protection class IP on the front acc. to IEC 60529</b>  | IP00; IP20 with box terminal/cover   |   |
| <b>touch protection on the front acc. to IEC 60529</b>   | finger-safe, for vertical contact from the front with box terminal/cover                                     |   |
| <b>suitability for use</b>   |  |   |
| • safety-related switching OFF   | Yes  |   |
| <b>Certificates/ approvals</b>   |  |   |
| <b>General Product Approval</b>  | EMC  |   |
|    <a href="#">KC</a>   |  |   |
| <b>Functional Safety/Safety of Machinery</b>   | <b>Test Certificates</b>   | <b>Marine / Shipping</b>  |
| <a href="#">Type Examination Certificate</a>   | <a href="#">Type Test Certificates/Test Report</a>   | <a href="#">Special Test Certificate</a>  |
|  |  | <a href="#">Miscellaneous</a>   |
|  |  |   |
| <b>Marine / Shipping</b>   | <b>other</b>   | <b>Railway</b>  |



[Confirmation](#)

[Miscellaneous](#)

[Confirmation](#)

[Miscellaneous](#)

[Special Test Certificate](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1064-6AB36>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1064-6AB36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1064-6AB36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1064-6AB36&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1064-6AB36&lang=en)


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1064-6AB36/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1064-6AB36&objectype=14&gridview=view1>

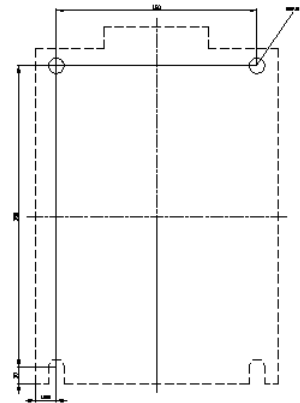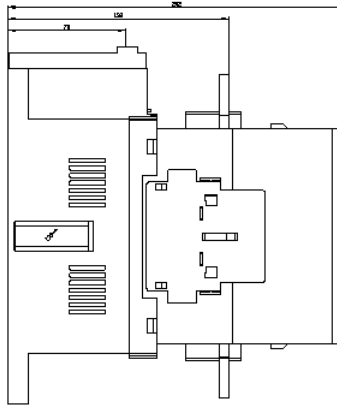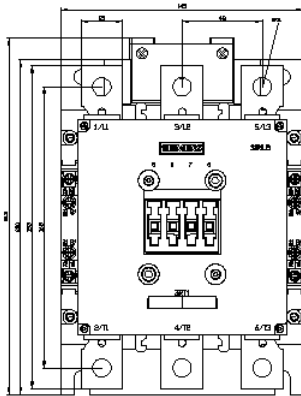

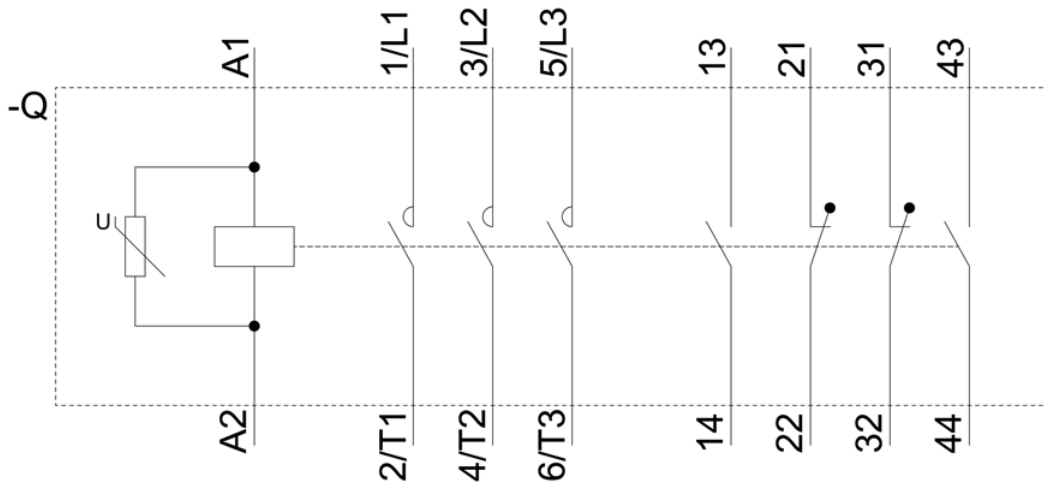

last modified:

7/22/2021 