

Siemens  
EcoTech



Electronics module IO-Link for ID key-operated switch, with 5 pre-programmed electronic switches, controller and RFID authentication of the switching function, black, operating voltage 24 V DC, screw terminal, for front plate mounting, for industrial application in control cabinets and machines



|   |  |
|---|--|
| product brand name  | SIRIUS ACT   |
| product designation   | Electronic module for ID key-operated switches             |
| product type designation  | 3SU1   |
| <b>Actuator</b>   |  |
| product extension optional light source                             | No   |
| <b>Contact block/ lampholder</b>                                    |  |
| socket design   | other  |
| <b>Display</b>  |  |
| number of LEDs  | 4  |
| <b>General technical data</b>                                       |  |
| insulation voltage rated value                                      | 30 V   |
| degree of pollution   | 3  |
| type of voltage   |  |
| • of the operating voltage  | DC   |
| • of the input voltage  | DC   |
| surge voltage resistance rated value                                | 0.8 kV   |
| consumed current maximum  | 49 mA  |
| protection class IP   | IP20, clamping screw tightened                             |
| reference code according to IEC 81346-2                             | P  |
| Substance Prohibitance (Date)                                       | 10/01/2014   |
| SVHC substance name   | Lead - 7439-92-1<br>Lead monoxide (lead oxide) - 1317-36-8 |
| Weight  | 0.062 kg   |
| operating voltage   |  |
| • rated value   | 18 ... 30 V  |
| • at DC rated value   | 24 V   |
| operating voltage 1 at DC rated value                               | 24 V   |
| <b>Communication/ Protocol</b>                                      |  |
| protocol is supported IO-Link protocol                              | Yes  |
| IO-Link transfer rate   | COM2 (38,4 kBaud)  |
| point-to-point cycle time between master and IO-Link device minimum | 10 ms  |
| type of voltage supply via input/output link master                 | Yes  |
| data volume   |  |
| • of the address range of the inputs with cyclical transfer total   | 2 byte   |
| • of the address range of the outputs with cyclical transfer total  | 0 byte   |

| Auxiliary circuit  |   |
|--|---|
| number of NC contacts for auxiliary contacts                   | 0   |
| number of NO contacts for auxiliary contacts                   | 5   |
| Inputs/ Outputs  |   |
| number of digital inputs                                       | 0   |
| • safety-related   | 0   |
| number of digital outputs                                      | 5   |
| output voltage at digital output at DC rated value             | 23.5 V  |
| output current per output                                      | 250 mA  |
| Connections/ Terminals   |   |
| type of electrical connection                                  | screw terminal  |
| type of connectable conductor cross-sections                   |   |
| • solid without core end processing                            | 1x (0.2 ... 2.5 mm <sup>2</sup> )   |
| • finely stranded with core end processing                     | 1x (0.25 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 0.75 mm <sup>2</sup> )                                |
| • finely stranded without core end processing                  | 1x (0.2 ... 2.5 mm <sup>2</sup> ), 2x (0.2 ... 0.75 mm <sup>2</sup> )                                 |
| • for AWG cables   | 1x (26 ... 14)  |
| tightening torque with screw-type terminals                    | 0.4 ... 0.4 N·m   |
| Product Function   |   |
| product function parameterizable                               | Yes   |
| Safety related data  |   |
| MTBF   |   |
| • at 70 °C   | 138 a   |
| • at full load at 25 °C  | 141 a   |
| Electrical Safety  |   |
| touch protection against electrical shock                      | finger-safe   |
| Ambient conditions   |   |
| ambient temperature  |   |
| • during operation   | -25 ... +70 °C  |
| • during storage   | -40 ... +80 °C  |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted) |
| Environmental footprint  |   |
| Environmental Product Declaration (EPD)                        | Yes   |
| Global Warming Potential [CO2 eq] total                        | 0.787 kg  |
| Global Warming Potential [CO2 eq] during manufacturing         | 0.566 kg  |
| Global Warming Potential [CO2 eq] during operation             | 0.235 kg  |
| Global Warming Potential [CO2 eq] after end of life            | -0.015 kg   |
| Siemens Eco Profile (SEP)                                      | Siemens EcoTech   |
| Installation/ mounting/ dimensions                             |   |
| fastening method   | front plate mounting  |
| • of modules and accessories                                   | Front plate mounting  |
| height   | 36 mm   |
| width  | 50 mm   |
| depth  | 36.4 mm   |
| required spacing with side-by-side mounting                    |   |
| • forwards   | 100 mm  |
| • backwards  | 100 mm  |
| • upwards  | 100 mm  |
| • downwards  | 100 mm  |
| • at the side  | 100 mm  |
| Measuring circuit  |   |
| product function   | IO-Link 24 V DC   |
| Approvals Certificates   |   |
| General Product Approval                                       | Test Certificates   |



[Confirmation](#)



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)



Siemens  
EcoTech



[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-1GD10-1AA0>

##### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-1GD10-1AA0>


##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-1GD10-1AA0>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1400-1GD10-1AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-1GD10-1AA0&lang=en)

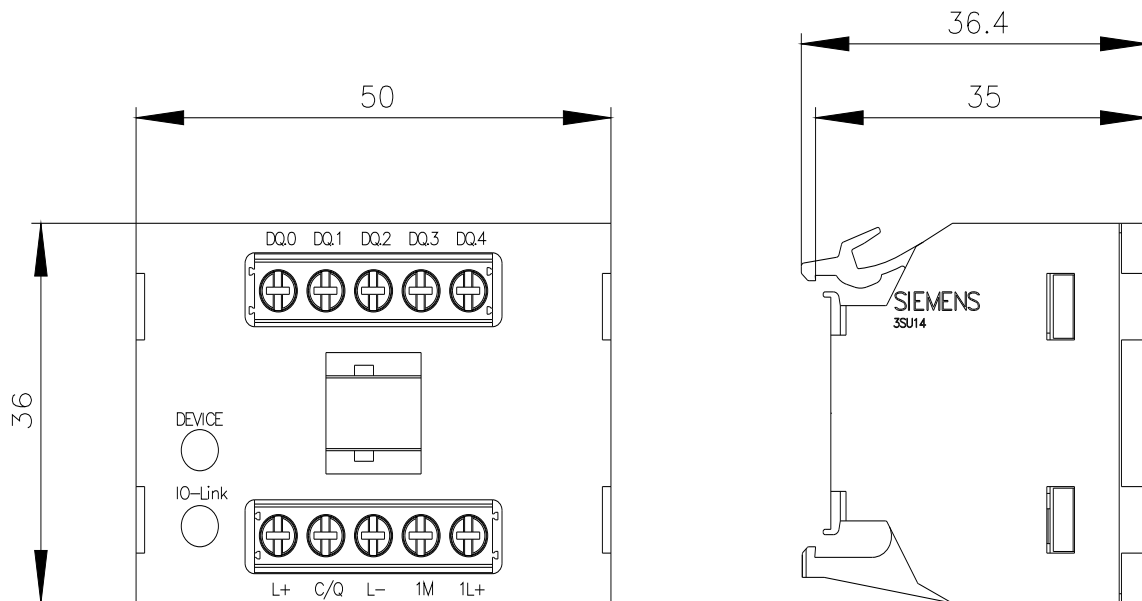

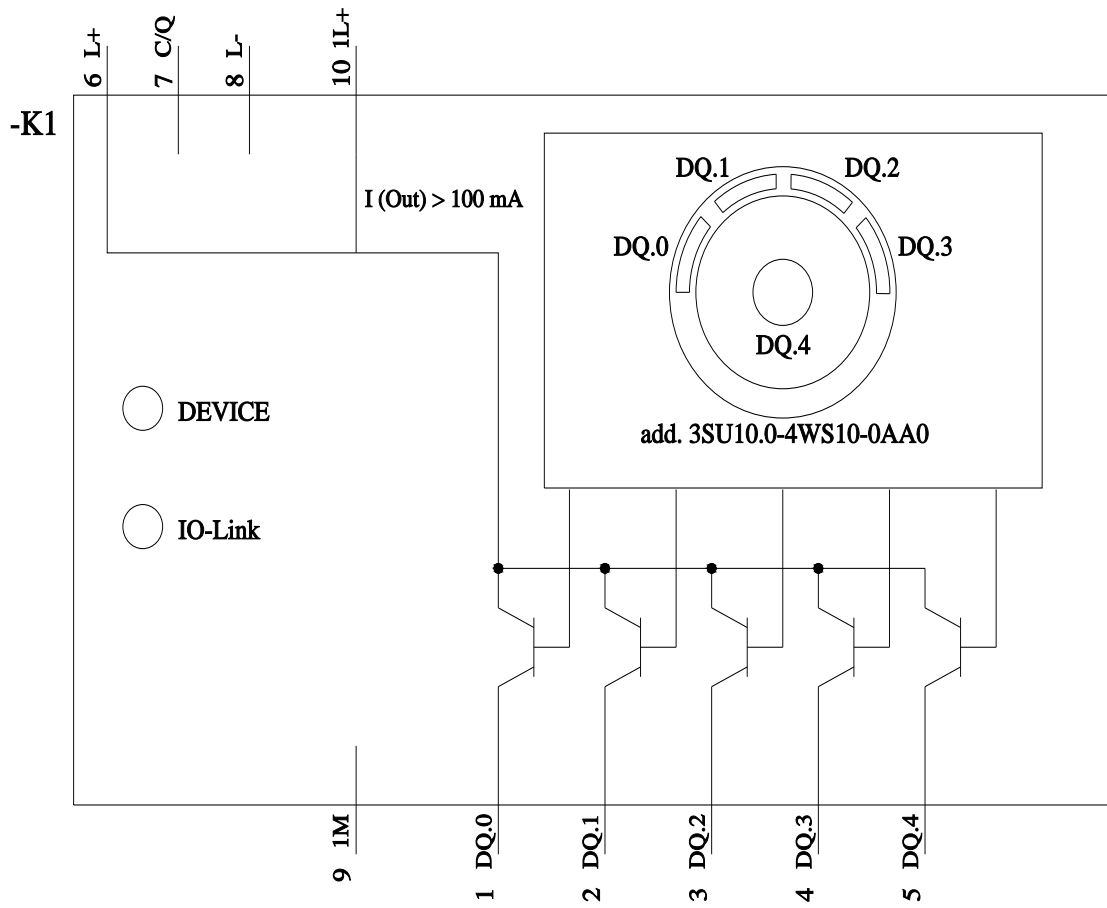

last modified:

4/8/2024