



AS-Interface function module LOGO! standard slave IP20 4 DI/4 DQ Can be used for device series LOGO! 6 and LOGO! 7

**General technical data**

design of the product		AS-Interface connection for LOGO!
Type		4 inputs (virtual) / 4 outputs (virtual)
design of the slave type		standard slave
Supply voltage DC	V	24
Status display display of AS-Interface/diagnostics		green/red dual LED

**Inputs**

number of digital inputs		4
--------------------------	--	---

**Outputs**

number of digital outputs		4
---------------------------	--	---

**Ambient conditions**

ambient temperature during operation	°C	0 ... 55
protection class IP		IP20

**Mechanical data**

width	mm	36
height	mm	90
depth	mm	58
fastening method		on standard rail

**Certificates/ approvals**

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Miscellaneous](#)

**Test Certificates      Shipping Approval**

[Special Test Certificate](#)



**other**



[Confirmation](#)

[Miscellaneous](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1400-0CE10-0AA2>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1400-0CE10-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1400-0CE10-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1400-0CE10-0AA2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1400-0CE10-0AA2&lang=en)

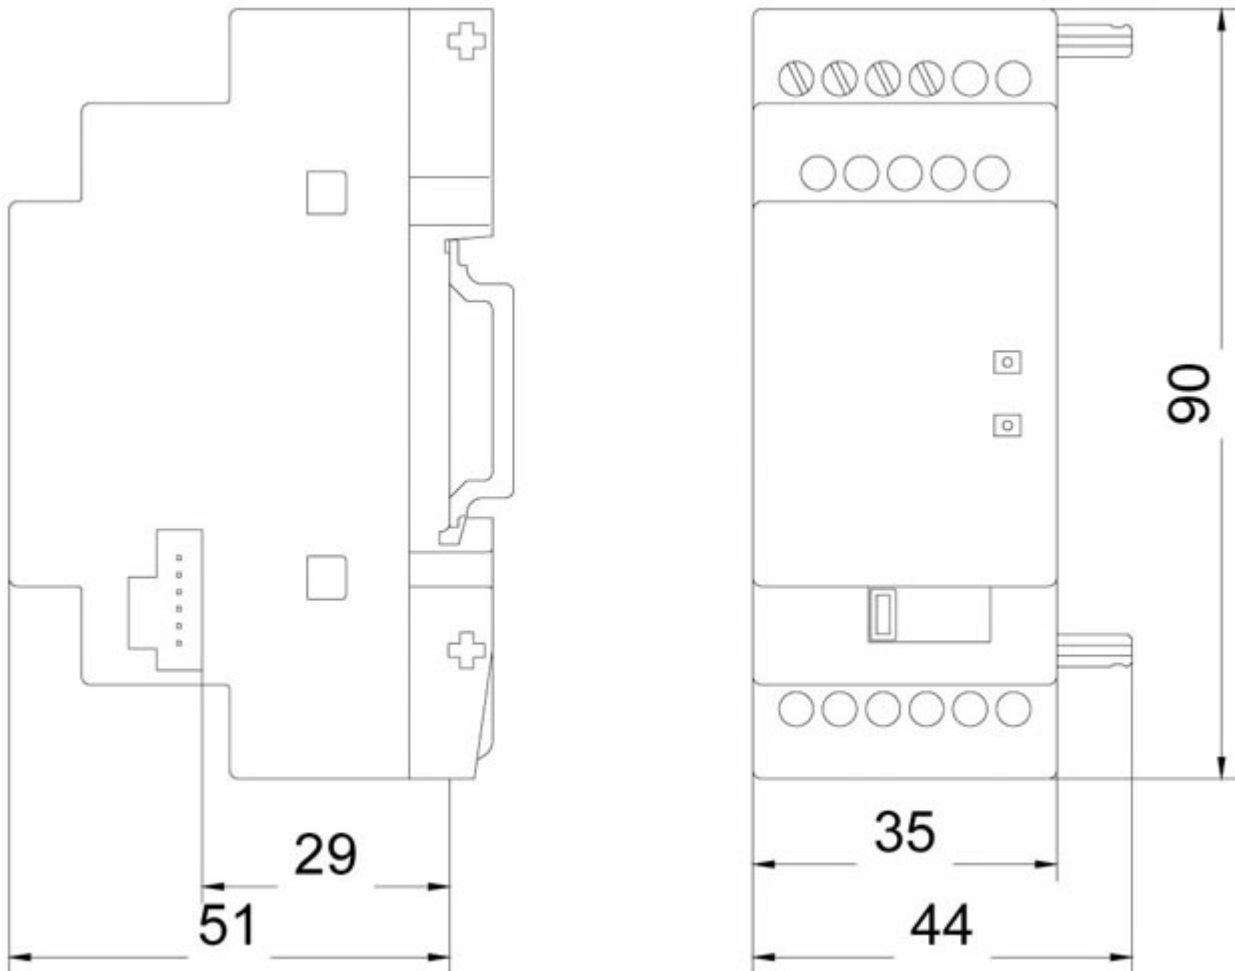

last modified:

12/29/2020