## SIEMENS

## Data sheet

## 3TG1010-0AG2



Power relay, AC-3 8.4 A, 4 kW / 400 V 4 NO, 110 V AC, 45...450 Hz 3 pole, screw terminal

F	igu	re	sin	nilar

reference code acc. to IEC 81346-2	К			
Substance Prohibitance (Date)	01.07.2006 00:00:00			
ambient temperature during operation	-25 +55 °C			
number of poles	4			
number of NO contacts for main contacts	3			
number of NC contacts for main contacts	0			
type of voltage	AC			
operational current				
<ul> <li>at AC-1 at 400 V rated value</li> </ul>	20 A			
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	8.4 A			
operating power				
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	4 kW			
control supply voltage at AC				
• at 50 Hz rated value	110 110 V			
• at 60 Hz rated value	110 110 V			
supply voltage frequency for auxiliary and control circuit rated value	45 450 Hz			
number of NC contacts for auxiliary contacts	0			
number of NO contacts for auxiliary contacts	1			
number of CO contacts for auxiliary contacts	0			
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail			
<ul> <li>side-by-side mounting</li> </ul>	Yes			
height	62 mm			
width	36 mm			
depth	60 mm			
type of electrical connection				
<ul> <li>for main current circuit</li> </ul>	screw-type terminals			
<ul> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals			
Safety related data				
protection class IP on the front acc. to IEC 60529	IP00			
Further information				
Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system)				
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TG1010-0AG2				
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TG1010-0AG2				


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


## https://support.industry.siemens.com/cs/ww/en/ps/3TG1010-0AG2


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <u>http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3TG1010-0AG2&lang=en</u> Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3TG1010-0AG2/char

Further characteristics (e.g. electrical endurance, switching frequency)





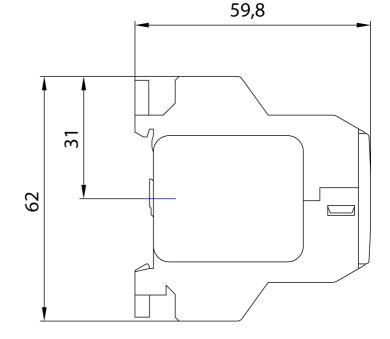

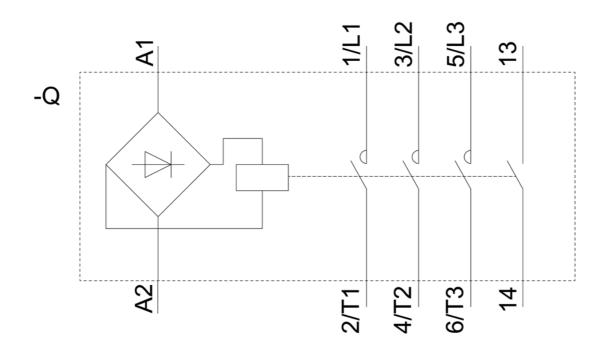

last modified:

12/23/2020 🖸