



Figure similar

Temperature monitoring relay PT100/1000, KTY83/84, NTC 2 threshold values digitally adjustable -58 °F to 932 °F 24 - 240 V AC/DC 2 x 1 CO + 1 NO, Width 45 mm Spring-type terminal

product brand name	SIRIUS
product designation	Temperature monitoring relay
product type designation	3RS20
General technical data	
product function	temperature monitoring
reference code acc. to IEC 81346-2	K
measurable Fahrenheit temperature	
• initial value	-58 °F
• full-scale value	932 °F
Substance Prohibance (Date)	01.05.2012 00:00:00
product function	
• error memory	Yes
• external reset	Yes
design of the sensor connectable	PT100/1000, KTY83/84, NTC (resistance sensors)
Control circuit/ Control	
control supply voltage 1 at AC	
• at 50 Hz	24 ... 240 V
• at 60 Hz	24 ... 240 V
control supply voltage 1	
• at DC	24 ... 240 V
supply voltage frequency for auxiliary and control circuit	50 ... 60 Hz
number of measuring circuits	1
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	2
Connections/ Terminals	
type of electrical connection	
• for auxiliary and control circuit	spring-loaded terminals
type of electrical connection plug-in socket	Yes
Installation/ mounting/ dimensions	
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail
height	108 mm
width	45 mm
depth	91 mm
Ambient conditions	
ambient temperature	
• during operation	-25 ... +60 °C

Certificates/ approvals

General Product Approval	Declaration of Conformity	Test Certificates	other		
 CCC	 UL		 EG-Konf.	Type Test Certificates/Test Report	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RS2040-2GW50>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RS2040-2GW50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RS2040-2GW50>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RS2040-2GW50&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RS2040-2GW50/manual>

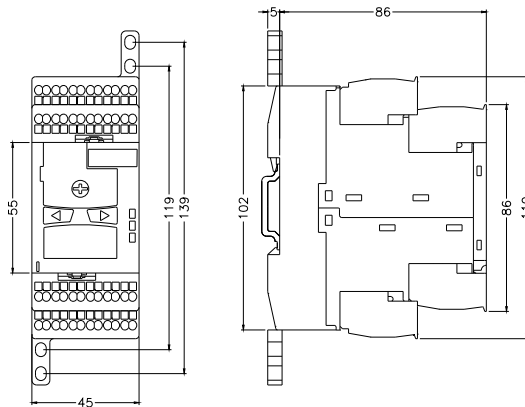

last modified:

5/1/2021 